

**Civil Engineering and Development Department**

**Environmental Monitoring Works at  
Kai Tak Development  
Water, Sediment & Odour Quality Report  
July and August 2014**

## TABLE OF CONTENTS

	<b>Page</b>
<b>EXECUTIVE SUMMARY .....</b>	<b>1</b>
Introduction .....	1
General water quality monitoring works .....	1
Odour Sampling Works.....	1
Odour Patrol Works .....	1
Sediment Monitoring Works.....	1
1. Introduction .....	2
Background .....	2
2. General Water Quality monitoring .....	3
Monitoring Requirements .....	3
Monitoring Locations .....	3
Monitoring Equipment .....	4
Monitoring Parameters .....	7
Monitoring Frequency .....	7
Monitoring Methodology .....	8
Laboratory Analytical Methods.....	8
QA/QC Requirements .....	10
Results and Observation.....	10
3. Odour Sampling .....	12
Sampling Requirements .....	12
Monitoring Requirements .....	12
Monitoring Locations .....	13
Monitoring Equipment .....	13
Monitoring Parameters and Frequency.....	15
Laboratory Analytical Methods.....	16
<i>Olfactometry Analysis in Laboratory (The Hong Kong Polytechnic University)</i> .....	16
QA/QC Requirements .....	17
Results and Observation.....	17
4. Odour Patrol .....	18
Monitoring Methodology .....	18
Odour Patrol Survey .....	18
Monitoring Equipment .....	19
Calibration of In Situ Instruments .....	20
Odour Patrol Results and On-Site Observations .....	20
5. Sediment monitoring .....	27
Monitoring Locations .....	27
Monitoring Parameters and Frequency.....	28
Sampling Procedure .....	28
Details of Testing .....	29
QA/QC Requirements .....	29
Monitoring Equipment .....	30
Results and Observation.....	30
6. Conclusion.....	32

## **LIST OF TABLES**

Table 2.1	Water Quality Monitoring Stations
Table 2.2	Water Quality Monitoring Equipment
Table 2.3	Water Quality Monitoring Parameters
Table 2.4	Methods for Laboratory Analysis for Water Samples
Table 2.5	Water Depth of Water Quality Monitoring Stations
Table 3.1	Odour Sampling Stations
Table 3.2	Equipment for Odour Monitoring Program
Table 3.3	Odour Sampling Parameters and Frequency
Table 4.1	Equipment for Odour Monitoring Program
Table 4.2a	Summary of Odour Patrol Results in July 2013
Table 4.2b	Summary of Odour Patrol Results in August 2013
Table 5.1	Sediment Monitoring Stations
Table 5.2	Sediment Monitoring Parameters and Frequency
Table 5.3	Testing Parameters, Reporting Limit and Analytical Method
Table 5.4	Equipment for Sediment Monitoring Program
Table 5.5	Water Depth at Sediment Monitoring Stations

## **LIST OF FIGURES**

Figure 1	Locations of Water Quality Monitoring Stations
Figure 2	Locations of Odour and Sediment Monitoring Stations
Figure 3	Locations of Odour Patrol Route and Sniffing Locations

## **LIST OF APPENDIX**

Appendix A1	Copies of calibration certificates for Water Quality Monitoring
Appendix A2	Copies of calibration certificates for Odour Sampling
Appendix A3	Copies of calibration certificates for Sediment Monitoring
Appendix A4	Copies of Calibration Certificates for Odour Patrol
Appendix A5	Certificate for a Qualified Odour Panel Member
Appendix B	Environmental Monitoring Schedule
Appendix C1	Laboratory Testing Report for Water Quality Monitoring
Appendix C2	Laboratory Testing Report for Odour Sampling
Appendix C3	Laboratory Testing Report for Sediment Monitoring
Appendix D1	Quality Control Report for Water Quality Monitoring
Appendix D2	Quality Control Report for Sediment Monitoring
Appendix E1	<i>In-situ</i> Measurement Results for Marine Water Quality Monitoring
Appendix E2	<i>In-situ</i> Measurement Results for Odour Sampling
Appendix E3	<i>In-situ</i> Measurement Results for Sediment Monitoring
Appendix E4	Results of Odour Patrol Survey in July and August 2014
Appendix F	Meteorological data from Hong Kong Observatory Station during Odour Sampling and Odour Patrol

## EXECUTIVE SUMMARY

### Introduction

1. This is the 19<sup>th</sup> Water, Sediment & Odour Report for Environmental Monitoring Works for Kai Tak Development during construction phase (the Project). This report documents the results and findings of the 13<sup>th</sup> general water quality monitoring works, 7<sup>th</sup> odour sampling, 7<sup>th</sup> sediment monitoring and 16<sup>th</sup> & 17<sup>th</sup> odour patrol conducted for the Project in July and August 2014.

### General water quality monitoring works

2. General marine water quality monitoring shall be carried out quarterly at the designated locations to give adequate coverage of different tidal states during both wet and dry seasons. During each survey event, sampling shall be taken at 2 tide conditions (mid-flood and mid-ebb). The 13<sup>th</sup> General Water Quality Monitoring for the Project was performed on 18<sup>th</sup> August 2014 and the monitoring results were checked and reviewed.

### Odour Sampling Works

3. Odour sampling shall be carried out within Kai Tak Approach Channel (KTAC) and Kowloon Tong Typhoon Shelter (KTTS) as well as along To Kwa Wan (TKW) and Ma Tau Kok (MTK) waterfront half-yearly interval to determine the odour emissions from water surface throughout the Contract and Maintenance Period. The first odour sampling shall be carried within the August of 2011 or as agreed with the Engineer. One of the sampling events within each calendar year shall be undertaken during summer season (i.e. July or August). The 7<sup>th</sup> Odour Sampling for the Project was performed on 22<sup>nd</sup> August 2014 and the monitoring results were checked and reviewed.

### Odour Patrol Works

4. Odour patrol shall be carried out in the month of February, May, July, August, September and November along the same odour route and at the same sniffing locations. The first odour patrol shall be carried out within November 2011. The 16<sup>th</sup> and 17<sup>th</sup> odour patrol for the Project was performed on 14<sup>th</sup>, 15<sup>th</sup>, 24<sup>th</sup> & 25<sup>th</sup> July 2014 (Daytime – high tide and Evening / Night time – low tide) and 12<sup>th</sup>, 22<sup>nd</sup>, 25<sup>th</sup>, 26<sup>th</sup> & 27<sup>th</sup> August 2014 (Daytime – high tide and Evening / Night time – low tide) respectively. All monitoring results were checked and reviewed.

### Sediment Monitoring Works

5. Sediment monitoring shall be carried out at the same locations of the odour sampling stations half-yearly interval throughout the Contract Period. The first sediment sampling shall be carried out within the August of 2011 or as agreed with the Engineer. The 7<sup>th</sup> Sediment Monitoring for the Project was performed on 30<sup>th</sup> August 2014 and the monitoring results were also checked and reviewed.

## **1. Introduction**

### **Background**

- 1.1 In accordance with the approved Kai Tak Development (KTD) Schedule 3 EIA, improvements works have been proposed to alleviate the potential odour impact from Kai Tak Approach Channel (KTAC) and Kwan Tong Typhoon Shelter (KTTS). In order to monitor the effectiveness and impacts of the proposed works, environmental monitoring works of water, sediment and odour quality were conducted for Kai Tak Development (the Project).
- 1.2 This is the 19<sup>th</sup> Water, Sediment & Odour Quality Monitoring Reports summarizing the general water quality monitoring works, odour and sediment monitoring works for the Project in July and August 2014.

## 2. General Water Quality monitoring

### Monitoring Requirements

- 2.1 General marine water quality monitoring shall be carried out quarterly at the designated locations to give adequate coverage of different tidal states during both wet and dry seasons.
- 2.2 The first general marine water quality monitoring during construction phase shall be carried out within the summer season of 2011 or as agreed with the Engineer.
- 2.3 For all the monitoring stations, sampling was taken 3 water depths, namely 1m below the water surface, mid depth and 1m above the sea bed. For stations that are less than 3m in depth, only the mid depth sample was taken. Mid-depth was omitted in case the water depth is less than 6m. During each survey event, sampling was taken at 2 tide conditions (mid-flood and mid-ebb).
- 2.4 For the WSD intake points, the monitoring was conducted at the appropriate vertical levels of the abstraction points of these intakes to collect water quality information.
- 2.5 At each monitoring station, duplicate samples were collected at each water depth.
- 2.6 Sufficient volume of each water sample (not less than 1 litre) was collected for analysis to achieve the required detection limit. *In-situ* measurements at DO, pH, salinity, temperature and turbidity were taken at 0.5m depth intervals at all the marine water quality monitoring stations.

### Monitoring Locations

- 2.7 The monitoring locations include seven stations within the approach channel (AC1-7), one station at the KTTS (KT1), three stations at inner Kowloon Bay (IB1-3), one station at outer Kowloon Bay (OB1), two stations in the Victoria Harbour adjacent to the Kowloon Bay (VH1-2), one station in the vicinity of Jordan Valley Culvert (JVC), one station Kai Tak Nullah (KTN) and four stations at the WSD flushing water intakes. The locations are also summarized in Table 2.1 and shown on **Figure 1**.

**Table 2.1 Water Quality Monitoring Stations**

Monitoring Stations	Coordinates	
	Northing	Easting
AC1	820147.04	838736.55
AC2	820218.32	838807.83
AC3	819920.71	838952.22
AC4	819988.82	839030.88
AC5	819690.85	839214.12
AC6	819755.00	839278.27
AC7	819545.62	839418.24
KT1	819010.57	840260.66
IB1	819861.53	838265.60
IB2	819465.93	838456.29
IB3	819176.01	838054.63
OB1	819134.25	839182.22
VH1	817553.42	837739.09
VH2	817588.53	840243.13
KTN	820399.67	838776.18
JVC	819940.86	839165.73
WSD Intake at Tai Wan	818268.40	837952.00
WSD Intake at Cha Kwo Ling	817836.40	841544.20
WSD Intake at Quarry Bay	817056.00	839752.00
WSD Intake at Sai Wan Ho	816451.38	841215.41

## Monitoring Equipment

### Dissolved Oxygen (DO) and Temperature Measuring Equipment

- 2.8 The instrument for measuring dissolved oxygen and temperature was portable and weatherproof complete with cable, sensor, comprehensive operation manuals and use DC power source. It was capable of measuring:
- a dissolved oxygen level in the range of 0-20 mg/L and 0-200% saturation; and
  - a temperature of 0-45 degree Celsius.
- 2.9 It has a membrane electrode with automatic temperature compensation complete with a cable.
- 2.10 Sufficient stocks of spare electrodes and cables were available for replacement where necessary.
- 2.11 Salinity compensation was built-in in the DO equipment.

### Turbidity

- 2.12 Turbidity was measured *in situ* by the nephelometric method. The instrument was portable and weatherproof using a DC power source complete with cable, sensor and comprehensive operation manuals. The equipment was capable of measuring turbidity

between 0-1000 NTU. The probe cable was not less than 25m in length. The meter was calibrated in order to establish the relationship between NTU units and the levels of suspended solids. The turbidity measurement was carried out on split water sample collected from the same depths of suspended solids samples.

### **Sampler**

- 2.13 A water sampler, consisting of a transparent PVC or glass cylinder of a capacity of not less than two litres which can be effectively sealed with cups at both ends was used. The water sampler has a positive latching system to keep it open and prevent premature closure until released by a messenger when the sampler was at the selected water depth.

### **Water Depth Detector**

- 2.14 A portable, battery-operated echo sounder was used for the determination of water depth at each designated monitoring station.

### **pH**

- 2.15 The instrument was consisting of a potentiometer, a glass electrode, a reference electrode and a temperature-compensating device. It was readable to 0.1pH in a range of 0 to 14. Standard buffer solutions of at least pH 7 and pH 10 were used for calibration of the instrument before and after use.

### **Salinity**

- 2.16 A portable salinometer capable of recording salinity within the range of 0-40 ppt was used for salinity measurements.

### **Position System**

- 2.17 A hand held differential Global Positioning System (GPS) was used during water quality monitoring to ensure the monitoring vessel is at the correct location before taking measurements. GPS was calibrated at checkpoint (Quarry Bay Survey Nail at Easting 840683.49 and Northing 816709.55) to ensure the monitoring station was at the correct position before taking measurement and water samples.

### **Sample Container and Storage**

- 2.18 Following collection, water samples for laboratory analysis were stored in high density polythene bottles with appropriate preservatives added, packed in ice (cooled to 4°C without being frozen), delivered to the laboratory and analysed as soon as possible. Sufficient volume of samples was collected to achieve the detection limit.
- 2.19 For the sample containers for *E. coli*, the water samples were collected in sterile bottles with leakproof lids.

### **Calibration of *In Situ* Instruments**

- 2.20 All *in situ* monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or other international accreditation scheme before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the water quality monitoring programme. Responses of sensors and electrodes were checked with certified standard solutions before each use. Wet bulb calibration for a DO meter was carried out before measurement at each monitoring event.
- 2.21 For the on site calibration of field equipment (Multi-parameter Water Quality System), the BS 1427:2009, "Guide to on-site test methods for the analysis of waters" was observed.
- 2.22 Sufficient stocks of spare parts were maintained for replacements when necessary. Backup monitoring equipment was also being made available so that monitoring can proceed uninterrupted even when some equipment was under maintenance, calibration, etc.
- 2.23 Table 2.2 summarizes the equipment used in the water quality monitoring program. Copies of the calibration certificates of the equipment are shown in **Appendix A1**.

**Table 2.2 Water Quality Monitoring Equipment**

Equipment	Model and Make	Qty.
Water Sampler	Kahlsico Water-Bottle Model 135DW 150	2
Multi-parameter Water Quality System	YSI 6820-C-M	2
Monitoring Position Equipment	"Magellan" Handheld GPS Model GPS-320	2
Water Depth Detector	Fishfinder 140	2

### Monitoring Parameters

- 2.24 The monitoring parameters to be measured *in-situ* and in laboratory are summarized in Table 2.3.

**Table 2.3 Water Quality Monitoring Parameters**

<b>In-situ Measurement</b>	<b>Laboratory Measurement</b>
Dissolved Oxygen	Suspended Solids (SS)
pH	<i>E. coli</i>
Water Temperature	5-day Biochemical Oxygen Demand (BOD <sub>5</sub> )
Salinity	Ammonia Nitrogen (NH <sub>3</sub> -N)
Secchi disc depth	Unionized Ammonia (UIA)
Turbidity	Total Kjeldahl Nitrogen (TKN)
	Nitrite-nitrogen (NO <sub>2</sub> -N)
	Nitrate-nitrogen (NO <sub>3</sub> -N)
	Ortho-phosphate (PO <sub>4</sub> )
	Total Phosphorous (TP)
	Cadmium (Cd)
	Chromium (Cr)
	Copper (Cu)
	Mercury (Hg)
	Nickel (Ni)
	Lead (Pb)
	Silver (Ag)
	Zinc (Zn)

- 2.25 Monitoring location/position, time, water depth, sampling depth, pH, salinity, DO saturation, water temperature, tidal stages, weather conditions and any special phenomena or work underway nearby were recorded.

### Monitoring Frequency

- 2.26 General marine water quality monitoring shall be carried out quarterly at the designated locations to give adequate coverage of different tidal states during both wet and dry seasons.
- 2.27 During each survey event, sampling will be taken at 2 tide conditions (mid-flood and mid-ebb) to give adequate coverage of different tidal states during both wet and dry seasons. The water quality monitoring period had covered the mid-flood tide and/or mid-ebb tide.

- 2.28 The monitoring will be ceased in the events of any emergency sewage discharges from the preliminary treatment works (PTWs) on both sides of the Victoria Harbour. Monitoring will be avoided during and after any storm events where sewage overflow may be anticipated from the PTWs. There will not be any marine construction activities in the vicinity of the stations during the monitoring.
- 2.29 The water quality monitoring schedule in the reporting period is provided in **Appendix B**.

### **Monitoring Methodology**

- 2.30 The monitoring stations were accessed using survey boat to within 3 m by the guide of a hand-held Global Positioning System (GPS). The depth of the monitoring location was measured using depth meter in order to determine the sampling depths. Afterwards, the probes of the in-situ measurement equipment were lowered to the predetermined depths (1 m below water surface, mid-depth and 1 m above seabed) and the measurements were carried out accordingly. The in-situ measurements at predetermined depths were carried out in duplicate. In case the difference in the duplicate in-situ measurement results was larger than 25%, the third set of in-situ measurement would be carried out for result confirmation purpose.
- 2.31 Water sampler was lowered into the water to the required depths of sampling. Upon reaching the pre-determined depth, a messenger to activate the sampler was then released to travel down the wire. The water sample was sealed within the sampler before retrieving. At each station, water samples at three depths (1 m below water surface, mid-depth and 1 m above seabed) were collected accordingly. Water samples were stored in a cool box and kept at less than 4°C but without frozen and sent to the laboratory as soon as possible. In addition, field information as described in Section 2.25 was also recorded.

### **Laboratory Analytical Methods**

- 2.32 The testing of all parameters was conducted by Wellab Ltd. (HOKLAS Registration No.083) and comprehensive quality assurance and control procedures in place in order to ensure quality and consistency in results. The testing method, lowest detection limit and limit of reporting are provided in Table 2.4.

**Table 2.4 Methods for Laboratory Analysis for Water Samples**

Determinant	Proposed Method	Limit of Reporting	Lowest Detection Limit
Cadmium (Cd)	In-house Method SOP 053 (ICP-ES) and SOP 076 (ICP-MS) [Ref. Method: APHA 19e 3030F 3b and 3120B, USEPA 3005A & 6020A]	0.1 µg/L	0.1 µg/L
Chromium (Cr)		0.2 µg/L	0.2 µg/L
Copper (Cu)		0.2 µg/L	0.2 µg/L
Silver (Ag)		0.2 µg/L	0.2 µg/L
Nickel (Ni)		0.2 µg/L	0.2 µg/L
Zinc (Zn)		0.4 µg/L	0.4 µg/L
Lead (Pb)		0.2 µg/L	0.2 µg/L
Mercury (Hg)		0.2 µg/L	0.2 µg/L
Suspended Solids (SS)	APHA 17ed 2540 D	0.5 mg/L	0.5 mg/L
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> )	APHA 19ed 5210 B	2 mg-O <sub>2</sub> /L	0.4 mg-O <sub>2</sub> /L
Ammonia Nitrogen (NH <sub>3</sub> -N)	In-house method SOP057 (FIA) [Ref. Method: APHA 20e 4500-NH <sub>3</sub> H (FIA)]	0.01mg NH <sub>3</sub> -N/L	0.01mg NH <sub>3</sub> -N/L
Unionized Ammonia (UIA)	By Calculation	0.001mg/L	-
Total Kjeldahl Nitrogen (TKN)	In-house method SOP058(FIA) [Ref. Method: APHA 20e 4500-Norg A,B,D (FIA)]	0.1mg N/L	0.1mg N/L
Nitrite-nitrogen (NO <sub>2</sub> -N)	In-house Method SOP068 (FIA) [Ref. Method: APHA 20e 4500-NO <sub>2</sub> B (FIA)]	0.002 mg NO <sub>2</sub> <sup>-</sup> -N/L	0.002 mg NO <sub>2</sub> <sup>-</sup> -N/L
Nitrate-nitrogen (NO <sub>3</sub> -N)	In-house Method SOP056 (FIA) [Ref. Method: APHA 20e 4500-NO <sub>3</sub> <sup>-</sup> F (FIA)]	0.01 mg NO <sub>3</sub> <sup>-</sup> -N/L	0.01 mg NO <sub>3</sub> <sup>-</sup> -N/L
<i>E. coli</i>	In-house method SOP069 (Membrane Filtration Method by CHROMagar) [Ref. Method: APHA 20e 9221E & 9222D]	1 cfu/100mL	1 cfu/100mL
Ortho-phosphate (PO <sub>4</sub> <sup>3-</sup> )	In-house Method SOP054 (FIA) [Ref. Method: APHA 20e 4500-P A,F,G (FIA)]	0.01mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.01mg PO <sub>4</sub> <sup>3-</sup> -P/L
Total Phosphorous (TP)	In-house Method SOP 055 (FIA) [Ref. Method: APHA 20e 4500-P B,E,F,H (FIA)]	0.01 mg-P/L	0.01 mg-P/L

- 2.33 To calculate the amount of unionized ammonia present (UIA), the Total Ammonia Nitrogen (TAN) must be multiplied by the appropriate factor based on the pH and temperature from the water sample. The calculation is in accordance with Ambient Water Quality Criteria for Ammonia published by United States Environmental Protection Agency. The lowest reporting limit of UIA is 0.001mg/L.

## QA/QC Requirements

### Decontamination Procedures

- 2.34 Water sampling equipment used during the course of the monitoring programme was decontaminated by manual washing and rinsed clean seawater/distilled water after each sampling event. All disposal equipment was discarded after sampling.

### Sampling Management and Supervision

- 2.35 Water samples were dispatched to the testing laboratory for analysis as soon as possible after the sampling. All samples were stored in a cool box and kept at less than 4°C but without frozen. All water samples were handled under chain of custody protocols and relinquished to the laboratory representatives at locations specified by the laboratory.

### Quality Control Measures for Sample Testing

- 2.36 The samples testing were performed by HOKLAS accredited laboratories. The following quality control programme was performed by the laboratories for each batch of samples:
- ✧ Method blank;
  - ✧ Sample duplicate (at 5% level i.e. one for every 20 samples);
  - ✧ Sample spike (at 5% level i.e. one for every 20 samples); and
  - ✧ Quality control samples.

## Results and Observation

- 2.37 The general water quality monitoring was conducted on 18<sup>th</sup> August 2014.
- 2.38 No notification of emergency sewage discharges from the preliminary treatment works (PTWs) on both sides of the Victoria Harbour and marine construction activities in the vicinity of the stations during the monitoring works. No Monitoring was conducted during and after any storm events where sewage overflow may be anticipated from the PTWs.
- 2.39 The weather during the sampling at mid-ebb tide and mid-flood tide was cloudy and sunny.
- 2.40 No special phenomena near the monitoring stations were observed during the monitoring works.
- 2.41 No marine activities were conducted in the vicinity of the stations during the monitoring.

- 2.42 The laboratory testing report and QC report are provided in **Appendix C1** and **Appendix D1** respectively.
- 2.43 The water depth of each monitoring station at mid-ebb and mid flood tide is shown in Table 2.5 and the *in-situ* measurement results including dissolved oxygen, turbidity, salinity, pH, secchi disc depth and temperature of the general water quality monitoring are provided in **Appendix E1**.

**Table 2.5 Water Depth of Water Quality Monitoring Stations**

Water Quality Monitoring Stations	Water Depth (m)	
	Mid-Ebb	Mid-Ebb
AC1	3.5	3.5
AC2	4.0	4.0
AC3	4.0	4.0
AC4	4.5	4.5
AC5	4.5	4.5
AC6	4.5	4.5
AC7	5.5	5.5
KT1	6.0	6.0
IB1	6.0	6.0
IB2	7.0	7.0
IB3	8.0	8.0
OB1	7.0	7.0
VH1	22.0	22.0
VH2	17.0	17.0
KTN	1.0	1.0
JVC	4.5	4.5
WSD Intake at Tai Wan	10.0	10.0
WSD Intake at Cha Kwo Ling	9.0	9.0
WSD Intake at Quarry Bay	12.0	12.0
WSD Intake at Sai Wan Ho	13.0	13.0

### 3. Odour Sampling

#### Sampling Requirements

- 3.1 The odour sampling shall be carried out within Kai Tak Approach Channel (KTAC) and Kwun Tong Typhoon Shelter (KTTS) as well as To Kwa Wan (TKW) and Ma Tau Kok (MTK) waterfront at half-yearly interval to determine the odour emissions from water surface throughout the Contract and Maintenance Period.
- 3.2 The first odour sampling shall be carried within the August of 2011 or as agreed with the Engineer. One of the sampling events within each calendar year shall be undertaken during summer season (i.e. July or August).
- 3.3 In order to capture more representative results, measurements and sampling will be conducted during low tide periods with reference to the tidal chart of Hong Kong Observatory for KTAC, KTTS and TKW.
- 3.4 The relevant meteorological data (e.g. ambient temperature, wind speed and direction, etc.) from the Hong Kong Observatory station during the measurement/sampling period were recorded for reference.
- 3.5 The odour sample was not contaminated, lost, or altered during storage. In this regard, the odour sampling bag was:
  - Odour-free, i.e. they will not add odours to the sample;
  - Made of materials which does not absorb or react with odorous samples;
  - Sufficiently impervious to prevent any significant loss of odour components;
  - Reasonably robust;
  - Leak-free;
  - Equipped with leak-free fittings, compatible with olfactometer and other sampling equipment; and
  - Of sufficient capacity to enable the completion of the tests.

- 3.6 Exposure of samples to direct sunlight was avoided to minimize photochemical reactions.

#### Monitoring Requirements

- 3.7 The following parameters were also monitored at each of the measurement locations.
  - Dissolved oxygen (DO) (% saturation) in the water column at depth 1m above seabed;
  - Dissolved oxygen (DO) (mg/L) in the water column at depth 1m above seabed;
  - Water Temperature (°C) at depth 1m above seabed;
  - Ambient Air Temperature (°C)
  - Water depth (m)
  - Salinity (parts per thousand) at depth 1m above seabed;

- Redox Potential (mV) at depth 1m above seabed; and
- pH at depth 1m above seabed.

### **Monitoring Locations**

3.8 Thirteen monitoring stations are proposed for the odour sampling. The locations are also summarized in Table 3.1 and shown on **Figure 2**.

**Table 3.1 Odour Sampling Stations**

Location ID	Sampling Location	Coordinates	
		Easting	Northing
SA1	Northern KTAC, in the vicinity of Kai Tak Nullah (KTN)	838744.13	820311.91
SA2	Northern KTAC	838840.95	820030.07
SA3	Northern KTAC, in the vicinity of Jordan Valley Culvert (JVC) Outfall	839163.99	819942.90
SA4	Southern KTAC	839407.66	819537.90
SA5		839580.35	819512.47
SA6		839647.87	819329.45
SA7	KTTS	840122.60	819275.72
SA8		840270.71	819015.35
SA9		840479.55	818798.14
SA10	Kowloon Bay (between runway opening and TKWTS)	838694.90	819582.080
SA11	MTK waterfront, at the end of Ma Tau Kok Road	838138.20	820038.77
SA12	TKW waterfront, near Vehicle Examination Centre	837982.97	819704.84
SA13	Hoi Sham Park waterfront	837857.15	819436.94

### **Monitoring Equipment**

#### **Dissolved Oxygen (DO) and Temperature Measuring Equipment**

- 3.9 The instrument for measuring dissolved oxygen and temperature was portable and weatherproof complete with cable, sensor, comprehensive operation manuals and use DC power source. It was capable of measuring:
- a dissolved oxygen level in the range of 0-20 mg/L and 0-200% saturation; and
  - a temperature of 0-45 degree Celsius.
- 3.10 It has a membrane electrode with automatic temperature compensation complete with a cable.
- 3.11 Sufficient stocks of spare electrodes and cables were available for replacement where necessary.
- 3.12 Salinity compensation is built-in in the DO equipment.

### **Water Depth Detector**

- 3.13 A portable, battery-operated echo sounder was used for the determination of water depth at each designated monitoring station.

### **pH**

- 3.14 The instrument was consisting of a potentiometer, a glass electrode, a reference electrode and a temperature-compensating device. It was readable to 0.1pH in a range of 0 to 14. Standard buffer solutions of at least pH 7 and pH 10 were used for calibration of the instrument before and after use.

### **TM39 (mV meter)**

- 3.15 The meter features high accuracy, rugged plastic enclosure, microprocessor controlled evaluation and operation with pH or redox combination electrodes. The measuring range was from -1999 to 1999 mV.

### **Thermo-Anemometer**

- 3.16 The meter capable of record up to 2-hour air velocity averaging for measurements and temperature measurement via built-in thermistor.

### **Salinity**

- 3.17 A portable salinometer capable of recording salinity within the range of 0-40 ppt was be used for salinity measurements.

### **Position System**

- 3.18 A hand held differential Global Positioning System (GPS) was used during odour sampling to ensure the monitoring vessel is at the correct location before taking measurements. GPS was calibrated at checkpoint (Quarry Bay Survey Nail at Easting 840683.49 and Northing 816709.55) to ensure the monitoring station was at the correct position before taking measurement and odour samples.
- 3.19 Table 3.2 summarizes the equipment used in the odour monitoring program. Copies of the calibration certificates of the equipment are shown in **Appendix A2**.

**Table 3.2 Equipment for Odour Monitoring Program**

Equipment	Model and Make	Qty.
Multi-parameter Water Quality System	YSI 6820-C-M	1
mV Meter	TM39	1
Monitoring Position Equipment	"Magellan" Handheld GPS Model GPS-320	1
Thermo-Anemometer	Prova Instruments Inc. (Model No. AVM-01)	1
Water Depth Detector	Fishfinder 140	1

### **Calibration of In Situ Instruments**

- 3.20 All *in situ* monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or other international accreditation scheme before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the water quality monitoring programme. Responses of sensors and electrodes were checked with certified standard solutions before each use. Wet bulb calibration for a DO meter was carried out before measurement at each monitoring event.
- 3.21 The thermo-anemometer was checked and calibrated at yearly intervals.
- 3.22 The BS 1427:2009, "Guide to on-site test methods for the analysis of waters" was observed for the on site calibration of field equipment (Multi-parameter Water Quality System).
- 3.23 Sufficient stocks of spare parts were maintained for replacements when necessary. Backup monitoring equipment was also made available so that monitoring can proceed uninterrupted even when some equipment was under maintenance, calibration, etc.

### **Monitoring Parameters and Frequency**

- 3.24 Table 3.3 summarizes the monitoring parameters and frequencies of the odour sampling at each of the measurement locations.

**Table 3.3 Odour Sampling Parameters and Frequency**

Monitoring Stations	Parameters, unit	Frequency
SA1 SA2 SA3 SA4 SA5 SA6 SA7 SA8 SA9 SA10 SA11 SA12 SA13	<ul style="list-style-type: none"> <li>• Dissolved oxygen (DO) (% saturation) in the water column at depth 1m above seabed;</li> <li>• Dissolved oxygen (DO) (mg/L) in the water column at depth 1m above seabed;</li> <li>• Water Temperature (°C) at depth 1m above seabed;</li> <li>• Ambient Air Temperature (°C)</li> <li>• Water depth (m)</li> <li>• Salinity (parts per thousand) at depth 1m above seabed;</li> <li>• Redox Potential (mV) at depth 1m above seabed; and</li> <li>• pH at depth 1m above seabed.</li> </ul> <p>• One odour sample was collected at each measurement location for olfactometry analysis in laboratory</p>	<ul style="list-style-type: none"> <li>• Half-yearly</li> </ul>

### **Laboratory Analytical Methods**

#### ***Olfactometry Analysis in Laboratory (The Hong Kong Polytechnic University)***

- 3.25 The odour samples were collected using a hood method such as a wind tunnel system with the inflow rate with speed of 0.01 m/s and the odour concentration of the collected air samples were determined by a forced-choice dynamic olfactometer with a panel of human assessors being the sensor in accordance with the European Standard Method: Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725) within 24 hours after collection. About 60L of gas sample was collected at the selected sampling location.
- 3.26 The collected odour samples were delivered to the laboratory (PolyU) within 24 hours after collection.
- 3.27 The odour laboratory was ventilated to maintain an odour-free environment and to provide fresh air to the panel members. Each odour testing session comprised at least five qualified panelists. All of the panelists were screened beforehand by using 50ppm solution/mixture of certified n-butanol standard gas.
- 3.28 The olfactometry method was normally used for a source odour concentration analysis with a detection limit of 10ou/m<sup>3</sup>.

### **QA/QC Requirements**

- 3.29 During each odour sampling day, one blank sample was collected for quality control. The sample was taken by purging pure nitrogen gas into odour sampling bag directly on site as a blank sample.
- 3.30 The olfactometry analysis was conducted by laboratory (PolyU) complying with the European Standard EN13725:2003.
- 3.31 The results of blank sample was below the threshold of olfactometry measurement, which means the on-site filling gas used in this case had no background odour to interfere the results of real odour samples. The laboratory QA/QC results are provided in the laboratory analysis report.

### **Results and Observation**

- 3.32 The odour sampling schedule in the reporting period is provided in **Appendix B**. The odour sampling for 13 locations was conducted during the period of low water level.
- 3.33 The odour sampling was conducted on 22<sup>nd</sup> August 2014.
- 3.34 The weather during the sampling was cloudy.
- 3.35 No marine activities were conducted in the vicinity of the stations during the monitoring.
- 3.36 The following observation near the monitoring stations were recorded during the field works:
  - Smell of sewage was noticed during the sampling at SA1, SA2, SA3 and SA13.
- 3.37 The on-site odour sampling and laboratory olfactometry measurement report prepared by PolyU are provided in **Appendix C2**. The calibration records for the dilution apparatus used for olfactometry measurement are provided in **Appendix A2**.
- 3.38 The in-situ measurement results including dissolved oxygen, water and ambient temperature, water depth, salinity, pH and redox potential are provided in **Appendix E2**.
- 3.39 The relevant meteorological data including ambient temperature, wind speed and wind direction from the Hong Kong Observatory Station during the measurement/sampling period are provided in **Appendix F**.

#### 4. Odour Patrol

##### **Monitoring Methodology**

- 4.1 During the patrol, the patrol members shall conduct the odour intensity analysis. The sequence shall generally start from less odorous locations to stronger odorous locations. The independent trained personnel/competent persons shall use their nose (olfactory sensors) to sniff odours at different locations. The main odour emission sources and the areas to be affected by the odour nuisance shall be identified. No odour patrol shall be conducted during rainy days.
- 4.2 The odour intensity should be determined at 5 different levels according to the criteria below:
- 0 - Not detected. No odour perceived or an odour so weak that it cannot be easily characterised or described;  
1 - Slight Identifiable odour, and slight chance to have odour nuisance;  
2 - Moderate Identifiable odour, and moderate chance to have odour nuisance;  
3 - Strong Identifiable, likely to have odour nuisance;  
4 - Extreme Severe odour, and unacceptable odour level.

##### **Odour Patrol Survey**

- 4.3 Two qualified odour patrol members, Mr. Tang Wing Kwai and Mr. Lee Man Hei were selected for conducting odour patrol. The qualified odour patrol members have their individual n-butanol thresholds complied with the requirement of European Standard Method (EN13725) in the range of 20 to 80 ppb. The certificates for the qualified odour panel members are shown in **Appendix A5**.
- 4.4 The odour patrol along with the odour route with 65 sniffing locations was conducted by the 2 qualified odour patrol members in July and August 2014 during daytime (high tide condition) and evening/night time (low tide condition).
- 4.5 In general, the proposed odour patrol route and the proposed sniffing locations is in the vicinity of the planned ASRs within the Kai Tak Development to determine any potential operational odour impacts arising from Kai Tak Approach Channel (KTAC) and Kwun Tong Typhoon Shelter (KTTS).
- 4.6 Sniffing location no. 35 is shifted to the right side about 100m in compare with the baseline patrol route due to the access problem. In addition, sniffing location no. 29 and 30 are now situated at the restricted area of Cruise Terminal Building (CTB) and therefore it was revised to the landscape deck of CTB which is considered as ASRs. The final odour patrol route and sniffing locations is shown in **Figure 3**.

4.7 The duration of the odour patrol works are shown in the following table:-

Date	Time	Tidal Condition	Patrol Locations	* Height(m)
14 July 2014	16:04 – 19:51	Low Tide	Within Kai Tak Development and Ma Tau Kok Waterfront	0.2 - 0.8
15 July 2014	9:54 – 13:25	High Tide		2.0 - 2.4
15 July 2014	16:14 – 19:41	Low Tide		0.5 - 0.7
24 July 2014	8:48 – 11:51	High Tide		1.3 - 2.0
25 July 2014	9:20	High Tide		2.1
12 August 2014	9:26 – 12:17	High Tide		2.2 - 2.5
22 August 2014	7:56 – 11:15	High Tide		1.3 – 2.1
25 August 2014	16:05 – 19:16	Low Tide		0.7 – 1.2
26 August 2014	16:06 – 19:35	Low Tide		0.7 – 1.2
27 August 2014	11:30 – 12:33	High Tide		1.8 – 2.1

\* Heights of High/Low Tides obtained from The Hong Kong Observatory (Predicted Tides at Quarry Bay)

4.8 During the odour patrol survey, the following findings shall be recorded:

- the prevailing weather condition (sunny, fine, cloudy and rainy);
- the wind direction;
- the local wind speed;
- odour intensity;
- any odour detected during sampling and the flavors of odour with detail description of characteristics (e.g. sewage or rotten egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc);
- potential odour source (exposed sediment, water or sewage; floating debris or material, others (to be specified));
- downwind or upwind direction from the odour source;
- duration of odour (intermittent or continuous) during sampling;
- tidal conditions; and
- time of survey.

4.9 Odour intensity at each location shall be assessed by the 2 odour patrol members, respectively, and all locations are shown in **Figure 3**.

### **Monitoring Equipment**

#### *Thermo-Anemometer*

- 4.10 The meter capable of record up to 2-hour air velocity averaging for measurements and temperature measurement via built-in thermistor.
- 4.11 Table 4.1 summarizes the equipment used in the odour patrol survey. Copies of the calibration certificates of the equipment are shown in **Appendix A4**.

**Table 4.1 Equipment for Odour Monitoring Program**

Equipment	Model and Make	Qty.
Thermo-Anemometer	Prova Instruments Inc. (Model No. AVM-01)	1

**Calibration of In Situ Instruments**

- 4.12 All in situ monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or other international accreditation scheme before use.
- 4.13 The thermo-anemometer was checked and calibrated at yearly intervals.
- 4.14 Backup monitoring equipment was also made available so that monitoring can proceed uninterrupted even when some equipment was under maintenance, calibration, etc.

**Odour Patrol Results and On-Site Observations**

- 4.15 All results of odour patrol survey for 65 sniffing locations in July and August 2014 are summarized in Table 4.2a and b for different routes within Kai Tak Development and Ma Tau Kok Waterfront and the field record sheets are attached in **Appendix E4**.
- 4.16 In addition, meteorological conditions (including temperature, wind speed, wind direction, relative humidity) from the nearest Hong Kong Observatory's Weather Station including King's Park and Kai Tak meteorological stations during the monitoring are provided in **Appendix F**.
- 4.17 During the odour patrol investigation, our patrol members identified different types of flavours including seawater smell, sewage, rubbish, fishy smell, engine oil, smell of chemical toilets and rotten-egg. It is identified by the odour patrol members that these types of flavours mainly result from marine water, water at Kai Tak Nullah, exposed shores, rubbish and other activities near the sniffing locations.
- 4.18 According to Kai Tak Schedule 3 EIA Report, the seawater smell is considered as non-objectionable background smell.
- 4.19 The odour intensity detected at 65 locations was found to be in a wide range from level 0 up to level 1.

**Table 4.2a – Summary of Odour Patrol Results in July 2014**

Sniffing Location	Area	Odour Intensity				General On-site Observation	
		High Tide (Day Time)		Low Tide (Evening/Night time)		Odour nature	Possible source
		OI-1	OI-2	OI-1	OI-2		
1	Kwun Tong Typhoon Shelter	0	0	1	1	fishy smell and seawater smell	marine water
2		0	0	0	0	N/A	N/A
3		0	0	0	0	N/A	N/A
4		0	0	0	0	N/A	N/A
5		0	0	1	1	fishy smell and seawater smell	marine water
6	Southern Kai Tak Approach Channel	0	0	1	1	fishy smell and seawater smell	exposed shores and marine water
7		0	0	1	1	sewage	marine water
8	Northern Kai Tak Approach Channel	1	1	1	1	sewage	marine water
9		1	1	1	1	sewage	marine water
10		1	1	1	1	fishy smell	marine water
11		1	1	1	1	sewage and fishy smell	marine water
12		0	0	0	0	N/A	N/A
13		0	0	1	1	fishy smell	marine water
14		0	0	1	1	fishy smell	marine water
15		0	0	1	1	fishy smell	marine water and exposed shores
16		0	0	0	0	N/A	N/A
17		0	0	0	0	N/A	N/A
18		0	0	0	0	N/A	N/A
19		0	0	0	0	N/A	N/A
20		0	0	0	0	N/A	N/A

21	Southern Kai Tak Approach Channel	0	0	1	0	rubbish smell	exposed shores
22		0	0	1	1	fishy smell	exposed shores
23		0	0	1	1	rubbish and fishy smell	exposed shores
24		0	0	1	1	rubbish smell	exposed shores
25		0	0	1	1	rubbish smell	exposed shores
26		0	0	0	0	N/A	N/A
27	Kai Tak Runway	0	0	0	0	N/A	N/A
28		0	0	1	1	fishy smell	marine water
29		0	0	0	0	N/A	N/A
30		0	0	0	0	N/A	N/A
31		0	0	0	0	N/A	N/A
32		0	0	0	0	N/A	N/A
33		0	0	0	0	N/A	N/A
34		0	0	0	0	N/A	N/A
35		0	0	0	0	N/A	N/A
36	Ma Tau Kok/To Kwan Wan waterfront	1	1	0	0	engine oil	floating oil
37		0	0	0	0	N/A	N/A
38		0	0	0	0	N/A	N/A
39		1	1	0	0	sewage	marine water
40		1	1	1	1	sewage	marine water
41	Upstream section of Kai Tak Nullah	0	0	0	0	N/A	N/A
42		1	1	1	1	sewage	water at Kai Tak Nullah
43		1	1	1	1	sewage	water at Kai Tak Nullah
44		1	1	1	1	sewage	water at Kai Tak Nullah
45	Downstream section of Kai Tak Nullah	1	1	1	1	sewage	water at Kai Tak Nullah
46		0	0	0	0	N/A	N/A
47		1	1	1	1	sewage	water at Kai Tak Nullah
48		0	0	1	1	sewage	water at Kai Tak Nullah
49		1	1	1	1	sewage	water at Kai Tak Nullah
50		0	0	0	0	N/A	N/A

51		0	0	0	0	N/A	N/A
52		1	1	1	1	sewage	water at Kai Tak Nullah
53		1	1	0	0	sewage	water at Kai Tak Nullah
54		1	1	0	0	sewage	water at Kai Tak Nullah
55		0	0	0	0	N/A	N/A
56		0	0	0	0	N/A	N/A
57	Upstream section of Kai Tak Nullah	0	0	1	1	sewage	water at Kai Tak Nullah
58		1	1	1	1	sewage	water at Kai Tak Nullah
59		1	1	1	1	sewage	water at Kai Tak Nullah, chemical toilet nearby
60		0	0	0	0	N/A	N/A
A1	Kwun Tong Typhoon Shelter	0	0	1	1	fishy smell and seawater smell	marine water, exposed sediment
A2		1	1	1	1	sewage and fishy smell	marine water
A3		0	0	1	1	fishy smell	marine water
A4		1	1	1	1	sewage	sewage treatment plant
A5		0	0	0	0	N/A	N/A

**Table 4.2b – Summary of Odour Patrol Results in August 2014**

Sniffing Location	Area	Odour Intensity				General On-site Observation	
		High Tide (Day Time)		Low Tide (Evening/Night time)		Odour nature	Possible source
		OI-1	OI-2	OI-1	OI-2		
1	Kwun Tong Typhoon Shelter	0	0	0	0	N/A	N/A
2		0	0	0	0	N/A	N/A
3		0	0	0	0	N/A	N/A
4		0	0	0	0	N/A	N/A
5		0	0	0	0	N/A	N/A
6	Southern Kai Tak Approach Channel	0	0	0	0	N/A	N/A
7		0	0	0	0	N/A	N/A
8	Northern Kai Tak Approach Channel	0	0	0	0	N/A	N/A
9		0	0	1	1	sewage	marine water
10		0	0	0	0	N/A	N/A
11		0	0	1	1	sewage	marine water
12		0	0	1	1	sewage	marine water
13		0	0	1	1	sewage	marine water
14		0	0	1	1	Sewage	marine water
15		0	0	0	0	N/A	N/A
16		0	0	0	0	N/A	N/A
17		0	0	0	0	N/A	N/A
18		0	0	0	0	N/A	N/A
19		0	0	0	0	N/A	N/A
20		0	0	0	0	N/A	N/A

21	Southern Kai Tak Approach Channel	0	0	0	0	N/A	N/A
22		0	0	0	0	N/A	N/A
23		0	0	0	0	N/A	N/A
24		0	0	0	0	N/A	N/A
25		0	0	0	0	N/A	N/A
26		0	0	0	0	N/A	N/A
27	Kai Tak Runway	0	0	0	0	N/A	N/A
28		0	0	0	0	N/A	N/A
29		0	0	0	0	N/A	N/A
30		0	0	0	0	N/A	N/A
31		0	0	0	0	N/A	N/A
32		1	1	0	0	fishy smell, seawater smell	marine water
33		1	1	0	0	rubbish smell	marine water
34		0	0	0	0	N/A	N/A
35		0	0	0	0	N/A	N/A
36	Ma Tau Kok/To Kwan Wan waterfront	0	0	1	1	sewage	marine water
37		1	1	1	1	Oil, gas exhaust and sewage	marine water and floating oil
38		0	0	1	1	sewage	marine water
39		1	1	1	1	sewage	marine water
40		1	1	1	1	sewage	marine water
41	Upstream section of Kai Tak Nullah	0	0	0	0	N/A	N/A
42		1	1	1	1	sewage	water at Kai Tak Nullah
43		0	0	0	0	N/A	N/A
44		0	0	0	0	N/A	N/A
45	Downstream section of Kai Tak Nullah	0	0	0	0	N/A	N/A
46		0	0	0	0	N/A	N/A
47		1	1	0	0	sewage	water at Kai Tak Nullah
48		0	0	1	1	sewage	water at Kai Tak Nullah
49		1	1	1	1	sewage	water at Kai Tak Nullah
50		1	1	1	1	sewage, Rotten egg smell	water at Kai Tak Nullah

51		1	1	1	1	sewage	water at Kai Tak Nullah
52		1	1	1	1	sewage	water at Kai Tak Nullah
53		0	0	1	1	sewage	water at Kai Tak Nullah
54		0	0	1	1	sewage	water at Kai Tak Nullah
55		0	0	0	0	N/A	N/A
56		0	0	0	0	N/A	N/A
57	Upstream section of Kai Tak Nullah	0	0	0	0	N/A	N/A
58		0	0	0	0	N/A	N/A
59		1	1	1	1	sewage	Chemical toilet nearby, water at Kai Tak Nullah
60		0	0	0	0	N/A	N/A
A1	Kwun Tong Typhoon Shelter	0	0	0	0	N/A	N/A
A2		0	0	0	0	N/A	N/A
A3		0	0	1	1	rubbish	floating rubbish
A4		1	1	1	1	sewage	sewage treatment plant
A5		0	0	0	0	N/A	N/A

## 5. Sediment monitoring

### Monitoring Locations

5.1 Thirteen monitoring stations are proposed for the sediment monitoring. The locations are also summarized in Table 5.1 and shown on **Figure 2**.

**Table 5.1** Sediment Monitoring Stations

Location ID	Sampling Location	Coordinates	
		Easting	Northing
SA1	Northern KTAC, in the vicinity of Kai Tak Nullah (KTN)	838744.13	820311.91
SA2	Northern KTAC	838840.95	820030.07
SA3	Northern KTAC, in the vicinity of Jordan Valley Culvert (JVC) Outfall	839163.99	819942.90
SA4	Southern KTAC	839407.66	819537.90
SA5		839580.35	819512.47
SA6		839647.87	819329.45
SA7	KTTS	840122.60	819275.72
SA8		840270.71	819015.35
SA9		840479.55	818798.14
SA10	Kowloon Bay (between runway opening and TKWTS)	838694.90	819582.08
SA11	MTK waterfront, at the end of Ma Tau Kok Road	838138.20	820038.77
SA12	TKW waterfront, near Vehicle Examination Centre	837892.97	819704.84
SA13	Hoi Sham Park waterfront	837857.15	819436.94

### Monitoring Parameters and Frequency

- 5.2 Table 5.2 summarizes the monitoring parameters and frequencies of the sediment monitoring.

**Table 5.2 Sediment Monitoring Parameters and Frequency**

Monitoring Stations	Parameters, unit	Frequency
SA1		
SA2		
SA3		
SA4	<b>Laboratory Testing:</b> <ul style="list-style-type: none"><li>• Acid Volatile Sulphides (AVS), (mg/kg dry weight)</li><li>• Residual Nitrate, (mg NO<sub>3</sub>-N/L wet weight)</li><li>• Reduction – Oxidation (Redox) Potential, (mV)/pH</li></ul>	
SA5		
SA6		
SA7		
SA8		
SA9		
SA10		
SA11		
SA12		
SA13		

### Sampling Procedure

- 5.3 A hand held differential Global Positioning System (GPS) was used during the sediment monitoring to ensure the sampling and monitoring are at the correct location. The depth of water, in metres below the Principal datum (mPD), was measured.
- 5.4 At each designated monitoring station, the undisturbed surface sediment core samples were collected by manual or gravity pushing the corer into the sediment. Care was taken in collecting the core to prevent contact with air or excessive mixing of the sample. The core was at least 0.8m in length. Core recovery was at least 60% and the core was immediately sealed after collection to prevent leakage of odour and liquids. Care was taken in sealing the core in order to prevent any gas leakage and to minimize the amount of air inside the core.
- 5.5 The core was properly labeled with information such as sampling ID, sample length, diameter and depth as well as sampling date and time.

### Decontamination Procedures

- 5.6 Sampling equipment used during the course of the investigation programme was decontaminated by manual washing and fresh water rinsing after each sampling event. All disposable equipment was discarded after each use.

### Method of Sample Handling Storage and Transportation

- 5.7 The core samples were immediately stored, transported and maintained at 4°C or lower without being frozen in dark prior to any laboratory testing. All core samples were packed and transported in such a manner as to avoid shock, vibration or any other

disturbance of the samples. Core samples were delivered to Wellab Ltd. (HOKLAS Registration No.083) after collection on the same day. All samples were handled under chain of custody protocols, delivered to Wellab Ltd.

### **Details of Testing**

- 5.8 The collected sediment core samples with diameter of 100mm (from top to approximately 10cm in depth) were tested. The reporting limit, preparation method, determination method and the parameters to be tested are shown in Table 5.3.

**Table 5.3 Testing Parameters, Reporting Limit and Analytical Method**

Parameters, unit	Reporting Limit	Preparation Method USEPA Method	Determination Method USEPA Method
Acid Volatile Sulphides (mg/kg dry weight)	1	N/A	Draft Analytical Method for Determination of Acid Volatile Sulfide in Sediment. Office of Water Regulations and Standards (1991), (USEPA 821-R-91-100)
Redox (mV)	1	N/A	WTW pH/redox meter (or equivalent) calibrated to ISO9002 Standards
pH	0.1	N/A	
Residual Nitrate (mg NO <sub>3</sub> -N/L wet weight)	0.05	N/A	APHA 4500 NO <sub>3</sub> -E and 4500 NO <sub>2</sub> -B

### **QA/QC Requirements**

- 5.9 All laboratory tests will be conducted by laboratory accredited by Hong Kong Laboratory Accreditation Scheme (HOKLAS) - Wellab Ltd. (HOKLAS Registration No.083).
- 5.10 The following quality control programme was performed for laboratory testing:
- ✧ Method blank;
  - ✧ Duplicate (at 5% level i.e. one for every 20 samples); and
  - ✧ Matrix Spike (at 5% level i.e. one for every 20 samples).

Quality Controls	Acceptance Criteria
Method Blank	Less than method detection limit (MDL)
Duplicate	Confine within $\pm$ 25% of the mean of duplicated results
Matrix Spike	Confine within $\pm$ 25% of the recovery of spike concentration

## **Monitoring Equipment**

### **Water Depth Detector**

- 5.11 A portable, battery-operated echo sounder was used for the determination of water depth at each designated monitoring station.

### **Position System**

- 5.12 A hand held differential Global Positioning System (GPS) was used during sediment monitoring to ensure the monitoring vessel is at the correct location before taking measurements.
- 5.13 Table 5.4 summarizes the equipment used in the sediment monitoring program. Copies of the calibration/performance check records of the equipments used in the sediment monitoring and calibration certificates of mV Meter shown in **Appendix A3**. The equipment of flow injection analyzer and UV/Vis Spectrophotometer were checked/calibrated regularly every six months and three months regularly.

**Table 5.4 Equipment for Sediment Monitoring Program**

Equipment	Model and Make	Qty.
Monitoring Position Equipment	“Magellan” Handheld GPS Model GPS-320	1
Water Depth Detector	Fishfinder 140	1
mV Meter	TM39	1

### **Results and Observation**

- 5.14 The sediment monitoring schedule in the reporting period is provided in **Appendix B**.
- 5.15 The sediment monitoring was conducted on 30<sup>th</sup> August 2014.
- 5.16 The weather during the sampling was sunny.
- 5.17 No marine activities were conducted in the vicinity of the stations during the monitoring.
- 5.18 Sediment core sampling was unable to collect at SA1 as the nature of the seabed is sand / debris. Therefore, grab sampling at SA1 was conducted as agreed with RE.
- 5.19 The laboratory testing report of the collected sediment samples and QC report are provided in **Appendix C3** and **Appendix D2** respectively.
- 5.20 The sediment sampling data record sheet is provided in **Appendix E3**.

5.21 The depth of water at each of the sediment monitoring stations is shown in Table 5.5.

**Table 5.5 Water Depth at Sediment Monitoring Stations**

<b>Location ID</b>	<b>Sampling Location</b>	<b>Water Depth, mPD</b>
SA1	Northern KTAC, in the vicinity of Kai Tak Nullah (KTN)	1.8
SA2	Northern KTAC	3.0
SA3	Northern KTAC, in the vicinity of Jordan Valley Culvert (JVC) Outfall	3.3
SA4	Southern KTAC	5.2
SA5		5.3
SA6		5.0
SA7	KTTS	5.1
SA8		5.4
SA9		6.2
SA10	Kowloon Bay (between runway opening and TKWTS)	5.6
SA11	MTK waterfront, at the end of Ma Tau Kok Road	3.3
SA12	TKW waterfront, near Vehicle Examination Centre	5.7
SA13	Hoi Sham Park waterfront	3.2

## **6. Conclusion**

- 6.1 Environmental monitoring works for water quality, odour and sediment were performed in July and August 2014 and all monitoring results were checked and reviewed.
- 6.2 The next general water quality monitoring and odour patrol will be conducted in November 2014 and September 2014 respectively. The next sediment monitoring and odour sampling will be conducted in February 2015.


---


---

**FIGURES**

---

---

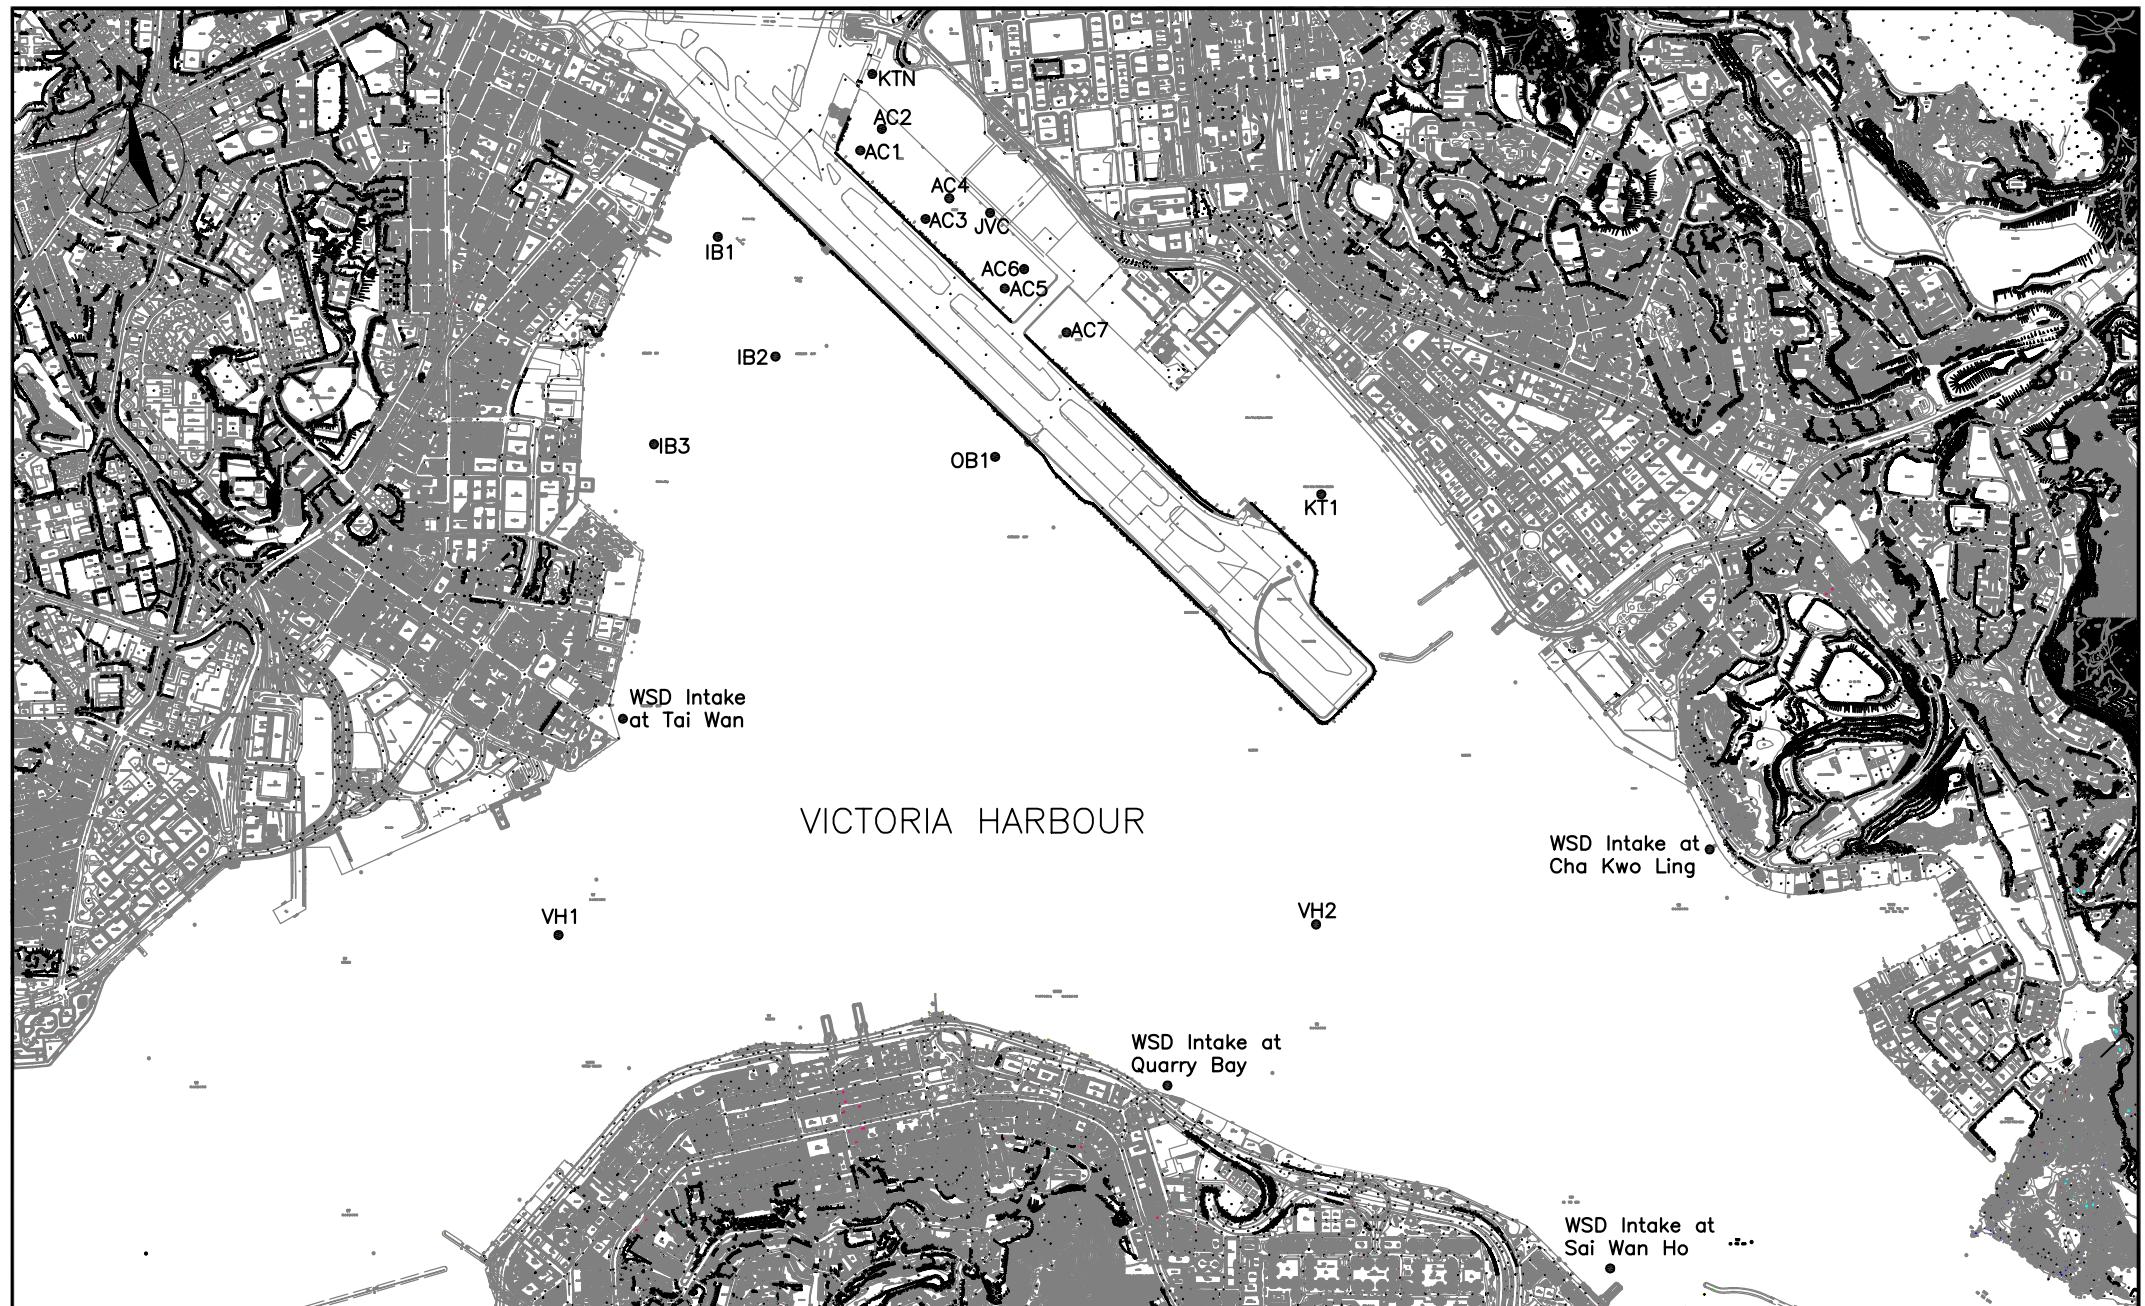


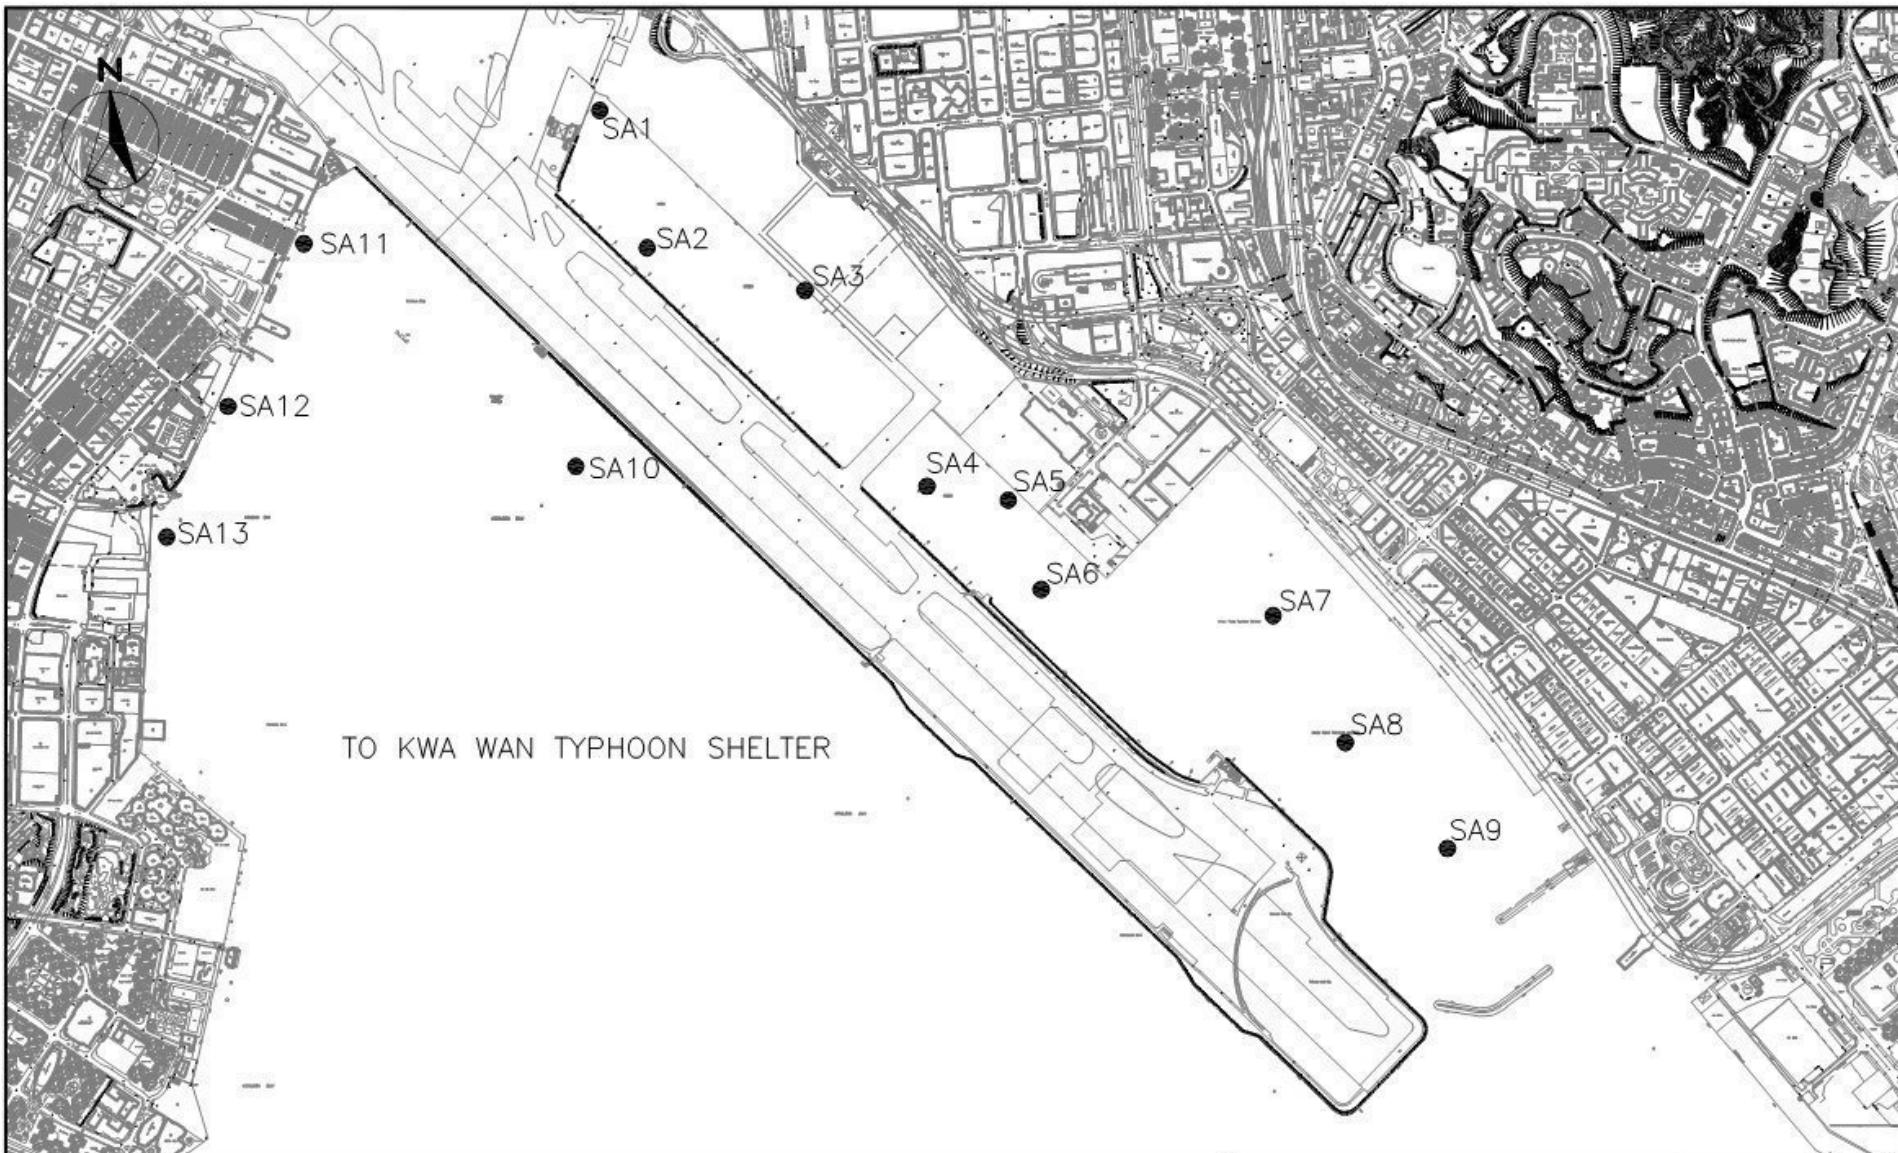

**CINOTECH**  
Cinotech Consultants Limited

Contract No. KL /2010/02  
Kai Tak Development – Kai Tak Approach Channel and Kwun Tong  
Typhoon Shelter Improvement Works (Phase 1)  
Location of Odour Sampling and Sediment Monitoring Stations

SCALE	N.T.S.	DATE	AUG 2011
CHECK	IT	DRAWN	TW
JOB NO.	FIGURE NO. FIG 2 REV -		
	MA11017		

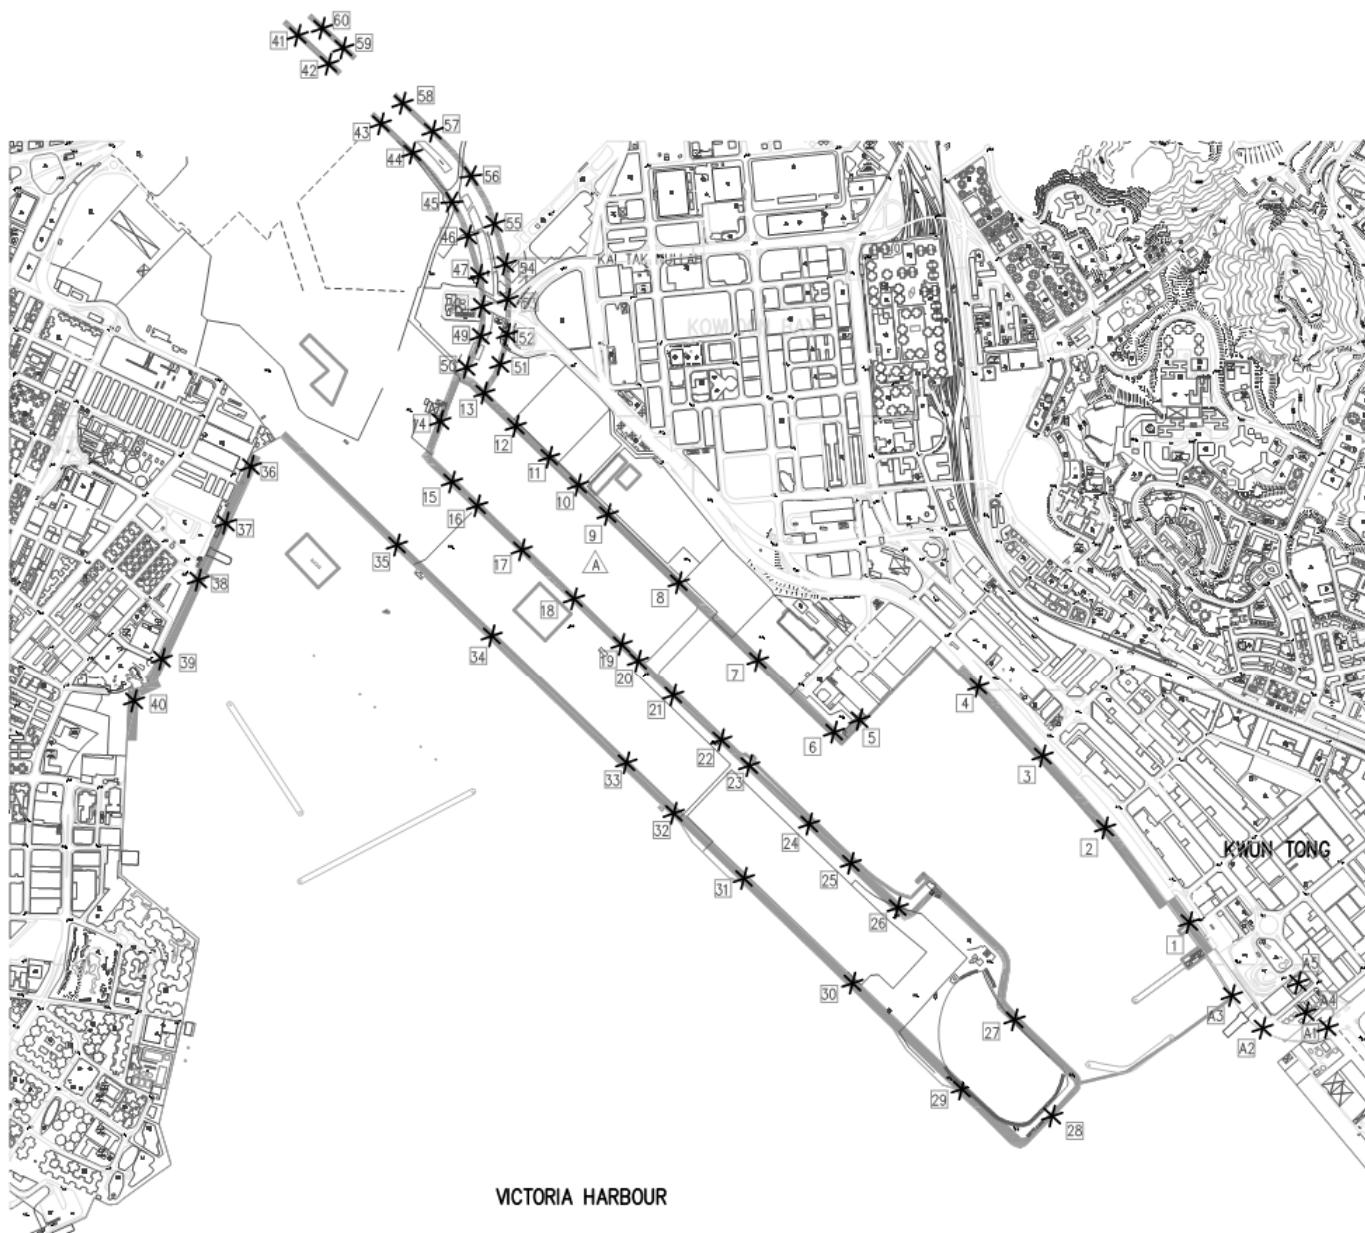

VICTORIA HARBOUR

Contract No. KL/2010/02 Kai Tak Development-Kai Tak Approach Channel (KTAC) and Kwun Tong Typhoon Shelter (Phase 1)	Scale N.T.S	Project No. MA11017	<b>CINOTECH</b>
Proposed Odour Patrol Route and Sniffing Locations	Date Nov-13	Figure 3	

---

---

**APPENDIX A1**  
**COPIES OF CALIBRATION**  
**CERTIFICATES FOR WATER**  
**QUALITY MONITORING**

---

---

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong

Test Report No.:	C/W/140802-1
Date of Issue:	2014-08-02
Date Received:	2014-08-02
Date Tested:	2014-08-02
Date Completed:	2014-08-02
Next Due Date:	2014-11-01

**ATTN:** Mr. W.K. Tang

Page: 1 of 2

### Certificate of Calibration

#### Item for calibration:

Description	: Sonde Environmental Monitoring System
Manufacturer	: YSI
Model No.	: 6820-C-M
Serial No.	: 02D0126AA
Equipment No.	: W.03.01

#### Test conditions:

Room Temperature	: 21 degree Celsius
Relative Humidity	: 64%

#### Test Specifications:

- Conductivity & Salinity Sensor, Model: 6560, L/N: 11J100025
- 1. Conductivity performance check with Potassium Chloride standard solution
- 2. Salinity performance check with Sodium Chloride standard solution
- Dissolved Oxygen Sensor, Model: 6562, L/N: 07E100029
- 1. Performance check against Winkler titration
- Turbidity Sensor, Model: 6136, S/N: 12B100900
- 1. Calibration check with Formazin standard solution
- pH Meter, Model: 6561, L/N: 11H
- 1. Calibration check with standard pH buffer
- Depth Meter
- 1. Calibration check at 1m water level depth

#### Methodologies:

- 1. YSI 6-Series Sonde Environmental Monitoring System Instruction Manual
- 2. In-house method with reference to APHA and ISO standards
  - Conductivity (APHA 20ed 2510), Salinity (APHA 20ed 2520B)
  - Dissolved Oxygen (APHA 20cd 4500-O C), Turbidity (APIA 19ed 2130 B),
  - pH (APHA 19th 4500-H+ B)

#### PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**

  
**PATRICK TSE**  
*Laboratory Manager*

## TEST REPORT

Test Report No.:	C/W/140802-1
Date of Issue:	2014-08-02
Date Received:	2014-08-02
Date Tested:	2014-08-02
Date Completed:	2014-08-02
Next Due Date:	2014-11-01

Page: 2 of 2

### Results:

#### 1. Conductivity performance check

Specific Conductivity, $\mu\text{S}/\text{cm}$		Correction, $\mu\text{S}/\text{cm}$	Acceptable range
Salinity Meter (C1)	Theoretical Value (C2)	D = C1 - C2	
1420	1420	0	1420 $\pm$ 20

#### 2. Salinity Performance check

Salinity, ppt		Correction, ppt	Acceptable range
Instrument Reading	Theoretical Value		
30.0	30.0	0.0	30.0 $\pm$ 3

#### 3. Dissolved Oxygen check

Oxygen level in water at 20°C	Dissolved Oxygen, mg O <sub>2</sub> /L		Correction, mg O <sub>2</sub> /L	Acceptable range
	D.O. Meter	Winkler Titration		
Saturated	9.1	9.1	0.0	$\pm$ 0.2
Half-saturated	5.6	5.6	0.0	$\pm$ 0.2
Zero	0.0	0.0	0.0	$\pm$ 0.2

#### 4. Turbidity check

Turbidity value in solution, NTU	Calibration Value, NTU	Correction, NTU	Acceptable range
0.00	0.00	0.00	0.00 $\pm$ 0.05
100	100	0	100 $\pm$ 5
1000	1000	0	1000 $\pm$ 100

#### 5. pH Meter check

Test Parameters	Performance characteristic	Acceptable range
Liquid junction error $\Delta\text{pH}_j$ , pH unit	0.01	Less than 0.05
Shift on stirring $\Delta\text{pH}_s$ , pH unit	0.01	Less than 0.02
Noise $\Delta\text{pH}_n$ , pH unit	0.00	Less than 0.02

#### 6. Depth Meter check

Instrument Reading, m	Calibration Value, m	Correction, m	Acceptable range
1.0	1.00	0.00	1.00 $\pm$ 0.05

\*\*\*\*\*END OF REPORT\*\*\*\*\*

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong

Test Report No.:	C/W/140802-2
Date of Issue:	2014-08-02
Date Received:	2014-08-02
Date Tested:	2014-08-02
Date Completed:	2014-08-02
Next Due Date:	2014-11-01

**ATTN:** Mr. W.K. Tang

Page: 1 of 2

### Certificate of Calibration

#### Item for calibration:

Description	: Sonde Environmental Monitoring System
Manufacturer	: YSI
Model No.	: 6920-M
Serial No.	: 03H1764AA
Equipment No.	: W.03.03

#### Test conditions:

Room Temperature	: 21 degree Celsius
Relative Humidity	: 64%

#### Test Specifications:

- Conductivity & Salinity Sensor, Model: 6560, L/N: 03H1461
- 1. Conductivity performance check with Potassium Chloride standard solution
- 2. Salinity performance check with Sodium Chloride standard solution
- Dissolved Oxygen Sensor, Model: 6562, L/N: 08C100610
- 1. Performance check against Winkler titration
- Turbidity Sensor, Model: 6136, S/N: 09M100672
- 1. Calibration check with Formazin standard solution
- pH Meter, Model: 6561, L/N: 07E
- 1. Calibration check with standard pH buffer
- Depth Meter
- 1. Calibration check at 1m water level depth

#### Methodologies:

- 1. YSI 6-Series Sonde Environmental Monitoring System Instruction Manual
- 2. In-house method with reference to APHA and ISO standards
- Conductivity (APHA 20ed 2510), Salinity (APHA 20ed 2520B)
- Dissolved Oxygen (APHA 20ed 4500-O C), Turbidity (APHA 19ed 2130 B),
- pH (APHA 19th 4500-H+ B)

#### PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**

  
**PATRICK TSE**  
*Laboratory Manager*

## TEST REPORT

Test Report No.:	C/W/140802-2
Date of Issue:	2014-08-02
Date Received:	2014-08-02
Date Tested:	2014-08-02
Date Completed:	2014-08-02
Next Due Date:	2014-11-01

Page: 2 of 2

### Results:

#### 1. Conductivity performance check

Specific Conductivity, $\mu\text{S}/\text{cm}$		Correction, $\mu\text{S}/\text{cm}$	Acceptable range
Salinity Meter (C1)	Theoretical Value (C2)	$D = C1 - C2$	
1420	1420	0	$1420 \pm 20$

#### 2. Salinity Performance check

Salinity, ppt		Correction, ppt	Acceptable range
Instrument Reading	Theoretical Value		
30.0	30.0	0.0	$30.0 \pm 3$

#### 3. Dissolved Oxygen check

Oxygen level in water at 20°C	Dissolved Oxygen, mg O <sub>2</sub> /L		Correction, mg O <sub>2</sub> /L	Acceptable range
	D.O. Meter	Winkler Titration		
Saturated	9.1	9.1	0.0	$\pm 0.2$
Half-saturated	5.6	5.6	0.0	$\pm 0.2$
Zero	0.0	0.0	0.0	$\pm 0.2$

#### 4. Turbidity check

Turbidity value in solution, NTU	Calibration Value, NTU	Correction, NTU	Acceptable range
0.00	0.00	0.00	$0.00 \pm 0.05$
100	100	0	$100 \pm 5$
1000	1000	0	$1000 \pm 100$

#### 5. pH Meter check

Test Parameters	Performance characteristic	Acceptable range
Liquid junction error $\Delta\text{pH}_i$ , pH unit	0.01	Less than 0.05
Shift on stirring $\Delta\text{pH}_s$ , pH unit	0.01	Less than 0.02
Noise $\Delta\text{pH}_n$ , pH unit	0.00	Less than 0.02

#### 6. Depth Meter check

Instrument Reading, m	Calibration Value, m	Correction, m	Acceptable range
1.0	1.00	0.00	$1.00 \pm 0.05$

\*\*\*\*\*END OF REPORT\*\*\*\*\*

---

---

**APPENDIX A2**  
**COPIES OF CALIBRATION**  
**CERTIFICATES FOR ODOUR**  
**SAMPLING**

---

---

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong

Test Report No.:	C/W/140802-1
Date of Issue:	2014-08-02
Date Received:	2014-08-02
Date Tested:	2014-08-02
Date Completed:	2014-08-02
Next Due Date:	2014-11-01

**ATTN:** Mr. W.K. Tang

Page: 1 of 2

### Certificate of Calibration

#### Item for calibration:

Description	: Sonde Environmental Monitoring System
Manufacturer	: YSI
Model No.	: 6820-C-M
Serial No.	: 02D0126AA
Equipment No.	: W.03.01

#### Test conditions:

Room Temperature	: 21 degree Celsius
Relative Humidity	: 64%

#### Test Specifications:

- Conductivity & Salinity Sensor, Model: 6560, L/N: 11J100025
- 1. Conductivity performance check with Potassium Chloride standard solution
- 2. Salinity performance check with Sodium Chloride standard solution
- Dissolved Oxygen Sensor, Model: 6562, L/N: 07E100029
- 1. Performance check against Winkler titration
- Turbidity Sensor, Model: 6136, S/N: 12B100900
- 1. Calibration check with Formazin standard solution
- pH Meter, Model: 6561, L/N: 11H
- 1. Calibration check with standard pH buffer
- Depth Meter
- 1. Calibration check at 1m water level depth

#### Methodologies:

- 1. YSI 6-Series Sonde Environmental Monitoring System Instruction Manual
- 2. In-house method with reference to APHA and ISO standards
  - Conductivity (APHA 20ed 2510), Salinity (APHA 20ed 2520B)
  - Dissolved Oxygen (APHA 20cd 4500-O C), Turbidity (APIA 19ed 2130 B),
  - pH (APHA 19th 4500-H+ B)

#### PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**

  
**PATRICK TSE**  
*Laboratory Manager*

## TEST REPORT

Test Report No.:	C/W/140802-1
Date of Issue:	2014-08-02
Date Received:	2014-08-02
Date Tested:	2014-08-02
Date Completed:	2014-08-02
Next Due Date:	2014-11-01

Page: 2 of 2

### Results:

#### 1. Conductivity performance check

Specific Conductivity, $\mu\text{S}/\text{cm}$		Correction, $\mu\text{S}/\text{cm}$	Acceptable range
Salinity Meter (C1)	Theoretical Value (C2)	D = C1 - C2	
1420	1420	0	1420 $\pm$ 20

#### 2. Salinity Performance check

Salinity, ppt		Correction, ppt	Acceptable range
Instrument Reading	Theoretical Value		
30.0	30.0	0.0	30.0 $\pm$ 3

#### 3. Dissolved Oxygen check

Oxygen level in water at 20°C	Dissolved Oxygen, mg O <sub>2</sub> /L		Correction, mg O <sub>2</sub> /L	Acceptable range
	D.O. Meter	Winkler Titration		
Saturated	9.1	9.1	0.0	$\pm$ 0.2
Half-saturated	5.6	5.6	0.0	$\pm$ 0.2
Zero	0.0	0.0	0.0	$\pm$ 0.2

#### 4. Turbidity check

Turbidity value in solution, NTU	Calibration Value, NTU	Correction, NTU	Acceptable range
0.00	0.00	0.00	0.00 $\pm$ 0.05
100	100	0	100 $\pm$ 5
1000	1000	0	1000 $\pm$ 100

#### 5. pH Meter check

Test Parameters	Performance characteristic	Acceptable range
Liquid junction error $\Delta\text{pH}_j$ , pH unit	0.01	Less than 0.05
Shift on stirring $\Delta\text{pH}_s$ , pH unit	0.01	Less than 0.02
Noise $\Delta\text{pH}_n$ , pH unit	0.00	Less than 0.02

#### 6. Depth Meter check

Instrument Reading, m	Calibration Value, m	Correction, m	Acceptable range
1.0	1.00	0.00	1.00 $\pm$ 0.05

\*\*\*\*\*END OF REPORT\*\*\*\*\*

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
 Room 1710, Technology Park,  
 18 On Lai Street,  
 Shatin, NT, Hong Kong

Test Report No.:	CA/140503
Date of Issue:	2014-05-04
Date Received:	2014-05-03
Date Tested:	2014-05-03
Date Completed:	2014-05-04
Next Due Date:	2015-05-03

**ATTN:** Mr. W.K. Tang

Page: 1 of 1

### Certificate of Calibration

**Item for calibration:**

Description	:	Thermo Anemometer
Manufacturer	:	Prova Instruments Inc.
Model No.	:	AVM-01
Serial No.	:	10330172
Equipment No.	:	A-03-06

**Test conditions:**

Room Temperature	:	22 degree Celsius
Relative Humidity	:	68%
Pressure	:	101.0 kPa

**Methodology:**


The anemometer has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

**Results:**

	Reference Set Point	Instrument Readings
Measuring Air Velocity, m/s	2.0	2.0
Temperature, °C	21.0	21.1

*Prepared and Checked By:*

For and On Behalf of **WELLAB Ltd.**

  
**PATRICK TSE**  
*Laboratory Manager*

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
 Room 1710, Technology Park,  
 18 On Lai Street,  
 Shatin, NT, Hong Kong

**ATTN:** Mr. W.K. Tang

Test Report No.:	C/W/140808-1
Date of Issue:	2014-08-08
Date Received:	2014-08-08
Date Tested:	2014-08-08
Date Completed:	2014-08-08
Next Due Date:	2014-11-07

Page: 1 of 1

### Certificate of Calibration

**Item for calibration:**

Description	: Portable pH/Temp/Redox TM39 Meter with Redox (ORP) combination electrode for TM39
Model No.	: TM39
Serial No.	: 020139
Equipment No.	: W.06.01, W.06.02

**Test conditions:**

Room Temperature	: 23 degree Celsius
Relative Humidity	: 60%

**Test Specifications & Methodology:**

pH (ISO 10523, Section 9.1 and APHA 19ed 4500-H<sup>+</sup> B)

1. Calibration check with standard pH buffer
- Redox electrode (APHA 20ed 2580)
1. Redox performance check with ZoBell's standard solution

\*\*\*\*\*

**Results:**

1. pH Meter check

Test Parameters	Performance characteristic	Acceptable range
Liquid junction error $\Delta p\text{H}_j$ , pH unit	0.01	Less than 0.05
Shift on stirring $\Delta p\text{H}_s$ , pH unit	0.01	Less than 0.02
Noise $\Delta p\text{H}_n$ , pH unit	0.00	Less than 0.02

2. Redox Meter check

Instrument Reading	Theoretical Value	Acceptable range
228	229	229±10

\*\*\*\*\*

**PREPARED AND CHECKED BY:**

For and On Behalf of **WELLAB Ltd.**

  
**PATRICK TSE**  
*Laboratory Manager*

Result of calibration on olfactometer (Date: 18 November 2013)

Setting	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
	dilution factor														
data	21030.5	11243.23	6878.212	3186.093	1882.924	999.3983	497.5728	227.4895	142.4234	81.76895	42.67504	16.72813	10.16779	6.424703	4.913008
	19488.27	12505.84	6720.092	3168.824	1889.008	1008.014	497.5728	229.2737	142.7712	81.76895	42.51985	16.75209	10.16779	6.424703	4.933738
	20658.94	11919.43	6758.936	3239.047	1901.294	999.3983	499.6992	229.7242	142.4234	81.76895	42.21285	16.75209	10.16779	6.424703	4.913008
	20335.58	11463.69	6798.233	3186.093	1895.131	999.3983	501.8438	230.6304	142.7712	81.76895	42.51985	16.70423	10.16779	6.424703	4.933738
	20586.2	11943.78	6837.988	3186.093	1898.208	1008.014	501.8438	230.1764	141.7328	81.76895	42.51985	16.75209	10.16779	6.460199	4.892452
	18951.31	12218.35	6532.38	3186.093	1910.614	1008.014	504.0069	230.1764	143.2961	81.20111	42.67504	16.72813	10.16779	6.424703	4.933738
	19919.86	12079.5	6720.092	3221.201	1910.614	1008.014	501.8438	228.8251	142.5971	81.76895	42.67504	16.75209	10.16779	6.424703	4.913008
	19885.99	12129.63	6532.38	3212.352	1910.614	999.3983	501.8438	230.1764	143.1207	81.76895	42.51985	16.72813	10.16779	6.424703	4.954644
	19919.86	11907.29	6758.936	3203.551	1929.531	1016.779	499.6992	230.6304	143.4719	81.76895	42.67504	16.75209	10.16779	6.424703	4.913008
	20880.29	11895.18	6837.988	3221.201	1910.614	1008.014	501.8438	229.7242	143.2961	81.76895	42.67504	16.75209	10.16779	6.424703	4.831802
	20732.2	11907.29	6798.233	3109.83	1901.294	999.3983	504.0069	228.3781	142.0773	81.76895	42.67504	16.72813	10.16779	6.460199	4.933738
	21030.5	12295.44	6960.095	3177.435	1916.879	1016.779	499.6992	229.7242	142.2501	81.76895	42.67504	16.75209	10.16779	6.424703	4.933738
	19391.31	12695.94	6878.212	3221.201	1898.208	1008.014	504.0069	229.2737	143.2961	81.76895	42.67504	16.75209	10.16779	6.460199	4.933738
	22229.96	11463.69	6643.727	3168.824	1929.531	999.3983	504.0069	230.6304	143.8248	81.76895	42.83136	16.72813	10.16779	6.424703	4.954644
	19520.8	11577.19	6878.212	3160.259	1929.531	1008.014	501.8438	230.6304	142.9457	81.76895	42.67504	16.75209	10.16779	6.424703	4.913008
	21534	11463.69	7043.952	3221.201	1926.353	1008.014	501.8438	230.1764	143.2961	81.76895	42.67504	16.75209	10.16779	6.424703	4.933738
	20992.75	12492.48	6720.092	3177.435	1873.872	1008.014	506.1887	231.0862	143.2961	81.76895	42.67504	16.75209	10.16779	6.424703	4.933738
Average Standard Deviation (STDEV)	20416.96	11953.04	6782.221	3190.984	1906.719	1006.004	501.7274	229.8074	142.8759	81.73555	42.62053	16.74223	10.16779	6.430967	4.921676
Coefficient of Variation (%)	4.182752	3.471874	1.989145	0.977027	0.870453	0.572309	0.466486	0.405001	0.393151	0.168496	0.312523	0.088448	1.8E-14	0.216889	0.571195
Setting	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
Final Dilution Factor	20417	11953	6782.2	3191	1906.7	1006	501.7	229.8	142.9	81.7	42.6	16.7	10.2	6.4	4.9

---

---

**APPENDIX A3**  
**COPIES OF CALIBRATION**  
**CERTIFICATES FOR SEDIMENT**  
**MONITORING**

---

---

# Calibration Record

WELLAB

Analyst : Yanki  
Checked By : MAP 6-8-2014

Date Analysed

Date Checked

: 7-8-2014.

: 07/08/2014

## Performance Check of UV/Vis Spectrophotometer (CMP020)

Equipment No. : F449

### Record:

#### Wavelength check

CRM used: SIN 5788

SRM Band No.	Certified Wavelength, nm	Instrument Reading, nm	Derivation, nm
1	241.12	241.00	+0.12
2	249.89	249.70	+0.19
3	278.13	277.80	+0.33
4	287.22	287.00	+0.22
5	333.48	333.25	+0.23
6	345.38	345.25	+0.13
7	361.25	361.05	+0.20
8	385.61	385.45	+0.16
9	416.25	416.15	+0.10
10	451.45	451.15	+0.30
11	467.82	467.65	+0.17
12	485.23	485.05	+0.18
13	536.56	536.45	+0.11
14	640.50	640.50	+0.00

Criteria: Derivation of  $\lambda_{\text{max}}$  for Holmium Oxide solution should be less than  $\pm 1 \text{ nm}$

#### Linearity check

Analytical wavelength: 512 nm

Concentration of cobalt chloride solution, N	Absorbance
0.0000	0.0000
0.0050	0.0452
0.0100	0.0911
0.0500	0.4450
0.1000	0.8950
0.2000	1.8291

Regression coefficient: 0.99993

Note : Regression coefficient of calibration curve should be at least 0.9999.

**Calibration Record****WELLAB**

Analyst : Spah Date Analysed : 7-8-2014  
 Checked By Self mark off with 7/2014 Date Checked : 67/08/2014

**Stray radiation**

Spectral Range, nm	Test Wavelength, nm	Liquid	Stray radiation, %
210 - 259	220	10g/L aqueous NaI or KI	0.00
250 - 320	285	Acetone	0.00
300 - 385	350	50g/L aqueous NaNO <sub>2</sub>	0.00

Criteria: less than 1%

**Absorbance accuracy**

Wavelength, nm	Expected Absorbance	Measured Absorbance
235	0.747	0.7446
257	0.864	0.8661
313	0.292	0.2900
350	0.640	0.6432

Criteria:  $\pm 0.01$  Abs**Zero absorbance line flatness**Maximum value - minimum value = 0.0019 - -0.0003 = 0.0022 (D)

Criteria: D should be less than 0.01 Abs

**Wavelength and Absorbance (Visible region) check**

Wavelength, nm	Expected Absorbance	Measured Absorbance
600	0.068	0.0684
650	0.224	0.2278
700	0.527	0.5238
750	0.817	0.816

Criteria:  $\pm 2\%$  of expected absorbanceStatus of instrument: Pass

**Calibration/ Performance Check Requested:** Flow Injection Analyzer (FIA)  
**Method Used:** CMP 022

**I. Pump**Equipment No.: E222Timer used: E407Time the pump takes to make 10 revolutions: 50 seconds (Pass/ Fail)Acceptance Criteria:  $50 \pm 1$  second for 10 revolutions**II. Heating modules**Equipment No.: E223Thermocouple used: E250 Ch. 1

Channel No.	Set Temp °C	Measured Temp, °C	Corrected Temp, °C	Difference mm	Pass/Fail
1	60	59.4	59.6	+0.4	PASS
2	37	36.9	36.8	-0.1	PASS
3	60	59.5	59.7	+0.2	PASS

Acceptance Criteria:  $\pm 2$  °C for the set temperatureAnalyst: MANDate: 22/07/2014Checked by: JKTDate: 22/7/2014

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
 Room 1710, Technology Park,  
 18 On Lai Street,  
 Shatin, NT, Hong Kong

Test Report No.:	C/W/140808-1
Date of Issue:	2014-08-08
Date Received:	2014-08-08
Date Tested:	2014-08-08
Date Completed:	2014-08-08
Next Due Date:	2014-11-07

**ATTN:** Mr. W.K. Tang

Page: 1 of 1

### Certificate of Calibration

**Item for calibration:**

Description	: Portable pH/Temp/Redox TM39 Meter with Redox (ORP) combination electrode for TM39
Model No.	: TM39
Serial No.	: 020139
Equipment No.	: W.06.01, W.06.02

**Test conditions:**

Room Temperature	: 23 degree Celsius
Relative Humidity	: 60%

**Test Specifications & Methodology:**

pH (ISO 10523, Section 9.1 and APHA 19ed 4500-H<sup>+</sup> B)

1. Calibration check with standard pH buffer
- Redox electrode (APHA 20ed 2580)
1. Redox performance check with ZoBell's standard solution

\*\*\*\*\*

**Results:**

1. pH Meter check

Test Parameters	Performance characteristic	Acceptable range
Liquid junction error $\Delta p\text{H}_j$ , pH unit	0.01	Less than 0.05
Shift on stirring $\Delta p\text{H}_s$ , pH unit	0.01	Less than 0.02
Noise $\Delta p\text{H}_n$ , pH unit	0.00	Less than 0.02

2. Redox Meter check

Instrument Reading	Theoretical Value	Acceptable range
228	229	229±10

\*\*\*\*\*

**PREPARED AND CHECKED BY:**

For and On Behalf of **WELLAB Ltd.**

  
**PATRICK TSE**  
*Laboratory Manager*

---

---

**APPENDIX A4**  
**COPIES OF CALIBRATION**  
**CERTIFICATES FOR ODOUR**  
**PATROL**

---

---

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
 Room 1710, Technology Park,  
 18 On Lai Street,  
 Shatin, NT, Hong Kong

Test Report No.:	CA/140503
Date of Issue:	2014-05-04
Date Received:	2014-05-03
Date Tested:	2014-05-03
Date Completed:	2014-05-04
Next Due Date:	2015-05-03

**ATTN:** Mr. W.K. Tang

Page: 1 of 1

### Certificate of Calibration

**Item for calibration:**

Description	:	Thermo Anemometer
Manufacturer	:	Prova Instruments Inc.
Model No.	:	AVM-01
Serial No.	:	10330172
Equipment No.	:	A-03-06

**Test conditions:**

Room Temperature	:	22 degree Celsius
Relative Humidity	:	68%
Pressure	:	101.0 kPa

**Methodology:**

The anemometer has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

**Results:**

	Reference Set Point	Instrument Readings
Measuring Air Velocity, m/s	2.0	2.0
Temperature, °C	21.0	21.1

*Prepared and Checked By:*

For and On Behalf of **WELLAB Ltd.**

**PATRICK TSE**  
*Laboratory Manager*

---

---

**APPENDIX A5**  
**CERTIFICATE FOR QUALIFIED**  
**ODOUR PANEL MEMBER**

---

---

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Laboratory No.:	20459
Date of Issue:	2014-04-16
Date Tested:	2014-04-11
Date Completed:	2014-04-16

**ATTN:** Ms Ivy Tam

**Page:** 1 of 1

### Certificate of Qualified Odour Panel Member

Mr. Tang Wing-Kwai

#### Test Requested & Methodology:

An odour screening test was conducted for odour panel applicants at Wellab Ltd. to determine the thresholds of odour panel candidate according to the requirement of European Standard Method (EN13725). Standard n-butanol gas with a certified concentration of 50 ppm/v was applied as reference material and the n-butanol thresholds in the range of 20 to 80 ppb/v was determined by the olfactometry measurements on three separate sessions on 11<sup>th</sup>, 14<sup>th</sup> and 16<sup>th</sup> April 2014, respectively.

#### Results:

Standard deviation of n-butanol thresholds in the range of 20 to 80 ppb/v, R	Requirement of EN13725	Comment
1.41	<2.3	Pass

#### Certification:

This is to certify that Mr. Tang Wing-Kwai participated in a set of n-butanol screening tests in our laboratory in April 2014 and the odour threshold of n-butanol in nitrogen gas was found to be in the range of 20 – 80 ppb/v with a standard deviation of R is 1.41. According to the requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725), he is qualified to participate in olfactometry analysis to determine odour concentration for a valid period of six months until 16<sup>th</sup> October 2014.

\*\*\*\*\*END OF REPORT\*\*\*\*\*

*R. Tse*  
**PATRICK TSE**  
Laboratory Manager

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Laboratory No.:	20459A
Date of Issue:	2014-04-16
Date Tested:	2014-04-11
Date Completed:	2014-04-16

**ATTN:** Ms Ivy Tam

**Page:** 1 of 1

### Certificate of Qualified Odour Panel Member

Mr. Lee Man-Hei

#### Test Requested & Methodology:

An odour screening test was conducted for odour panel applicants at Wellab Ltd. to determine the thresholds of odour panel candidate according to the requirement of European Standard Method (EN13725). Standard n-butanol gas with a certified concentration of 50 ppm/v was applied as reference material and the n-butanol thresholds in the range of 20 to 80 ppb/v was determined by the olfactometry measurements on three separate sessions on 11<sup>th</sup>, 14<sup>th</sup> and 16<sup>th</sup> April 2014, respectively.

#### Results:

Standard deviation of n-butanol thresholds in the range of 20 to 80 ppb/v, R	Requirement of EN13725	Comment
1.33	<2.3	Pass

#### Certification:

This is to certify that Mr. Lee Man-Hei participated in a set of n-butanol screening tests in our laboratory in April 2014 and the odour threshold of n-butanol in nitrogen gas was found to be in the range of 20 – 80 ppb/v with a standard deviation of R is 1.33. According to the requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725), he is qualified to participate in olfactometry analysis to determine odour concentration for a valid period of six months until 16<sup>th</sup> October 2014.

\*\*\*\*\*END OF REPORT\*\*\*\*\*

*R. Tse*  
PREPARED AND CHECKED BY:  
For and On Behalf of WELLAB Ltd.

*R. Tse*  
PATRICK TSE  
Laboratory Manager

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Laboratory No.:	20542
Date of Issue:	2014-07-16
Date Tested:	2014-07-11
Date Completed:	2014-07-16

**ATTN:** Ms Ivy Tam

**Page:** 1 of 1

### Certificate of Qualified Odour Panel Member

**Mr. Tang Wing-Kwai**

#### Test Requested & Methodology:

An odour screening test was conducted for odour panel applicants at Wellab Ltd. to determine the thresholds of odour panel candidate according to the requirement of European Standard Method (EN13725). Standard n-butanol gas with a certified concentration of 50 ppm/v was applied as reference material and the n-butanol thresholds in the range of 20 to 80 ppb/v was determined by the olfactometry measurements on three separate sessions on 11<sup>th</sup>, 14<sup>th</sup> and 16<sup>th</sup> July 2014, respectively.

#### Results:

Standard deviation of n-butanol thresholds in the range of 20 to 80 ppb/v, R	Requirement of EN13725	Comment
1.34	<2.3	Pass

#### Certification:

This is to certify that **Mr. Tang Wing-Kwai** participated in a set of n-butanol screening tests in our laboratory in July 2014 and the odour threshold of n-butanol in nitrogen gas was found to be in the range of 20 – 80 ppb/v with a standard deviation of R is 1.34. According to the requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725), he is qualified to participate in olfactometry analysis to determine odour concentration for a valid period of six months until 16<sup>th</sup> January 2015.

\*\*\*\*\*END OF REPORT\*\*\*\*\*

*Patrick Tse*  
**PATRICK TSE**  
Laboratory Manager

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Laboratory No.:	20542A
Date of Issue:	2014-07-16
Date Tested:	2014-07-11
Date Completed:	2014-07-16

**ATTN:** Ms Ivy Tam

**Page:** 1 of 1

### Certificate of Qualified Odour Panel Member

Mr. Lee Man-Hei

#### Test Requested & Methodology:

An odour screening test was conducted for odour panel applicants at Wellab Ltd. to determine the thresholds of odour panel candidate according to the requirement of European Standard Method (EN13725). Standard n-butanol gas with a certified concentration of 50 ppm/v was applied as reference material and the n-butanol thresholds in the range of 20 to 80 ppb/v was determined by the olfactometry measurements on three separate sessions on 11<sup>th</sup>, 14<sup>th</sup> and 16<sup>th</sup> July 2014, respectively.

#### Results:


Standard deviation of n-butanol thresholds in the range of 20 to 80 ppb/v, R	Requirement of EN13725	Comment
1.26	<2.3	Pass

#### Certification:

This is to certify that Mr. Lee Man-Hei participated in a set of n-butanol screening tests in our laboratory in July 2014 and the odour threshold of n-butanol in nitrogen gas was found to be in the range of 20 – 80 ppb/v with a standard deviation of R is 1.26. According to the requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725), he is qualified to participate in olfactometry analysis to determine odour concentration for a valid period of six months until 16<sup>th</sup> January 2015.

\*\*\*\*\*END OF REPORT\*\*\*\*\*

*Prepared and Checked By:*  
For and On Behalf of **WELLAB Ltd.**

  
**PATRICK TSE**  
Laboratory Manager

---

---

**APPENDIX B**  
**ENVIRONMENTAL MONITORING**  
**SCHEDULE**

---

---

**Contract No. KL/2010/02 Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)**  
**Odour Patrol Schedule for July 2014**

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
		1-Jul	2-Jul	3-Jul	4-Jul	5-Jul
6-Jul	7-Jul	8-Jul	9-Jul	10-Jul	11-Jul	12-Jul
13-Jul	14-Jul	15-Jul	16-Jul	17-Jul	18-Jul	19-Jul
	Odour Patrol Daytime - High Tide Evening/Night Time - Low Tide	Odour Patrol Daytime - High Tide Evening/Night Time - Low Tide				
20-Jul	21-Jul	22-Jul	23-Jul	24-Jul	25-Jul	26-Jul
				Odour Patrol Daytime - High Tide		
27-Jul	28-Jul	29-Jul	30-Jul	31-Jul		

Remark: Reference was made to the tidal information of Hong Kong Observatory

**Contract No. KL/2010/02 Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)**  
**Odour, Sediment and Water Quality Monitoring Schedule for August 2014**

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
					1-Aug	2-Aug
3-Aug	4-Aug	5-Aug	6-Aug	7-Aug	8-Aug	9-Aug
10-Aug	11-Aug	12-Aug	13-Aug	14-Aug	15-Aug	16-Aug
		Odour Patrol Daytime - High Tide				
17-Aug	18-Aug	19-Aug	20-Aug	21-Aug	22-Aug	23-Aug
	<u>Water Quality Monitoring (13th)</u>  Mid-Flood                    13:19 Mid-Ebb                    18:24				Odour Sampling (7th) Low Tide                    14:14  <u>Odour Patrol</u> Daytime - High Tide	
24-Aug	25-Aug	26-Aug	27-Aug	28-Aug	29-Aug	30-Aug
	<u>Odour Patrol</u>  Evening/Night Time - Low Tide	<u>Odour Patrol</u>  Evening/Night Time - Low Tide	<u>Odour Patrol</u> Daytime - High Tide			Sediment Monitoring (7th)
31-Aug						

Remark: Reference was made to the tidal information of Hong Kong Observatory

---

---

**APPENDIX C1**  
**LABORATORY TESTING REPORT**  
**FOR WATER QUALITY**  
**MONITORING**

---

---

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

**ATTN:** Miss Mei Ling Tang

Page: 1 of 29

**Sample Description** : 168 liquid samples as received by customer said to be water

Project No. : MA11017

Project Name : Contract No. KL/2010/02 Kai Tak Development – Kai Tak Approach Channel  
& Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Custody No. : MA11017/140818

Sampling Date : 2014-08-18

### Test Requested & Methodology:

Item	Parameters	Ref. Method	Limit of Reporting
1	Suspended Solids (SS)	APHA 17ed 2540 D	*0.5 mg/L
2	E. coli	Environmental Microbiology Laboratory Test Method Manual TM09/EC/10/98 Issue 3 Environmental Protection Department, HK	1 cfu/100mL
3	5-day Biochemical Oxygen Demand (BOD <sub>5</sub> )	APHA 19ed 5210 B	2 mg-O <sub>2</sub> /L
4	Ammonia Nitrogen (NH <sub>3</sub> -N)	In-house method SOP057 (FIA)	*0.01 mg NH <sub>3</sub> -N/L
5	Unionized Ammonia (UIA)	By Calculation	0.001 mg/L
6	Total Kjeldahl Nitrogen (TKN)	In-house method SOP058 (FIA)	*0.1 mg N/L
7	Nitrite-nitrogen (NO <sub>2</sub> -N)	In-house method SOP068 (FIA)	*0.002 mg NO <sub>2</sub> -N/L
8	Nitrate-nitrogen (NO <sub>3</sub> -N)	In-house method SOP056 (FIA)	*0.01 mg NO <sub>3</sub> -N/L
9	Ortho-phosphate (PO <sub>4</sub> <sup>3-</sup> )	In-house method SOP054 (FIA)	*0.01 mg PO <sub>4</sub> <sup>3-</sup> -P/L
10	Total Phosphorous (TP)	In-house method SOP 055 (FIA)	*0.01 mg-P/L
11	Cadmium (Cd)	In-house method SOP 053 (ICP-AES) and SOP 076 (ICP-MS)	*0.1 µg/L
12	Chromium (Cr)		*0.2 µg/L
13	Copper (Cu)		*0.2 µg/L
14	Mercury (Hg)		*0.2 µg/L
15	Nickel (Ni)		*0.2 µg/L
16	Lead (Pb)		*0.2 µg/L
17	Silver (Ag)		*0.2 µg/L
18	Zinc (Zn)		*0.4 µg/L


Remarks: 1) \* Limit of Reporting is reported as Detection Limit

2) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

### PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**

  
**PATRICK TSE**  
Laboratory Manager

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 2 of 29

**Results:**

Sample ID	AC1-a	AC1-b	AC1-a	AC1-b	AC2-a	AC2-b
Sampling Depth	S	S	B	B	S	S
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-1	20860-105	20860-3	20860-107	20860-4	20860-108
Suspended Solids (SS), mg/L	11.4	11.3	12.7	12.9	14.0	13.9
<i>E. coli</i> , cfu/100mL	210,000	200,000	230,000	240,000	250,000	250,000
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	4	4	4	4	5	5
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.83	0.84	0.85	0.84	1.04	1.07
Unionized Ammonia (UIA), mg/L	0.087	0.075	0.024	0.025	0.101	0.098
Total Kjeldahl Nitrogen (TKN), mg N/L	1.8	1.8	1.7	1.7	1.9	1.9
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.423	0.426	0.420	0.420	0.423	0.401
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	3.27	3.30	3.35	3.40	3.54	3.60
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	1.03	1.04	1.04	1.03	1.07	1.06
Total Phosphorous (TP), mg-P/L	1.16	1.19	1.13	1.12	1.14	1.15
Cadmium (Cd), µg/L	0.1	0.1	<0.1	<0.1	0.3	0.3
Chromium (Cr), µg/L	1.8	1.9	1.8	1.8	1.9	2
Copper (Cu), µg/L	6.5	6.7	6.8	6.7	5.7	5.5
Mercury (Hg), µg/L	0.3	0.2	<0.2	<0.2	0.2	0.2
Nickel (Ni), µg/L	2.9	2.8	1.3	1.3	1.6	1.6
Lead (Pb), µg/L	0.5	0.5	1.1	1.1	1.4	1.4
Silver (Ag), µg/L	0.2	0.2	0.2	0.2	<0.2	<0.2
Zinc (Zn), µg/L	11.6	12.0	17.6	18.5	10.0	9.9

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 3 of 29

### Results:

Sample ID	AC2-a	AC2-b	AC3-a	AC3-b	AC3-a	AC3-b
Sampling Depth	B	B	S	S	B	B
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-6	20860-110	20860-7	20860-111	20860-9	20860-113
Suspended Solids (SS), mg/L	11.7	11.8	10.9	10.9	10.9	11.0
E. coli, cfu/100mL	250,000	250,000	140,000	140,000	160,000	160,000
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	5	5	5	5	5	5
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.93	0.90	0.65	0.65	0.64	0.68
Unionized Ammonia (ULA), mg/L	0.019	0.008	0.052	0.056	0.010	0.015
Total Kjeldahl Nitrogen (TKN), mg N/L	1.8	1.8	1.4	1.4	1.8	1.8
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.429	0.438	0.327	0.341	0.330	0.330
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	3.54	3.49	2.30	2.32	2.42	2.44
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	1.00	1.01	0.74	0.74	0.74	0.76
Total Phosphorous (TP), mg-P/L	1.15	1.15	0.87	0.89	0.92	0.93
Cadmium (Cd), µg/L	0.3	0.3	0.1	0.1	0.2	0.2
Chromium (Cr), µg/L	2.8	2.8	1.3	1.3	2.0	1.9
Copper (Cu), µg/L	6.1	6.1	7.5	7.5	6.7	6.8
Mercury (Hg), µg/L	<0.2	<0.2	<0.2	<0.2	0.2	0.2
Nickel (Ni), µg/L	2.5	2.4	2.7	2.7	1.8	1.8
Lead (Pb), µg/L	1.2	1.2	0.6	0.6	0.8	0.8
Silver (Ag), µg/L	0.2	0.2	0.2	0.2	<0.2	<0.2
Zinc (Zn), µg/L	10.3	10.0	10.6	11.0	21.4	20.8

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11
Page:	4 of 29

**Results:**

Sample ID	AC4-a	AC4-b	AC4-a	AC4-b	AC5-a	AC5-b
Sampling Depth	S	S	B	B	S	S
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-10	20860-114	20860-12	20860-116	20860-13	20860-117
Suspended Solids (SS), mg/L	13.2	13.5	10.1	9.9	8.8	8.5
E. coli, cfu/100mL	360,000	360,000	230,000	220,000	140,000	140,000
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	4	4	5	5	4	4
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	1.03	1.03	1.05	1.04	0.57	0.57
Unionized Ammonia (UIA), mg/L	0.110	0.080	0.006	0.005	0.054	0.066
Total Kjeldahl Nitrogen (TKN), mg N/L	2.1	2.1	2.0	1.9	1.5	1.6
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.450	0.442	0.457	0.462	0.323	0.330
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	3.20	3.22	3.12	3.24	2.18	2.24
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	1.05	1.03	1.07	1.05	0.72	0.71
Total Phosphorous (TP), mg-P/L	1.21	1.22	1.18	1.23	0.86	0.89
Cadmium (Cd), µg/L	<0.1	<0.1	<0.1	<0.1	0.1	0.1
Chromium (Cr), µg/L	1.6	1.6	2.7	2.8	1.9	1.9
Copper (Cu), µg/L	7.7	7.5	5.3	5.5	7.0	6.9
Mercury (Hg), µg/L	0.2	0.2	<0.2	<0.2	<0.2	<0.2
Nickel (Ni), µg/L	1.6	1.6	2.2	2.3	1.4	1.4
Lead (Pb), µg/L	0.5	0.5	0.9	0.9	0.7	0.7
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	19.1	19.3	16.7	16.8	9.6	9.8

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 5 of 29

### Results:

Sample ID	AC5-a	AC5-b	AC6-a	AC6-b	AC6-a	AC6-b
Sampling Depth	B	B	S	S	B	B
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-15	20860-119	20860-16	20860-120	20860-18	20860-122
Suspended Solids (SS), mg/L	11.8	11.5	9.2	9.3	10.5	10.4
E. coli, cfu/100mL	120,000	120,000	93,000	90,000	100,000	100,000
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	4	4	4	4	4	4
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.63	0.64	0.86	0.85	0.84	0.86
Unionized Ammonia (UIA), mg/L	0.004	0.002	0.079	0.086	0.010	0.006
Total Kjeldahl Nitrogen (TKN), mg N/L	1.5	1.5	2.0	2.0	1.9	1.9
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> -N/L	0.344	0.356	0.371	0.364	0.375	0.385
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> -N/L	2.41	2.34	2.39	2.40	2.40	2.42
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.77	0.74	0.86	0.84	0.86	0.86
Total Phosphorous (TP), mg-P/L	0.93	0.93	1.06	1.09	1.03	1.06
Cadmium (Cd), µg/L	0.3	0.3	0.3	0.3	0.4	0.4
Chromium (Cr), µg/L	1.3	1.3	2.6	2.5	2.7	2.8
Copper (Cu), µg/L	6.2	6.4	8.0	7.6	8.1	8.2
Mercury (Hg), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Nickel (Ni), µg/L	2.2	2.3	1.8	1.8	1.7	1.7
Lead (Pb), µg/L	0.6	0.6	1.1	1.1	1.0	1.0
Silver (Ag), µg/L	0.2	0.2	0.2	0.2	<0.2	<0.2
Zinc (Zn), µg/L	17.9	17.8	8.8	8.7	14.7	14.0

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 6 of 29

### Results:

Sample ID	AC7-a	AC7-b	AC7-a	AC7-b	KT1-a	KT1-b
Sampling Depth	S	S	B	B	S	S
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-19	20860-123	20860-21	20860-125	20860-22	20860-126
Suspended Solids (SS), mg/L	12.1	12.5	17.6	17.7	11.6	11.3
E. coli, cfu/100mL	47,000	46,000	24,000	25,000	4,000	4,100
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	4	4	5	5	6	6
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.35	0.35	0.54	0.56	0.05	0.05
Unionized Ammonia (UIA), mg/L	0.035	0.031	0.004	0.004	0.003	0.002
Total Kjeldahl Nitrogen (TKN), mg N/L	1.4	1.5	1.6	1.6	1.0	1.0
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.288	0.278	0.329	0.345	0.208	0.213
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	1.66	1.64	2.05	2.11	0.80	0.80
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.58	0.56	0.71	0.70	0.32	0.32
Total Phosphorous (TP), mg-P/L	0.77	0.75	0.89	0.91	0.52	0.50
Cadmium (Cd), µg/L	0.4	0.4	0.1	0.1	0.2	0.2
Chromium (Cr), µg/L	1.7	1.7	1.2	1.2	2.4	2.4
Copper (Cu), µg/L	7.6	7.3	5.9	5.7	7.5	7.4
Mercury (Hg), µg/L	0.3	0.3	<0.2	<0.2	0.2	0.2
Nickel (Ni), µg/L	2.6	2.5	1.3	1.2	3.1	3.1
Lead (Pb), µg/L	0.7	0.7	1.5	1.5	1.0	1.0
Silver (Ag), µg/L	0.2	0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	16.5	16.0	18.3	18.5	9.2	9.1

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 7 of 29

**Results:**

Sample ID	KT1-a	KT1-b	KT1-a	KT1-b	IB1-a	IB1-b
Sampling Depth	M	M	B	B	S	S
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-23	20860-127	20860-24	20860-128	20860-25	20860-129
Suspended Solids (SS), mg/L	10.9	10.4	10.9	10.7	5.1	5.0
<i>E. coli</i> , cfu/100mL	2,100	2,200	770	780	170	180
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	5	5	5	5	<2	<2
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.03	0.03	0.03	0.03	0.06	0.06
Unionized Ammonia (ULA), mg/L	<0.001	<0.001	<0.001	<0.001	0.006	0.006
Total Kjeldahl Nitrogen (TKN), mg N/L	1.0	1.0	1.1	1.1	0.2	0.2
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> -N/L	0.184	0.192	0.181	0.189	0.074	0.074
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> -N/L	0.86	0.84	0.90	0.90	0.26	0.27
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.33	0.33	0.31	0.30	0.02	0.02
Total Phosphorous (TP), mg-P/L	0.51	0.52	0.54	0.53	0.05	0.05
Cadmium (Cd), µg/L	0.5	0.5	0.5	0.5	0.2	0.2
Chromium (Cr), µg/L	3.0	2.9	1.0	1.0	1.1	1.1
Copper (Cu), µg/L	7.8	8.1	7.2	7.0	7.3	7.1
Mercury (Hg), µg/L	0.2	0.3	<0.2	<0.2	0.3	0.3
Nickel (Ni), µg/L	1.5	1.4	1.6	1.5	1.3	1.3
Lead (Pb), µg/L	1.0	1.0	0.7	0.7	1.3	1.3
Silver (Ag), µg/L	<0.2	<0.2	0.2	<0.2	0.2	0.2
Zinc (Zn), µg/L	11.7	12.2	18.7	19.2	23.2	23.7

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 8 of 29

### Results:

Sample ID	IB1-a	IB1-b	IB1-a	IB1-b	IB2-a	IB2-b
Sampling Depth	M	M	B	B	S	S
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-26	20860-130	20860-27	20860-131	20860-28	20860-132
Suspended Solids (SS), mg/L	4.5	4.6	4.4	4.4	4.1	4.1
<i>E. coli</i> , cfu/100mL	340	350	400	400	520	510
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	<2	<2	<2	<2	<2	<2
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.03	0.03	0.04	0.03	0.03	0.03
Unionized Ammonia (UIA), mg/L	0.003	0.003	0.003	0.003	0.003	0.003
Total Kjeldahl Nitrogen (TKN), mg N/L	0.3	0.3	0.3	0.3	0.2	0.2
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.076	0.075	0.076	0.080	0.078	0.078
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.27	0.26	0.27	0.27	0.28	0.27
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.02	0.02	0.02	0.02	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.06	0.06	0.07	0.07	0.06	0.06
Cadmium (Cd), µg/L	<0.1	<0.1	0.4	0.5	<0.1	<0.1
Chromium (Cr), µg/L	2.7	2.8	2.0	2.0	2.6	2.7
Copper (Cu), µg/L	5.7	5.7	5.8	5.7	7.9	8.0
Mercury (Hg), µg/L	<0.2	<0.2	<0.2	<0.2	0.2	0.2
Nickel (Ni), µg/L	2.4	2.5	1.1	1.1	2.1	2.1
Lead (Pb), µg/L	1.3	1.3	1.0	1.0	0.5	0.5
Silver (Ag), µg/L	<0.2	<0.2	0.2	0.2	<0.2	<0.2
Zinc (Zn), µg/L	15.6	15.1	14.1	14.1	22.2	21.2

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 9 of 29

### Results:

Sample ID	IB2-a	IB2-b	IB2-a	IB2-b	IB3-a	IB3-b
Sampling Depth	M	M	B	B	S	S
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-29	20860-133	20860-30	20860-134	20860-31	20860-135
Suspended Solids (SS), mg/L	6.0	6.2	4.9	4.7	7.6	7.4
<i>E. coli</i> , cfu/100mL	570	570	500	500	4,000	4,000
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	<2	<2	<2	<2	<2	<2
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.09	0.09	0.07	0.07	0.02	0.02
Unionized Ammonia (UIA), mg/L	0.012	0.012	0.008	0.008	0.002	0.002
Total Kjeldahl Nitrogen (TKN), mg N/L	0.2	0.2	0.2	0.2	0.3	0.3
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.074	0.076	0.077	0.076	0.077	0.077
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.30	0.29	0.27	0.28	0.27	0.28
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.03	0.03	0.03	0.03	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.06	0.06	0.06	0.06	0.08	0.08
Cadmium (Cd), µg/L	0.2	0.2	0.5	0.5	0.1	0.1
Chromium (Cr), µg/L	1.5	1.5	2.9	3.0	2.0	2.0
Copper (Cu), µg/L	6.8	6.9	7.5	7.5	6.9	7.1
Mercury (Hg), µg/L	<0.2	<0.2	0.2	0.2	0.2	0.2
Nickel (Ni), µg/L	2.5	2.5	1.2	1.1	1.1	1.1
Lead (Pb), µg/L	1.4	1.5	1.0	1.0	0.5	0.5
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	11.5	11.4	14.4	14.3	16.0	16.7

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 10 of 29

### Results:

Sample ID	IB3-a	IB3-b	IB3-a	IB3-b	OB1-a	OB1-b
Sampling Depth	M	M	B	B	S	S
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-32	20860-136	20860-33	20860-137	20860-34	20860-138
Suspended Solids (SS), mg/L	5.3	5.4	10.6	10.2	13.5	13.5
E. coli, cfu/100mL	3,900	3,900	2,100	2,100	240	230
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	<2	<2	<2	<2	<2	<2
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	<0.01	<0.01	0.06	0.06	0.03	0.03
Unionized Ammonia (ULA), mg/L	<0.001	<0.001	0.009	0.009	0.003	0.003
Total Kjeldahl Nitrogen (TKN), mg N/L	0.3	0.3	0.3	0.3	0.3	0.3
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.075	0.073	0.076	0.076	0.074	0.074
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.27	0.27	0.28	0.29	0.27	0.28
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.03	0.03	0.03	0.03	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.06	0.06	0.07	0.07	0.06	0.06
Cadmium (Cd), µg/L	<0.1	<0.1	0.4	0.4	0.4	0.4
Chromium (Cr), µg/L	1.5	1.5	1.8	1.8	1.5	1.5
Copper (Cu), µg/L	7.2	7.4	7.0	7.1	6.5	6.7
Mercury (Hg), µg/L	<0.2	<0.2	0.2	0.2	0.3	0.3
Nickel (Ni), µg/L	2.9	2.9	2.5	2.4	1.7	1.7
Lead (Pb), µg/L	0.9	0.9	1.1	1.1	1.1	1.0
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	14.8	14.9	11.7	11.9	12.9	13.1

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 11 of 29

**Results:**

Sample ID	OB1-a	OB1-b	OB1-a	OB1-b	VH1-a	VH1-b
Sampling Depth	M	M	B	B	S	S
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-35	20860-139	20860-36	20860-140	20860-37	20860-141
Suspended Solids (SS), mg/L	10.1	10.3	5.5	5.3	6.5	6.4
E. coli, cfu/100mL	400	400	4,700	4,800	860	880
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	<2	<2	<2	<2	<2	<2
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	<0.01	<0.01	0.02	0.02	0.04	0.04
Unionized Ammonia (UIA), mg/L	<0.001	<0.001	0.002	0.002	0.009	0.008
Total Kjeldahl Nitrogen (TKN), mg N/L	0.3	0.3	0.3	0.3	0.2	0.2
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.076	0.078	0.077	0.080	0.076	0.076
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.28	0.29	0.28	0.30	0.29	0.29
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.03	0.03	0.03	0.03	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.06	0.06	0.07	0.07	0.06	0.06
Cadmium (Cd), µg/L	0.4	0.4	0.4	0.4	0.2	0.2
Chromium (Cr), µg/L	2.6	2.7	3.1	3.2	2.6	2.7
Copper (Cu), µg/L	7.4	7.6	8.0	8.0	6.3	6.5
Mercury (Hg), µg/L	0.2	0.2	0.2	0.2	<0.2	<0.2
Nickel (Ni), µg/L	1.3	1.3	1.8	1.9	1.3	1.3
Lead (Pb), µg/L	1.4	1.4	1.4	1.5	0.7	0.7
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	15.4	15.3	19.4	19.3	21.0	20.9

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 12 of 29

### Results:

Sample ID	VH1-a	VH1-b	VH1-a	VH1-b	VH2-a	VH2-b
Sampling Depth	M	M	B	B	S	S
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-38	20860-142	20860-39	20860-143	20860-40	20860-144
Suspended Solids (SS), mg/L	3.9	4.0	8.9	8.5	5.3	5.5
<i>E. coli</i> , cfu/100mL	2,200	2,200	5,100	5,100	160	160
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	<2	<2	<2	<2	<2	<2
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.07	0.07	0.14	0.15	0.09	0.09
Unionized Ammonia (UIA), mg/L	0.005	0.005	0.008	0.008	0.010	0.010
Total Kjeldahl Nitrogen (TKN), mg N/L	0.3	0.3	0.4	0.4	0.4	0.4
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> -N/L	0.080	0.077	0.077	0.074	0.070	0.069
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> -N/L	0.29	0.31	0.35	0.36	0.29	0.30
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.03	0.03	0.03	0.03	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.07	0.07	0.07	0.07	0.10	0.10
Cadmium (Cd), µg/L	0.1	0.1	0.1	0.1	0.2	0.2
Chromium (Cr), µg/L	1.9	1.9	1.8	1.7	1.3	1.3
Copper (Cu), µg/L	7.1	7.0	6.6	6.5	5.4	5.4
Mercury (Hg), µg/L	<0.2	<0.2	0.2	0.2	0.3	0.3
Nickel (Ni), µg/L	1.3	1.3	1.4	1.4	1.8	1.8
Lead (Pb), µg/L	1.6	1.6	1.0	1.0	0.7	0.7
Silver (Ag), µg/L	0.2	0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	13.2	13.0	14.2	14.0	16.3	15.8

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 13 of 29

### Results:

Sample ID	VH2-a	VH2-b	VH2-a	VH2-b	KTN-a	KTN-b
Sampling Depth	M	M	B	B	M	M
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-41	20860-145	20860-42	20860-146	20860-44	20860-148
Suspended Solids (SS), mg/L	6.8	6.5	5.6	5.5	11.1	11.1
E. coli, cfu/100mL	320	330	120	120	140,000	140,000
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	<2	<2	<2	<2	6	6
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.06	0.06	0.06	0.06	1.06	1.06
Unionized Ammonia (UAN), mg/L	0.005	0.005	0.002	0.002	0.029	0.050
Total Kjeldahl Nitrogen (TKN), mg N/L	0.3	0.3	0.4	0.4	2.2	2.2
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.079	0.080	0.071	0.071	0.431	0.452
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.30	0.30	0.28	0.28	5.07	4.95
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.03	0.03	0.03	0.03	1.28	1.24
Total Phosphorous (TP), mg-P/L	0.07	0.07	0.08	0.08	1.41	1.41
Cadmium (Cd), µg/L	0.1	0.1	0.2	0.2	<0.1	<0.1
Chromium (Cr), µg/L	2.7	2.6	1.0	1.0	1.9	1.9
Copper (Cu), µg/L	7.6	8.0	7.6	7.5	7.6	7.4
Mercury (Hg), µg/L	0.2	0.2	0.3	0.3	0.2	0.2
Nickel (Ni), µg/L	3.0	3.0	1.5	1.5	1.7	1.8
Lead (Pb), µg/L	1.3	1.3	0.8	0.8	0.8	0.8
Silver (Ag), µg/L	0.2	0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	23.3	23.2	22.4	23.2	18.4	18.3

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 14 of 29

### Results:

Sample ID	JVC-a	JVC-b	JVC-a	JVC-b	WSD Intake at Tai Wan-a	WSD Intake at Tai Wan-b
Sampling Depth	S	S	B	B	N/A	N/A
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-46	20860-150	20860-48	20860-152	20860-49	20860-153
Suspended Solids (SS), mg/L	9.4	9.8	10.4	10.3	5.5	5.6
E. coli, cfu/100mL	230,000	230,000	200,000	190,000	330	330
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	4	4	4	4	<2	<2
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	1.07	1.10	1.07	1.07	0.07	0.07
Unionized Ammonia (UIA), mg/L	0.097	0.109	0.005	0.005	0.010	0.010
Total Kjeldahl Nitrogen (TKN), mg N/L	2.2	2.2	2.0	2.0	0.4	0.4
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.472	0.470	0.474	0.472	0.073	0.075
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	3.43	3.25	3.57	3.46	0.27	0.27
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	1.10	1.08	1.11	1.17	0.03	0.03
Total Phosphorous (TP), mg-P/L	1.25	1.23	1.24	1.26	0.07	0.07
Cadmium (Cd), µg/L	0.4	0.4	0.2	0.2	<0.1	<0.1
Chromium (Cr), µg/L	2.7	2.7	1.4	1.5	1.0	1.1
Copper (Cu), µg/L	6.9	6.9	7.5	7.5	5.5	5.3
Mercury (Hg), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Nickel (Ni), µg/L	2.2	2.3	1.7	1.6	2.5	2.5
Lead (Pb), µg/L	1.4	1.4	1.3	1.3	1.5	1.5
Silver (Ag), µg/L	0.2	0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	17.2	17.6	17.8	18.7	12.6	12.3

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 15 of 29

### Results:

Sample ID	WSD Intake at Cha Kwo Ling-a	WSD Intake at Cha Kwo Ling-b	WSD Intake at Quarry Bay-a	WSD Intake at Quarry Bay-b	WSD Intake at Sai Wan Ho-a	WSD Intake at Sai Wan Ho-b
Sampling Depth	N/A	N/A	N/A	N/A	N/A	N/A
Tide	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb	Mid-Ebb
Sample Number	20860-50	20860-154	20860-51	20860-155	20860-52	20860-156
Suspended Solids (SS), mg/L	9.4	9.6	3.6	3.6	14.4	14.1
E. coli, cfu/100mL	170	170	250	250	420	410
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	<2	<2	<2	<2	<2	<2
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.02	0.02	<0.01	<0.01	0.06	0.06
Unionized Ammonia (UIA), mg/L	<0.001	<0.001	<0.001	<0.001	0.001	0.001
Total Kjeldahl Nitrogen (TKN), mg N/L	0.7	0.7	0.3	0.3	0.4	0.4
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.068	0.070	0.075	0.078	0.075	0.075
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.26	0.26	0.30	0.29	0.29	0.27
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.02	0.02	0.03	0.03	0.02	0.02
Total Phosphorous (TP), mg-P/L	0.14	0.14	0.07	0.07	0.07	0.07
Cadmium (Cd), µg/L	<0.1	<0.1	<0.1	<0.1	0.5	0.4
Chromium (Cr), µg/L	1.1	1.0	1.2	1.2	1.9	1.9
Copper (Cu), µg/L	6.7	6.8	6.2	6.0	5.7	5.7
Mercury (Hg), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Nickel (Ni), µg/L	1.2	1.3	2.3	2.3	1.7	1.7
Lead (Pb), µg/L	0.9	0.9	1.4	1.3	1.0	0.9
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	0.2	0.2
Zinc (Zn), µg/L	8.3	8.1	21.3	20.5	8.9	9.4

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 16 of 29

### Results:

Sample ID	AC1-a	AC1-b	AC1-a	AC1-b	AC2-a	AC2-b
Sampling Depth	S	S	B	B	S	S
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-53	20860-157	20860-55	20860-159	20860-56	20860-160
Suspended Solids (SS), mg/L	13.9	14.2	11.6	11.5	13.3	13.5
E. coli, cfu/100mL	5,400	5,500	4,100	4,300	3,900	3,800
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	6	6	6	6	6	6
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.16	0.16	<0.01	<0.01	0.03	0.03
Unionized Ammonia (UIA), mg/L	0.016	0.014	<0.001	<0.001	0.002	0.003
Total Kjeldahl Nitrogen (TKN), mg N/L	1.2	1.2	0.9	0.9	1.3	1.2
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> -N/L	0.095	0.091	0.032	0.033	0.147	0.145
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> -N/L	0.45	0.46	0.21	0.20	0.93	0.92
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.16	0.16	0.05	0.05	0.24	0.23
Total Phosphorous (TP), mg-P/L	0.38	0.39	0.19	0.19	0.47	0.46
Cadmium (Cd), µg/L	0.2	0.2	0.2	0.2	<0.1	<0.1
Chromium (Cr), µg/L	2.8	2.9	1.3	1.3	1.4	1.4
Copper (Cu), µg/L	6.5	6.3	7.6	7.8	7.9	8.3
Mercury (Hg), µg/L	0.2	0.2	0.2	0.2	0.3	0.3
Nickel (Ni), µg/L	1.3	1.3	3.0	3.0	1.4	1.4
Lead (Pb), µg/L	1.3	1.3	0.9	0.9	1.0	1.0
Silver (Ag), µg/L	<0.2	<0.2	0.2	0.2	<0.2	<0.2
Zinc (Zn), µg/L	21.9	22.2	16.7	15.7	18.1	18.0

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 17 of 29

### Results:

Sample ID	AC2-a	AC2-b	AC3-a	AC3-b	AC3-a	AC3-b
Sampling Depth	B	B	S	S	B	B
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-58	20860-162	20860-59	20860-163	20860-61	20860-165
Suspended Solids (SS), mg/L	12.5	12.4	10.1	9.8	16.9	16.4
E. coli, cfu/100mL	520	530	2,000	2,000	520	530
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	6	6	<2	<2	<2	<2
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.43	0.42	<0.01	<0.01	0.08	0.08
Unionized Ammonia (UIA), mg/L	0.001	0.001	<0.001	<0.001	0.002	0.002
Total Kjeldahl Nitrogen (TKN), mg N/L	1.6	1.6	0.8	0.8	0.7	0.7
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.026	0.025	0.056	0.057	0.051	0.050
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.05	0.05	0.24	0.24	0.39	0.38
Ortho-phosphate (PO <sub>4</sub> <sup>3-</sup> -P/L)	0.09	0.09	0.06	0.06	0.05	0.05
Total Phosphorous (TP), mg-P/L	0.32	0.33	0.20	0.20	0.18	0.18
Cadmium (Cd), µg/L	0.4	0.4	0.2	0.3	0.5	0.5
Chromium (Cr), µg/L	2.8	2.9	1.3	1.3	2.3	2.4
Copper (Cu), µg/L	5.3	5.3	5.8	5.9	7.5	7.6
Mercury (Hg), µg/L	<0.2	<0.2	0.2	0.2	0.3	0.3
Nickel (Ni), µg/L	3.1	2.9	2.7	2.7	1.7	1.7
Lead (Pb), µg/L	1.2	1.2	1.1	1.2	0.9	0.9
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	18.8	18.2	22.6	23.3	8.8	8.6

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 18 of 29

**Results:**

Sample ID	AC4-a	AC4-b	AC4-a	AC4-b	AC5-a	AC5-b
Sampling Depth	S	S	B	B	S	S
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-62	20860-166	20860-64	20860-168	20860-65	20860-169
Suspended Solids (SS), mg/L	14.7	14.2	6.2	6.1	9.7	10.0
<i>E. coli</i> , cfu/100mL	2,700	2,600	760	750	3,300	3,300
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	8	8	9	9	9	9
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.09	0.09	0.12	0.12	0.16	0.16
Unionized Ammonia (UIA), mg/L	0.008	0.009	<0.001	<0.001	0.011	0.011
Total Kjeldahl Nitrogen (TKN), mg N/L	1.2	1.2	0.9	0.9	0.9	0.9
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> -N/L	0.107	0.109	0.061	0.063	0.106	0.102
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> -N/L	0.40	0.40	0.41	0.42	0.49	0.50
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.13	0.13	0.06	0.06	0.15	0.15
Total Phosphorous (TP), mg-P/L	0.34	0.33	0.21	0.21	0.32	0.32
Cadmium (Cd), µg/L	0.4	0.5	0.1	0.1	0.2	0.2
Chromium (Cr), µg/L	1.9	2.0	2.7	2.7	2.7	2.8
Copper (Cu), µg/L	7.9	7.6	6.0	6.1	7.8	7.5
Mercury (Hg), µg/L	0.3	0.3	<0.2	<0.2	0.2	0.2
Nickel (Ni), µg/L	2.2	2.1	2.3	2.3	2.2	2.2
Lead (Pb), µg/L	1.2	1.2	1.1	1.2	1.4	1.4
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	19.8	19.7	10.4	10.3	17.8	18.6

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 19 of 29

### Results:

Sample ID	AC5-a	AC5-b	AC6-a	AC6-b	AC6-a	AC6-b
Sampling Depth	B	B	S	S	B	B
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-67	20860-171	20860-68	20860-172	20860-70	20860-174
Suspended Solids (SS), mg/L	16.3	16.7	11.6	11.1	17.3	16.7
E. coli, cfu/100mL	3,300	3,400	2,800	2,800	180	180
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	9	9	9	9	9	9
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.17	0.17	0.10	0.11	0.09	0.09
Unionized Ammonia (UIA), mg/L	0.004	0.003	0.006	0.006	<0.001	<0.001
Total Kjeldahl Nitrogen (TKN), mg N/L	1.0	1.0	0.9	0.9	0.5	0.5
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.195	0.198	0.096	0.096	0.043	0.043
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	1.19	1.11	0.43	0.42	0.30	0.31
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.37	0.37	0.11	0.11	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.57	0.56	0.29	0.28	0.12	0.12
Cadmium (Cd), µg/L	0.4	0.4	0.1	0.1	0.2	0.2
Chromium (Cr), µg/L	2.1	2.1	1.0	1.0	2.0	1.9
Copper (Cu), µg/L	5.5	5.7	5.8	5.8	8.1	7.8
Mercury (Hg), µg/L	<0.2	<0.2	0.2	0.2	<0.2	<0.2
Nickel (Ni), µg/L	1.3	1.3	3.0	3.0	2.3	2.3
Lead (Pb), µg/L	1.3	1.3	0.6	0.6	1.6	1.6
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	14.5	14.4	13.4	13.7	20.5	20.8

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 20 of 29

### Results:

Sample ID	AC7-a	AC7-b	AC7-a	AC7-b	KT1-a	KT1-b
Sampling Depth	S	S	B	B	S	S
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-71	20860-175	20860-73	20860-177	20860-74	20860-178
Suspended Solids (SS), mg/L	17.1	16.7	11.4	11.4	11.3	11.4
<i>E. coli</i> , cfu/100mL	5,000	5,000	280	280	3,100	3,100
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	10	10	10	10	8	8
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.18	0.18	0.11	0.11	0.14	0.14
Unionized Ammonia (UIA), mg/L	0.011	0.014	0.001	0.002	0.007	0.009
Total Kjeldahl Nitrogen (TKN), mg N/L	1.0	1.0	0.4	0.4	0.3	0.3
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.144	0.140	0.072	0.071	0.064	0.063
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.77	0.77	0.46	0.46	0.31	0.31
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.23	0.24	0.06	0.06	0.06	0.06
Total Phosphorous (TP), mg-P/L	0.42	0.43	0.13	0.13	0.09	0.09
Cadmium (Cd), µg/L	0.3	0.3	0.4	0.4	0.4	0.4
Chromium (Cr), µg/L	1.6	1.6	1.9	1.9	2.4	2.4
Copper (Cu), µg/L	7.8	7.7	5.5	5.5	6.4	6.6
Mercury (Hg), µg/L	0.3	0.3	<0.2	<0.2	<0.2	<0.2
Nickel (Ni), µg/L	2.6	2.7	1.3	1.2	2.4	2.4
Lead (Pb), µg/L	1.2	1.2	0.9	0.9	1.1	1.1
Silver (Ag), µg/L	0.2	0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	16.9	17.8	20.8	19.9	18.1	18.7

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 21 of 29

### Results:

Sample ID	KT1-a	KT1-b	KT1-a	KT1-b	IB1-a	IB1-b
Sampling Depth	M	M	B	B	S	S
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-75	20860-179	20860-76	20860-180	20860-77	20860-181
Suspended Solids (SS), mg/L	15.9	15.6	12.0	11.8	5.3	5.4
<i>E. coli</i> , cfu/100mL	700	720	450	460	46	46
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	7	7	5	5	4	4
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	1.39	1.45	0.02	0.02	0.02	0.02
Unionized Ammonia (UIA), mg/L	0.027	0.028	<0.001	<0.001	0.001	0.001
Total Kjeldahl Nitrogen (TKN), mg N/L	2.0	2.0	0.3	0.3	0.3	0.3
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.110	0.110	0.076	0.075	0.090	0.087
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.83	0.79	0.39	0.38	0.32	0.32
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.16	0.16	0.07	0.07	0.02	0.02
Total Phosphorous (TP), mg-P/L	0.27	0.27	0.11	0.11	0.06	0.06
Cadmium (Cd), µg/L	0.3	0.3	0.4	0.3	0.2	0.2
Chromium (Cr), µg/L	1.5	1.5	2.1	2.0	2.2	2.2
Copper (Cu), µg/L	7.6	7.4	5.8	6.1	5.1	5.1
Mercury (Hg), µg/L	<0.2	<0.2	0.3	0.3	<0.2	<0.2
Nickel (Ni), µg/L	2.2	2.1	2.8	2.8	2.8	2.8
Lead (Pb), µg/L	1.2	1.2	1.2	1.1	0.9	1.0
Silver (Ag), µg/L	<0.2	<0.2	0.2	0.2	<0.2	<0.2
Zinc (Zn), µg/L	10.2	9.9	18.1	18.6	14.5	14.5

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 22 of 29

**Results:**

Sample ID	IB1-a	IB1-b	IB1-a	IB1-b	IB2-a	IB2-b
Sampling Depth	M	M	B	B	S	S
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-78	20860-182	20860-79	20860-183	20860-80	20860-184
Suspended Solids (SS), mg/L	3.8	3.9	8.3	8.3	7.3	7.2
<i>E. coli</i> , cfu/100mL	120	120	32	33	76	74
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	3	3	<2	<2	5	5
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	<0.01	<0.01	0.06	0.07	0.05	0.05
Unionized Ammonia (UIA), mg/L	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Total Kjeldahl Nitrogen (TKN), mg N/L	0.3	0.3	0.2	0.2	0.3	0.3
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.094	0.094	0.095	0.094	0.095	0.098
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.33	0.32	0.33	0.32	0.34	0.34
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.03	0.03	0.03	0.03	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.06	0.06	0.05	0.05	0.06	0.06
Cadmium (Cd), µg/L	0.4	0.4	0.2	0.2	0.3	0.3
Chromium (Cr), µg/L	1.9	2.0	2.2	2.2	1.1	1.0
Copper (Cu), µg/L	5.2	5.2	8.0	8.1	5.9	6.1
Mercury (Hg), µg/L	<0.2	<0.2	<0.2	<0.2	0.3	0.3
Nickel (Ni), µg/L	1.4	1.4	1.9	1.9	2.8	2.7
Lead (Pb), µg/L	1.2	1.3	1.3	1.2	1.0	1.1
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	9.5	9.5	11.2	11.3	20.0	19.2

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 23 of 29

**Results:**

Sample ID	IB2-a	IB2-b	IB2-a	IB2-b	IB3-a	IB3-b
Sampling Depth	M	M	B	B	S	S
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-81	20860-185	20860-82	20860-186	20860-83	20860-187
Suspended Solids (SS), mg/L	3.6	3.6	6.2	6.4	8.8	8.6
<i>E. coli</i> , cfu/100mL	34	33	110	120	220	220
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	7	7	<2	<2	4	4
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.03	0.03	0.05	0.05	0.04	0.04
Unionized Ammonia (UIA), mg/L	<0.001	<0.001	<0.001	<0.001	0.002	<0.001
Total Kjeldahl Nitrogen (TKN), mg N/L	0.8	0.8	0.3	0.3	0.3	0.3
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.093	0.090	0.090	0.089	0.087	0.088
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.32	0.32	0.32	0.32	0.31	0.32
Ortho-phosphate (PO <sub>4</sub> <sup>3-</sup> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.03	0.03	0.03	0.03	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.06	0.06	0.06	0.06	0.06	0.06
Cadmium (Cd), µg/L	0.3	0.3	<0.2	<0.1	0.3	0.3
Chromium (Cr), µg/L	2.9	2.8	1.8	1.8	2.7	2.8
Copper (Cu), µg/L	7.9	8.0	6.9	7.1	6.6	6.4
Mercury (Hg), µg/L	<0.2	<0.2	0.3	0.3	0.2	0.2
Nickel (Ni), µg/L	1.1	1.1	1.6	1.6	1.4	1.4
Lead (Pb), µg/L	0.7	0.7	0.9	0.9	1.3	1.3
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	16.5	16.5	13.6	14.0	12.5	12.2

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 24 of 29

**Results:**

Sample ID	IB3-a	IB3-b	IB3-a	IB3-b	OB1-a	OB1-b
Sampling Depth	M	M	B	B	S	S
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-84	20860-188	20860-85	20860-189	20860-86	20860-190
Suspended Solids (SS), mg/L	4.7	4.9	11.8	11.7	3.3	3.2
<i>E. coli</i> , cfu/100mL	48	49	330	320	6	6
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	4	4	<2	<2	4	4
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.02	0.02	0.14	0.14	0.08	0.08
Unionized Ammonia (UIA), mg/L	<0.001	<0.001	0.001	0.001	0.001	<0.001
Total Kjeldahl Nitrogen (TKN), mg N/L	0.3	0.3	0.4	0.4	0.3	0.3
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.084	0.082	0.143	0.148	0.097	0.094
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.31	0.32	0.33	0.33	0.33	0.35
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.03	0.03	0.03	0.03	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.06	0.06	0.07	0.07	0.06	0.06
Cadmium (Cd), µg/L	0.4	0.4	<0.2	<0.1	0.2	0.2
Chromium (Cr), µg/L	2.8	2.8	1.4	1.4	2.1	2.1
Copper (Cu), µg/L	6.6	6.9	5.5	5.4	6.8	6.8
Mercury (Hg), µg/L	0.2	0.2	0.2	0.2	0.2	0.2
Nickel (Ni), µg/L	2.2	2.2	1.6	1.5	3.0	3.1
Lead (Pb), µg/L	0.7	0.8	0.9	0.9	1.2	1.2
Silver (Ag), µg/L	0.2	0.2	0.2	0.2	<0.2	<0.2
Zinc (Zn), µg/L	12.2	12.2	22.1	22.4	19.3	19.3

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 25 of 29

### Results:

Sample ID	OB1-a	OB1-b	OB1-a	OB1-b	VH1-a	VH1-b
Sampling Depth	M	M	B	B	S	S
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-87	20860-191	20860-88	20860-192	20860-89	20860-193
Suspended Solids (SS), mg/L	5.5	5.4	3.3	3.3	4.1	4.2
E. coli, cfu/100mL	56	56	210	210	110	110
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	3	3	<2	<2	5	5
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.04	0.04	0.07	0.07	0.05	0.05
Unionized Ammonia (UIA), mg/L	<0.001	<0.001	<0.001	<0.001	0.003	0.003
Total Kjeldahl Nitrogen (TKN), mg N/L	0.3	0.3	0.3	0.3	0.3	0.3
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.087	0.084	0.075	0.077	0.086	0.086
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.30	0.30	0.29	0.29	0.34	0.36
Ortho-phosphate (PO <sub>4</sub> <sup>3-</sup> -P/L)	0.03	0.03	0.03	0.03	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.06	0.06	0.06	0.06	0.06	0.06
Cadmium (Cd), µg/L	0.4	0.4	0.4	0.4	0.2	0.2
Chromium (Cr), µg/L	2.7	2.7	2.2	2.2	1.2	1.2
Copper (Cu), µg/L	5.3	5.5	5.3	5.2	5.5	5.6
Mercury (Hg), µg/L	0.2	0.2	0.3	0.3	0.2	0.2
Nickel (Ni), µg/L	1.8	1.9	2.2	2.2	1.9	1.9
Lead (Pb), µg/L	1.3	1.3	1.3	1.3	1.2	1.2
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	10.1	10.3	8.4	8.8	14.3	13.8

Remarks: 1) <= less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 26 of 29

**Results:**

Sample ID	VH1-a	VH1-b	VH1-a	VH1-b	VH2-a	VH2-b
Sampling Depth	M	M	B	B	S	S
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-90	20860-194	20860-91	20860-195	20860-92	20860-196
Suspended Solids (SS), mg/L	4.1	4.0	2.9	2.8	3.6	3.8
<i>E. coli</i> , cfu/100mL	390	400	3,700	3,600	28	27
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	4	4	<2	<2	<2	<2
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.10	0.10	0.09	0.09	0.02	0.02
Unionized Ammonia (UIA), mg/L	0.002	0.002	0.001	0.001	0.002	0.002
Total Kjeldahl Nitrogen (TKN), mg N/L	0.2	0.2	0.2	0.2	0.4	0.4
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> -N/L	0.051	0.053	0.039	0.038	0.088	0.088
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> -N/L	0.31	0.31	0.16	0.16	0.29	0.28
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.03	0.03	0.03	0.03	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.06	0.06	0.06	0.06	0.06	0.06
Cadmium (Cd), µg/L	0.3	0.3	0.4	0.4	<0.1	<0.1
Chromium (Cr), µg/L	2.5	2.5	1.9	1.9	2.4	2.3
Copper (Cu), µg/L	6.0	6.1	7.1	6.9	6.6	6.9
Mercury (Hg), µg/L	<0.2	<0.2	0.2	0.2	0.2	0.2
Nickel (Ni), µg/L	2.6	2.5	3.0	3.1	1.2	1.2
Lead (Pb), µg/L	0.5	0.5	0.8	0.8	0.7	0.7
Silver (Ag), µg/L	<0.2	<0.2	0.2	0.2	<0.2	<0.2
Zinc (Zn), µg/L	10.3	10.1	21.6	21.6	14.6	14.1

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 27 of 29

**Results:**

Sample ID	VH2-a	VH2-b	VH2-a	VH2-b	KTN-a	KTN-b
Sampling Depth	M	M	B	B	M	M
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-93	20860-197	20860-94	20860-198	20860-96	20860-200
Suspended Solids (SS), mg/L	4.7	4.5	3.5	3.5	9.5	9.7
<i>E. coli</i> , cfu/100mL	150	160	350	350	190,000	190,000
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	<2	<2	<2	<2	4	4
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.04	0.04	0.02	0.02	1.50	1.46
Unionized Ammonia (UIA), mg/L	0.001	0.001	<0.001	<0.001	0.070	0.073
Total Kjeldahl Nitrogen (TKN), mg N/L	<0.1	<0.1	0.2	0.2	2.7	2.7
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> -N/L	0.066	0.066	0.050	0.048	0.603	0.605
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> -N/L	0.23	0.23	0.19	0.20	3.78	3.80
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.03	0.03	0.03	0.03	1.39	1.40
Total Phosphorous (TP), mg-P/L	0.09	0.09	0.06	0.06	1.58	1.50
Cadmium (Cd), µg/L	0.2	0.2	0.4	0.4	0.1	0.1
Chromium (Cr), µg/L	2.8	2.8	1.9	2.0	1.0	1.0
Copper (Cu), µg/L	7.8	7.9	5.5	5.4	6.9	6.8
Mercury (Hg), µg/L	0.2	0.2	0.2	0.2	0.2	0.2
Nickel (Ni), µg/L	1.1	1.1	1.5	1.5	1.2	1.2
Lead (Pb), µg/L	0.5	0.5	0.5	0.5	1.4	1.5
Silver (Ag), µg/L	<0.2	<0.2	0.2	0.2	0.2	0.2
Zinc (Zn), µg/L	10.8	10.2	16.1	16.0	16.0	16.1

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 28 of 29

### Results:

Sample ID	JVC-a	JVC-b	JVC-a	JVC-b	WSD Intake at Tai Wan-a	WSD Intake at Tai Wan-b
Sampling Depth	S	S	B	B	N/A	N/A
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-98	20860-202	20860-100	20860-204	20860-101	20860-205
Suspended Solids (SS), mg/L	7.7	7.4	8.8	8.8	4.7	4.7
E. coli, cfu/100mL	4,000	4,200	810	770	120	120
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	6	6	5	5	6	6
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.16	0.16	0.11	0.11	0.06	0.06
Unionized Ammonia (UIA), mg/L	0.013	0.011	<0.001	<0.001	<0.001	<0.001
Total Kjeldahl Nitrogen (TKN), mg N/L	1.0	1.0	0.7	0.7	0.4	0.4
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> -N/L	0.086	0.084	0.066	0.065	0.084	0.081
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> -N/L	0.32	0.33	0.28	0.29	0.30	0.30
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.10	0.10	0.06	0.06	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.28	0.29	0.18	0.18	0.07	0.07
Cadmium (Cd), µg/L	0.1	0.1	0.2	0.2	0.5	0.5
Chromium (Cr), µg/L	1.6	1.7	2.9	2.9	1.2	1.1
Copper (Cu), µg/L	6.4	6.6	5.1	5.1	7.9	7.9
Mercury (Hg), µg/L	0.2	0.2	0.2	0.2	0.2	0.2
Nickel (Ni), µg/L	2.9	3.0	1.5	1.4	1.7	1.7
Lead (Pb), µg/L	0.8	0.8	0.6	0.6	1.1	1.1
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	14.6	15.0	9.1	9.0	17.5	17.2

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 29 of 29

### Results:

Sample ID	WSD Intake at Cha Kwo Ling-a	WSD Intake at Cha Kwo Ling-b	WSD Intake at Quarry Bay-a	WSD Intake at Quarry Bay-b	WSD Intake at Sai Wan Ho-a	WSD Intake at Sai Wan Ho-b
Sampling Depth	N/A	N/A	N/A	N/A	N/A	N/A
Tide	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood	Mid-Flood
Sample Number	20860-102	20860-206	20860-103	20860-207	20860-104	20860-208
Suspended Solids (SS), mg/L	3.7	3.7	10.0	9.8	9.2	9.4
E. coli, cfu/100mL	86	86	430	430	220	220
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	4	4	<2	<2	5	5
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	0.06	0.07	0.07	0.07	0.03	0.03
Unionized Ammonia (UIA), mg/L	<0.001	0.001	0.009	0.009	<0.001	<0.001
Total Kjeldahl Nitrogen (TKN), mg N/L	0.3	0.3	0.2	0.2	0.3	0.3
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> <sup>-</sup> -N/L	0.097	0.098	0.073	0.076	0.086	0.091
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> <sup>-</sup> -N/L	0.39	0.38	0.25	0.26	0.31	0.31
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	0.03	0.03	0.03	0.03	0.03	0.03
Total Phosphorous (TP), mg-P/L	0.07	0.07	0.06	0.06	0.07	0.07
Cadmium (Cd), µg/L	0.2	0.2	0.3	0.3	0.4	0.4
Chromium (Cr), µg/L	2.2	2.2	2.4	2.3	1.8	2.0
Copper (Cu), µg/L	5.2	5.2	5.6	5.5	7.8	7.8
Mercury (Hg), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Nickel (Ni), µg/L	3.0	3.0	2.8	2.7	1.1	1.0
Lead (Pb), µg/L	0.7	0.7	1.1	1.1	0.6	0.6
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	0.2	0.2
Zinc (Zn), µg/L	14.3	14.7	20.3	20.3	8.1	7.9

Remarks: 1) < = less than

2) S = Surface, M = Middle, B = Bottom

3) This report supersedes the one dated on 2014-09-11 with certificate number 20860

\*\*\*\*\*END OF REPORT\*\*\*\*\*

---

---

**APPENDIX C2**  
**LABORATORY TESTING REPORT**  
**FOR ODOUR SAMPLING**

---

---

**For Cinotech Consultant Limited**

# **Odour Sampling and Olfactometry Measurement for Kai Tak Development**

1<sup>st</sup> September 2014

By Odour Research Laboratory  
Department of Civil & Environmental Engineering  
The Hong Kong Polytechnic University

On behalf of  
PolyU Technology & Consultancy Co. Ltd.

## 1. Background

A service to collect odour samples within the boundary of Kai Tak Approach Channel (KTAC) and Kwun Tong Typhoon Shelter (KTTS) at Kai Tak and then to conduct olfactometry measurement at PolyU to determine odour concentration was required by Cinotech Consultant Limited.

## 2. Scope of the Work


The scope of the work includes:

- To collect a blank sample for quality control
- To collect a total of 13 odour samples from 13 sampling locations identified by the client and to deliver the collected odour samples to the Odour Laboratory of PolyU for analysis;
- To analyze and determine the odour concentration of 13 odour samples by olfactometry measurement at the Odour Laboratory of PolyU;
- To prepare a report.

## 3. Methodology


### 3.1. Odour Sampling

Odour gaseous sample is collected by using an odour sampling system, which includes a battery-operated air pump, a sampling vessel, and an odour bag as shown below. During air sampling, an empty sample bag is placed in the vessel, a rigid plastic container, and the container is then evacuated at a controlled rate and the bag is filled with foul gas. About 60 L of foul gas is collected for each sample.

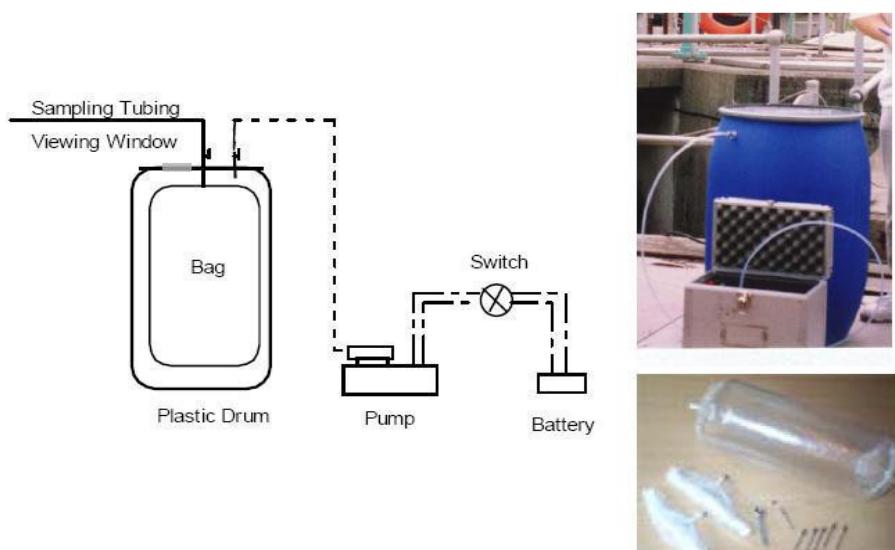

### 3.2 Odour Measurement by Olfactometry

Odour concentration is determined by a Forced-choice Dynamic Olfactometer (Olfactomat-n2) in accordance with the European Standard Method (EN13725).

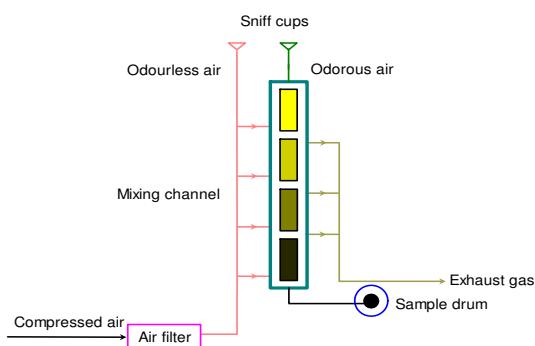

A force-choice olfactometer



Olfactometer in PolyU (Olfactomat-n2)

This European Standard specifies a method for the objective determinations of the odour concentration of a gaseous sample using dynamic olfactometry with human assessors. This European Standard is applicable to the measurement of odour concentration of pure substances, defined mixtures and undefined mixtures of gaseous odorants in air or nitrogen, using dynamic olfactometry with a panel of human assessors being the sensor. The unit of measurement is the odour unit per cubic metre: ou/m<sup>3</sup>. The odour concentration is measured by determining the dilution factor required to reach the detection threshold. The odour concentration at the detection threshold is 1 ou/m<sup>3</sup>. The odour concentration is then expressed in terms of multiples of the detection threshold. The range of measurement including pre-dilution prior to the olfactometry analysis is typically from 10<sup>1</sup> ou/m<sup>3</sup> to 10<sup>7</sup> ou/m<sup>3</sup>.

### 4. On-site Sampling


4.1 Thirteen sampling locations with relevant sampling methods are summarized in Table 1 and also clearly marked in figure 1.


Table 1: Monitoring locations at the boundary of KTAC and KTTS


Location ID	Location description	Sampling method
SA1	Northern KTAC, in the vicinity of Kai Tak Nullah (KTN)	Sampling at seawater surface
SA2	Northern KTAC	Sampling at seawater surface
SA3	Northern KTAC, in the vicinity of Jordan Valley Culvert (JVC) Outfall	Sampling at seawater surface
SA4	Southern KTAC	Sampling at seawater surface
SA5	Southern KTAC	Sampling at seawater surface
SA6	Southern KTAC	Sampling at seawater surface
SA7	KTTS	Sampling at seawater surface
SA8	KTTS	Sampling at seawater surface

<b>Location ID</b>	<b>Location description</b>	<b>Sampling method</b>
SA9	KTTS	Sampling at seawater surface
SA10	Kowloon Bay (between runway opening and TKWTS)	Sampling at seawater surface
SA11	MTK waterfront, at the end of Ma Tau Kok Road	Sampling at seawater surface
SA12	TKW waterfront, near Vehicle Examination Centre	Sampling at seawater surface
SA13	Hoi Sham Park waterfront	Sampling at seawater surface

- 4.2 The odour sampling works were conducted on 22<sup>nd</sup> August 2014. While one odour sample at each location was collected at location SA1, SA2, SA3, SA4, SA5, SA6, SA7, SA8, SA9, SA10, SA11, SA12 and SA13. A total of 13 odour samples were collected on the site and delivered to the Odour Laboratory of PolyU immediately.
- 4.3 During the odour sampling, relevant weather conditions including ambient temperature, relative humidity, wind speed, and wind direction were recorded on the sites for references.
- 4.4 Some photos about the on-site sampling activities at the 13 locations are presented below.

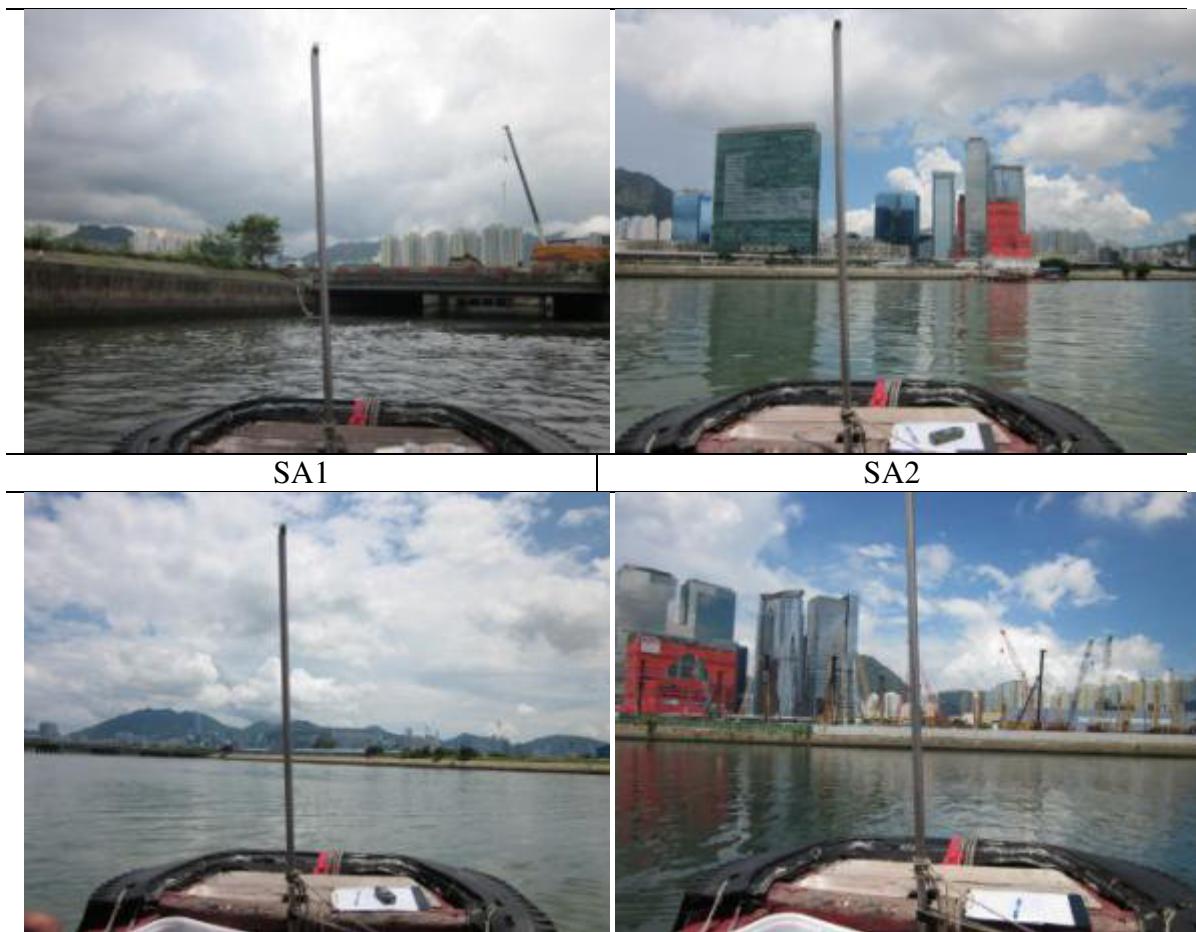

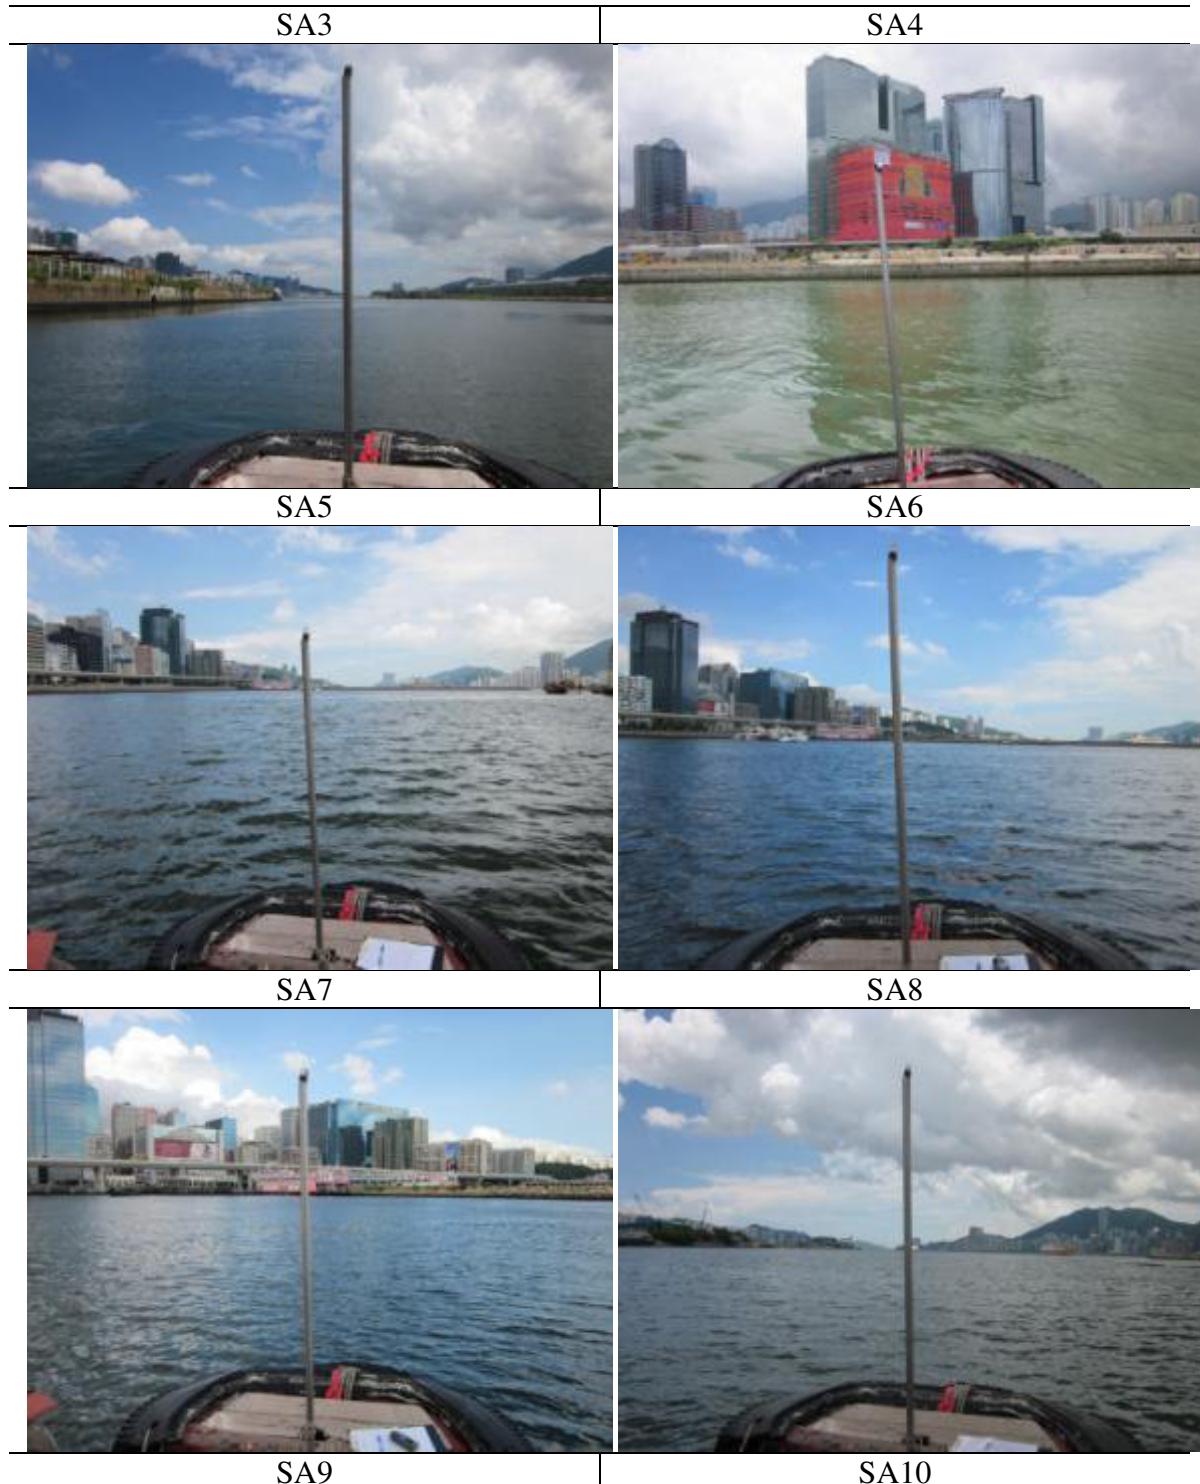

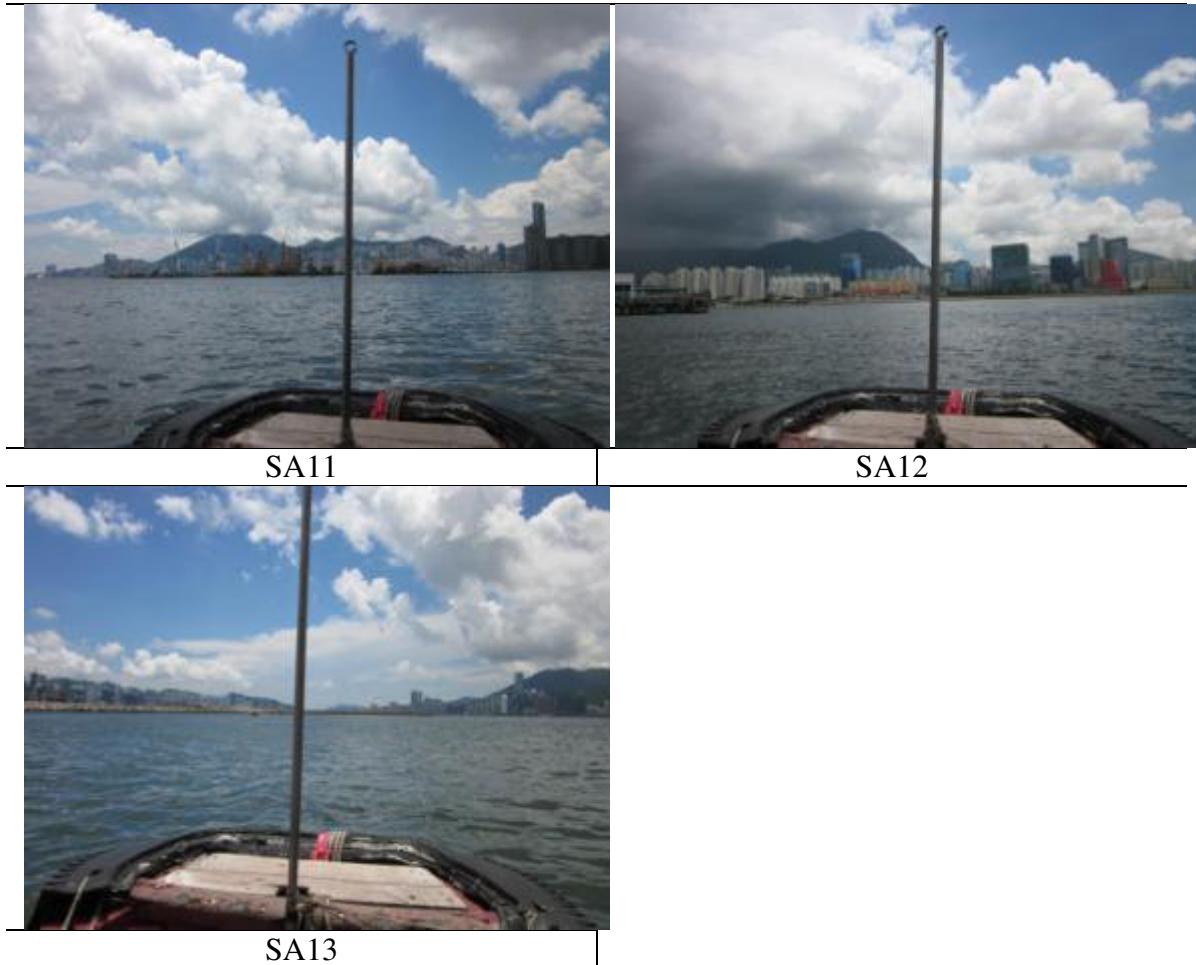

## 5. Laboratory Analysis

5.1 A total of 13 odour samples were transported to the Odour Laboratory of PolyU immediately after the sampling for olfactometry analysis using a forced-choice dynamic olfactometer within hours in accordance with the European Standard Method (EN 13725). Five qualified panelists participated in the odour testing session, which were previously selected through a screening testing by using a 48ppm of certified n-butanol gas as a standard reference.

5.2 From the odour concentrations determined by olfactometry, the specific emission rates (SOER) at 13 locations were calculated by the following equation and the final results are shown in Table 2:

$$\text{SOER(ou/m}^2/\text{s}) = \frac{\text{Odour concentration(ou/m}^3) \times \text{Air flow rate inside hood(m}^3/\text{s})}{\text{Covered surface area(m}^2)}$$

Where air flow rate inside hood =  $0.01 \text{ m/s (flow velocity)} \times 0.4\text{m(W)} \times 0.1\text{m(H)} = 0.0004 \text{ m}^3/\text{s}$ , and covered surface area=  $0.8\text{m(L)} \times 0.4\text{m(W)} = 0.32\text{m}^2$

## 6. Analytical Results

The results of odour concentrations are summarized in Table 2:

Table 2: Summary of analytical results

Location ID	Date	Time	AT (°C)	WS (m/s)	WD	RH (%)	OC (ou/m <sup>3</sup> )	SOER (ou/m <sup>2</sup> /s)
SA1	22/08/2014	12:50	30.1	2.0	NE	81.1	106	0.13
SA2	22/08/2014	13:08	31.3	1.1	SE	78.3	28	0.04
SA3	22/08/2014	13:15	32.2	0.4	S	71.1	35	0.04
SA4	22/08/2014	13:23	34.2	0.2	E	60.1	<10	<0.01
SA5	22/08/2014	13:28	32.2	1.6	SE	73.6	<10	<0.01
SA6	22/08/2014	13:34	28.8	3.4	SE	80.1	18	0.02
SA7	22/08/2014	13:43	29.1	4.5	SE	87.6	<10	<0.01
SA8	22/08/2014	13:49	29.2	3.8	SE	76.7	<10	<0.01
SA9	22/08/2014	13:57	29.3	4.2	SE	86.1	<10	<0.01
SA10	22/08/2014	12:10	29.2	2.1	SE	82.5	<10	<0.01
SA11	22/08/2014	11:19	28.2	2.2	SE	91.1	11	0.01
SA12	22/08/2014	11:30	29.3	1.1	E	84.2	<10	<0.01
SA13	22/08/2014	11:52	28.5	2.8	SE	85.5	<10	<0.01


Remark: Time: Sampling time; At: Air temperature; RH: Relative humidity; WD Wind direction; WS: Wind speed; OC: odour concentration; SOER: Specific odour emission rate

Signed:



Prepared by: Professor S. C. LEE

Figure 1: Locations of odour sampling at the boundary of KTAC & KTTS

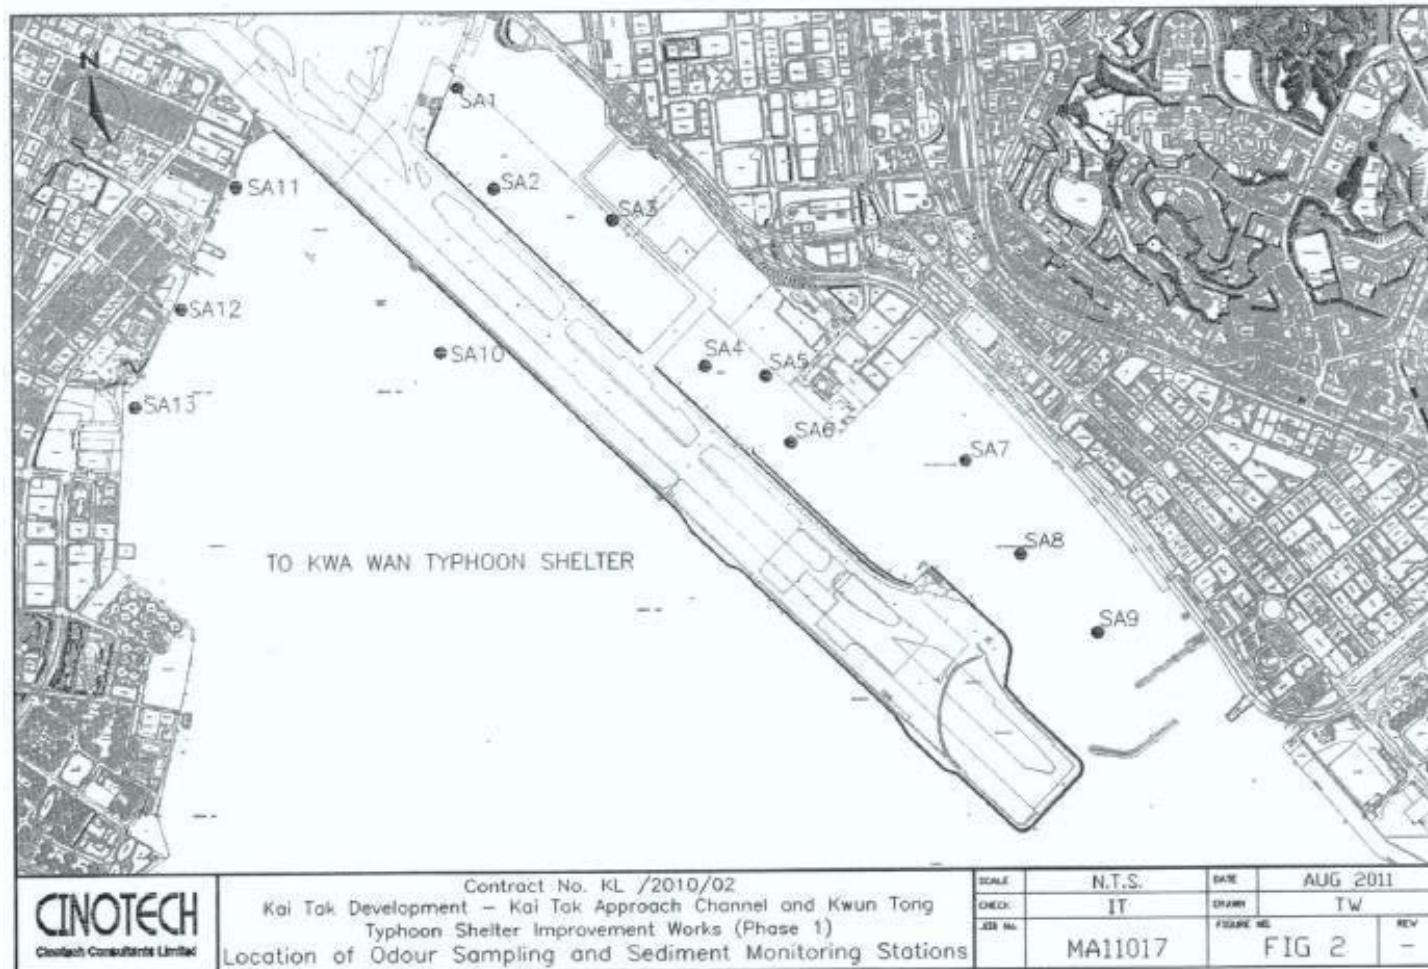

---

---

**APPENDIX C3**  
**LABORATORY TESTING REPORT**  
**FOR SEDIMENT MONITORING**

---

---

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Laboratory No.:	20997
Date of Issue:	2014-09-11
Date Received:	2014-08-30
Date Tested:	2014-08-30
Date Completed:	2014-09-11

**ATTN:** Miss Mei Ling Tang

Page: 1 of 2

**Sample Description :** 13 samples as received by customer said to be vibrocore

Project No. : MA11017

Project Name: Contract No. KL/2010/02

Kai Tak Development – Kai Tak Approach Channel  
& Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Custody No. : MA11017/140830

Sampling Date: 2014-08-30

### Test Requested & Methodology:

Item	Parameters	Ref. Method	Limit of Reporting
1	Acid volatile sulphide	EPA 821/R-91-100	2 mg/kg
2	Redox	Instrumental, pH/Redox Meter (electrodemetric)	1 mV
3	pH		pH 2.0 – 12.0
4	Residual Nitrate	In-house method SOP056 (FIA)	0.05 mg NO <sub>3</sub> <sup>-</sup> -N/L <sup>3</sup>

\*\*\*\*\*

*Prepared and Checked By:  
For and On Behalf of WELLAB Ltd.*

*P. Tse*  
PATRICK TSE  
Laboratory Manager

## TEST REPORT

Laboratory No.:	20997
Date of Issue:	2014-09-11
Date Received:	2014-08-30
Date Tested:	2014-08-30
Date Completed:	2014-09-11

Page: 2 of 2

### Results:

Sample ID	Sample Number	Acid volatile sulphide (mg/kg) <sup>2</sup>	Redox (mV)	pH (pH unit)	Residual Nitrate (mg NO <sub>3</sub> <sup>-</sup> -N/L) <sup>3</sup>
SA1	20997-1	430	-270	7.4	0.071
SA2	20997-2	2,800	-260	7.0	0.09
SA3	20997-3	6	-310	7.2	310
SA4	20997-4	22	-270	7.4	120
SA5	20997-5	540	-230	7.4	3.3
SA6	20997-6	8	-290	7.4	250
SA7	20997-7	25	-290	7.8	270
SA8	20997-8	<2	-180	7.7	570
SA9	20997-9	7	-160	7.6	0.07
SA10	20997-10	58	-160	7.6	0.522
SA11	20997-11	350	-210	7.9	0.06
SA12	20997-12	330	-270	7.9	0.11
SA13	20997-13	680	-310	7.8	0.07

Remarks: 1) < = less than

2) Results reported as dry weight basis

3) Results reported in terms of L of wet sediment

\*\*\*\*\*END OF REPORT\*\*\*\*\*

---

---

**APPENDIX D1**  
**QUALITY CONTROL REPORT FOR**  
**WATER QUALITY MONITORING**

---

---

## TEST REPORT

APPLICANT: Cinotech Consultants Limited  
RM 1710, Technology Park,  
18 On Lai Street,  
Shatin, N.T., Hong Kong

Laboratory No.:	QC20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

ATTN: Miss Mei Ling Tang  
QC report:  
Method Blank

Page: 1 of 8

Parameter	Method Blank 1	Method Blank 2	Method Blank 3	Method Blank 4	Method Blank 5	Acceptance
Suspended Solids (SS), mg/L	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
E. coli, cfu/100mL	<1	<1	<1	<1	<1	<1
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	N/A	N/A	N/A	N/A	N/A	N/A
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Unionized Ammonia (UIA), mg/L	N/A	N/A	N/A	N/A	N/A	N/A
Total Kjeldahl Nitrogen (TKN), mg N/L	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> -N/L	<0.002	<0.002	<0.002	<0.002	<0.002	<0.002
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> -N/L	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Ortho-phosphate (PO <sub>4</sub> <sup>3-</sup> -P/L)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Total Phosphorous (TP), mg-P/L	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Cadmium (Cd), µg/L	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Chromium (Cr), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Copper (Cu), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Mercury (Hg), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Nickel (Ni), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Lead (Pb), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4

Remarks: 1) < = less than

2) N/A = Not applicable

3) This report is the summary of quality control data for report number 20860

4) This report supersedes the one dated on 2014-09-11 with certificate number QC20860

\*\*\*\*\*  
*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**

*Ronak Tse*  
**PATRICK TSE**  
Laboratory Manager

## TEST REPORT

Laboratory No.:	QC20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11
Page:	2 of 8

QC report:

Method Blank

Parameter	Method Blank 6	Method Blank 7	Method Blank 8	Method Blank 9	Acceptance
Suspended Solids (SS), mg/L	<0.5	<0.5	<0.5	<0.5	<0.5
<i>E. coli</i> , cfu/100mL	<1	<1	<1	<1	<1
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	N/A	N/A	N/A	N/A	N/A
Ammonia Nitrogen (NH <sub>3</sub> -N), mg NH <sub>3</sub> -N/L	<0.01	<0.01	<0.01	<0.01	<0.01
Unionized Ammonia (UIA), mg/L	N/A	N/A	N/A	N/A	N/A
Total Kjeldahl Nitrogen (TKN), mg N/L	<0.1	<0.1	<0.1	<0.1	<0.1
Nitrite-nitrogen (NO <sub>2</sub> -N), mg NO <sub>2</sub> -N/L	<0.002	<0.002	<0.002	<0.002	<0.002
Nitrate-nitrogen (NO <sub>3</sub> -N), mg NO <sub>3</sub> -N/L	<0.01	<0.01	<0.01	<0.01	<0.01
Ortho-phosphate (PO <sub>4</sub> ), mg PO <sub>4</sub> <sup>3-</sup> -P/L	<0.01	<0.01	<0.01	<0.01	<0.01
Total Phosphorous (TP), mg-P/L	<0.01	<0.01	<0.01	<0.01	<0.01
Cadmium (Cd), µg/L	<0.1	<0.1	<0.1	<0.1	<0.1
Chromium (Cr), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2
Copper (Cu), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2
Mercury (Hg), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2
Nickel (Ni), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2
Lead (Pb), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2
Silver (Ag), µg/L	<0.2	<0.2	<0.2	<0.2	<0.2
Zinc (Zn), µg/L	<0.4	<0.4	<0.4	<0.4	<0.4

Remarks: 1) < = less than

2) N/A = Not applicable

3) This report is the summary of quality control data for report number 20860

4) This report supersedes the one dated on 2014-09-11 with certificate number QC20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	QC20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11
Page:	3 of 8

**QC report:**

**Method QC**

Parameter	MQC1	MQC2	MQC3	MQC4	MQC5	Acceptance
Suspended Solids (SS), %	100	98	99	103	101	80-120
<i>E. coli</i>	N/A	N/A	N/A	N/A	N/A	N/A
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	198	197	190	198	195	170-220
Ammonia Nitrogen (NH <sub>3</sub> -N), %	103	99	105	102	96	80-120
Unionized Ammonia (UIA)	95	99	100	93	101	N/A
Total Kjeldahl Nitrogen (TKN), %	100	99	97	96	100	80-120
Nitrite-nitrogen (NO <sub>2</sub> -N), %	98	95	97	100	104	80-120
Nitrate-nitrogen (NO <sub>3</sub> -N), %	98	100	99	101	95	80-120
Ortho-phosphate (PO <sub>4</sub> ), %	95	100	97	93	95	80-120
Total Phosphorous (TP), %	99	99	102	98	99	80-120
Cadmium (Cd), %	94	101	98	99	93	80-120
Chromium (Cr), %	98	104	91	100	99	80-120
Copper (Cu), %	97	105	100	97	99	80-120
Mercury (Hg), %	98	97	96	101	103	80-120
Nickel (Ni), %	102	99	104	97	95	80-120
Lead (Pb), %	91	99	98	98	100	80-120
Silver (Ag), %	96	99	105	99	99	80-120
Zinc (Zn), %	98	96	101	92	99	80-120

Remarks: 1) <= less than

2) N/A = Not applicable

3) This report is the summary of quality control data for report number 20860

4) This report supersedes the one dated on 2014-09-11 with certificate number QC20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	QC20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11
Page:	4 of 8

QC report:

Method QC

Parameter	MQC 6	MQC 7	MQC 8	MQC 9	Acceptance
Suspended Solids (SS), %	99	98	102	99	80-120
<i>E. coli</i>	N/A	N/A	N/A	N/A	N/A
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> ), mg-O <sub>2</sub> /L	195	192	194	197	170-220
Ammonia Nitrogen (NH <sub>3</sub> -N), %	96	97	95	102	80-120
Unionized Ammonia (UIA)	98	93	101	91	N/A
Total Kjeldahl Nitrogen (TKN), %	91	99	92	90	80-120
Nitrite-nitrogen (NO <sub>2</sub> -N), %	100	95	99	100	80-120
Nitrate-nitrogen (NO <sub>3</sub> -N), %	95	98	91	89	80-120
Ortho-phosphate (PO <sub>4</sub> ), %	99	100	102	98	80-120
Total Phosphorous (TP), %	94	91	97	92	80-120
Cadmium (Cd), %	94	99	95	92	80-120
Chromium (Cr), %	97	96	92	98	80-120
Copper (Cu), %	94	97	93	95	80-120
Mercury (Hg), %	96	97	92	90	80-120
Nickel (Ni), %	90	94	91	89	80-120
Lead (Pb), %	94	94	102	98	80-120
Silver (Ag), %	99	95	93	89	80-120
Zinc (Zn), %	97	95	92	91	80-120

Remarks: 1) <= less than

2) N/A = Not applicable

3) This report is the summary of quality control data for report number 20860

4) This report supersedes the one dated on 2014-09-11 with certificate number QC20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	QC20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 5 of 8

**QC report:**  
**Sample Spike**

Parameter	20860-1 spk	20860-28 spk	20860-51 spk	20860-78 spk	20860-101 spk	Acceptance
Suspended Solids (SS)	N/A	N/A	N/A	N/A	N/A	N/A
<i>E. coli</i>	N/A	N/A	N/A	N/A	N/A	N/A
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> )	N/A	N/A	N/A	N/A	N/A	N/A
Ammonia Nitrogen (NH <sub>3</sub> -N), %	99	93	96	101	95	80-120
Unionized Ammonia (UIA)	N/A	N/A	N/A	N/A	N/A	N/A
Total Kjeldahl Nitrogen (TKN), %	90	97	96	96	92	80-120
Nitrite-nitrogen (NO <sub>2</sub> -N), %	93	95	100	101	98	80-120
Nitrate-nitrogen (NO <sub>3</sub> -N), %	98	91	94	93	94	80-120
Ortho-phosphate (PO <sub>4</sub> ), %	102	97	97	101	94	80-120
Total Phosphorous (TP), %	96	91	90	91	95	80-120
Cadmium (Cd), %	94	95	96	89	90	80-120
Chromium (Cr), %	93	96	94	95	91	80-120
Copper (Cu), %	89	95	93	91	88	80-120
Mercury (Hg), %	96	94	99	94	98	80-120
Nickel (Ni), %	94	97	94	95	90	80-120
Lead (Pb), %	96	92	99	95	98	80-120
Silver (Ag), %	94	94	91	90	89	80-120
Zinc (Zn), %	96	95	97	97	95	80-120

Remarks: 1) <= less than

2) N/A = Not applicable

3) This report is the summary of quality control data for report number 20860

4) This report supersedes the one dated on 2014-09-11 with certificate number QC20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	QC20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11
Page:	6 of 8

QC report:  
Sample Spike

Parameter	20860-128 spk	20860-150 spk	20860-178 spk	20860-198 spk	Acceptance
Suspended Solids (SS)	N/A	N/A	N/A	N/A	N/A
<i>E. coli</i>	N/A	N/A	N/A	N/A	N/A
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> )	N/A	N/A	N/A	N/A	N/A
Ammonia Nitrogen (NH <sub>3</sub> -N), %	93	95	101	100	80-120
Unionized Ammonia (UIA)	N/A	N/A	N/A	N/A	N/A
Total Kjeldahl Nitrogen (TKN), %	96	89	95	91	80-120
Nitrite-nitrogen (NO <sub>2</sub> -N), %	94	97	92	94	80-120
Nitrate-nitrogen (NO <sub>3</sub> -N), %	98	90	94	92	80-120
Ortho-phosphate (PO <sub>4</sub> ), %	90	97	92	94	80-120
Total Phosphorous (TP), %	90	96	99	95	80-120
Cadmium (Cd), %	98	93	89	102	80-120
Chromium (Cr), %	90	99	94	90	80-120
Copper (Cu), %	95	95	95	97	80-120
Mercury (Hg), %	98	95	89	91	80-120
Nickel (Ni), %	95	96	95	94	80-120
Lead (Pb), %	95	92	90	90	80-120
Silver (Ag), %	98	96	98	89	80-120
Zinc (Zn), %	91	94	96	98	80-120

Remarks: 1) <= less than

2) N/A = Not applicable

3) This report is the summary of quality control data for report number 20860

4) This report supersedes the one dated on 2014-09-11 with certificate number QC20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	QC20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11

Page: 7 of 8

**QC report:  
Sample Duplicate**

Parameter	20860-27 chk	20860-50 chk	20860-77 chk	20860-100 chk	20860-127 chk	Acceptance
Suspended Solids (SS)	3	3	3	3	3	RPD≤20
<i>E. coli</i>	N/A	N/A	N/A	N/A	N/A	N/A
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> )	N/A	N/A	N/A	N/A	N/A	RPD≤20
Ammonia Nitrogen (NH <sub>3</sub> -N), %	5	5	3	4	3	RPD≤20
Unionized Ammonia (UIA)	N/A	N/A	N/A	N/A	N/A	N/A
Total Kjeldahl Nitrogen (TKN), %	4	4	5	4	4	RPD≤20
Nitrite-nitrogen (NO <sub>2</sub> -N), %	4	4	6	4	8	RPD≤20
Nitrate-nitrogen (NO <sub>3</sub> -N), %	4	3	4	4	4	RPD≤20
Ortho-phosphate (PO <sub>4</sub> ), %	7	5	5	3	7	RPD≤20
Total Phosphorous (TP), %	4	4	4	4	3	RPD≤20
Cadmium (Cd), %	7	N/A	5	3	5	RPD≤20
Chromium (Cr), %	5	6	4	3	4	RPD≤20
Copper (Cu), %	5	4	6	3	4	RPD≤20
Mercury (Hg), %	N/A	N/A	N/A	3	5	RPD≤20
Nickel (Ni), %	7	3	5	4	4	RPD≤20
Lead (Pb), %	4	5	4	4	6	RPD≤20
Silver (Ag), %	5	N/A	N/A	N/A	N/A	RPD≤20
Zinc (Zn), %	4	5	6	3	4	RPD≤20

Remarks: 1) < = less than

2) N/A = Not applicable

3) This report is the summary of quality control data for report number 20860

4) This report supersedes the one dated on 2014-09-11 with certificate number QC20860

\*\*\*\*\*

## TEST REPORT

Laboratory No.:	QC20860-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-18
Date Tested:	2014-08-18
Date Completed:	2014-09-11
Page:	8 of 8

**QC report:**  
**Sample Duplicate**

Parameter	20860-148 chk	20860-177 chk	20860-197 chk	20860-208 chk	Acceptance
Suspended Solids (SS)	4	4	3	3	RPD≤20
<i>E. coli</i>	N/A	N/A	N/A	N/A	N/A
5-day Biochemical Oxygen Demand (BOD <sub>5</sub> )	N/A	N/A	N/A	N/A	RPD≤20
Ammonia Nitrogen (NH <sub>3</sub> -N), %	3	3	4	3	RPD≤20
Unionized Ammonia (UIA)	N/A	N/A	N/A	N/A	N/A
Total Kjeldahl Nitrogen (TKN), %	5	5	N/A	3	RPD≤20
Nitrite-nitrogen (NO <sub>2</sub> -N), %	6	7	5	4	RPD≤20
Nitrate-nitrogen (NO <sub>3</sub> -N), %	6	4	3	6	RPD≤20
Ortho-phosphate (PO <sub>4</sub> ), %	5	6	5	4	RPD≤20
Total Phosphorous (TP), %	5	6	6	5	RPD≤20
Cadmium (Cd), %	N/A	4	5	4	RPD≤20
Chromium (Cr), %	4	3	4	5	RPD≤20
Copper (Cu), %	6	4	5	3	RPD≤20
Mercury (Hg), %	4	N/A	5	N/A	RPD≤20
Nickel (Ni), %	4	5	5	3	RPD≤20
Lead (Pb), %	4	6	6	6	RPD≤20
Silver (Ag), %	N/A	N/A	N/A	4	RPD≤20
Zinc (Zn), %	4	6	5	5	RPD≤20

Remarks: 1) <= less than

2) N/A = Not applicable

3) This report is the summary of quality control data for report number 20860

4) This report supersedes the one dated on 2014-09-11 with certificate number QC20860

\*\*\*\*\*END OF REPORT\*\*\*\*\*

---

---

**APPENDIX D2**  
**QUALITY CONTROL REPORT FOR**  
**SEDIMENT MONITORING**

---

---

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
 RM 1710, Technology Park,  
 18 On Lai Street,  
 Shatin, N.T., Hong Kong

Laboratory No.:	QC20997-V1
Date of Issue:	2014-10-15
Date Received:	2014-08-30
Date Tested:	2014-08-30
Date Completed:	2014-09-11

**ATTN:** Miss Mei Ling Tang

**Page:** 1 of 1

**QC report:**

**Method Blank**

Parameter	Method Blank 1	Method Blank 2	Acceptance
Acid volatile sulphide, mg/L	<0.016	<0.016	<0.016
Redox, mV	N/A	N/A	N/A
pH, pH unit	N/A	N/A	N/A
Residual Nitrate, mg NO <sub>3</sub> <sup>-</sup> -N/L	<0.01	<0.01	<0.01

**Method QC**

Parameter	MQC 1	MQC 2	Acceptance
Acid volatile sulphide, %	92	92	80-120
Redox, %	N/A	N/A	N/A
pH, %	N/A	N/A	N/A
Residual Nitrate, %	99	99	80-120

**Sample Spike**

Parameter	20997-10 spk	20997-13 spk	Acceptance
Acid volatile sulphide, %	94	89	80-120
Redox, %	N/A	N/A	N/A
pH, %	N/A	N/A	N/A
Residual Nitrate, %	102	101	80-120

**Sample Duplicate**

Parameter	20997-10 chk	20997-13 chk	Acceptance
Acid volatile sulphide, %	2	9	RPD $\leq$ 20
Redox, %	N/A	N/A	N/A
pH, %	N/A	N/A	N/A
Residual Nitrate, %	1	1	RPD $\leq$ 20

Remarks: 1)  $\leq$  less than

2) N/A = Not applicable

3) This report is the summary of quality control data for report number 20997

4) This report supersedes the one dated on 2014-09-11 with certificate number QC20997

\*\*\*\*\*END OF REPORT\*\*\*\*\*

**PREPARED AND CHECKED BY:**

For and On Behalf of WELLAB Ltd.

MOSES TSE  
 Technical Manager

---

---

**APPENDIX E1**  
**IN-SITU MEASUREMENT RESULTS**  
**FOR MARINE WATER QUALITY**  
**MONITORING**

---

---

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

**Water Quality Monitoring Results at AC1 - Mid-Ebb Tide**



**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	18:45	28.7	8.4	25.4	113.0	7.6	5.0
			18:47	28.5	8.4	26.5	114.2	7.7	5.1
1.0	Fine	Calm	18:45	28.0	8.3	27.9	118.5	8.0	3.6
			18:48	27.5	8.3	28.7	122.5	8.2	3.6
1.5	Fine	Calm	18:46	27.3	8.1	29.2	121.1	8.2	3.2
			18:48	26.8	8.1	29.6	113.9	7.7	3.1
2.0	Fine	Calm	18:46	26.4	7.9	30.2	95.7	6.5	2.9
			18:48	26.5	8.0	30.2	97.8	6.6	3.1
2.5	Fine	Calm	18:46	25.8	7.8	30.8	73.6	5.0	4.1
			18:48	25.9	7.8	30.8	74.2	5.1	3.4
3.0	Fine	Calm	18:47	25.7	7.8	31.1	48.5	3.3	5.2
			18:48	25.7	7.6	31.0	48.7	3.3	5.2

**Water Quality Monitoring Results (Sampling Depth)**

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	18:45	28.0	8.3	27.9	118.5	8.0	3.6
			18:48	27.5	8.3	28.7	122.5	8.2	3.6
2.5	Fine	Calm	18:46	25.8	7.8	30.8	73.6	5.0	4.1
			18:48	25.9	7.8	30.8	74.2	5.1	3.4

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

**Water Quality Monitoring Results at AC2 - Mid-Ebb Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	18:53	28.1	8.4	28.0	129.4	8.7	4.2
			18:55	29.1	8.3	24.7	113.9	7.6	4.3
1.0	Fine	Calm	18:53	27.8	8.3	28.4	127.3	8.5	3.3
			18:55	28.1	8.2	28.4	111.0	7.4	4.0
1.5	Fine	Calm	18:53	27.3	8.1	29.1	126.3	8.5	3.2
			18:55	27.4	8.1	29.1	112.1	7.5	3.5
2.0	Fine	Calm	18:53	26.6	8.0	30.0	101.2	6.9	3.1
			18:55	26.8	8.0	29.9	101.1	6.8	2.6
2.5	Fine	Calm	18:54	26.3	7.9	30.3	94.9	6.5	2.1
			18:55	26.4	7.9	30.3	87.7	6.0	2.2
3.0	Fine	Calm	18:54	26.0	7.6	30.7	80.5	5.5	5.2
			18:55	26.0	7.3	30.7	81.7	5.6	5.2
3.5	Fine	Calm	18:54	25.6	7.0	31.2	72.7	5.0	6.6
			18:55	25.5	7.0	31.5	65.8	4.5	6.1

**Water Quality Monitoring Results (Sampling Depth)**

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	18:53	27.8	8.3	28.4	127.3	8.5	3.3
			18:55	28.1	8.2	28.4	111.0	7.4	4.0
3.0	Fine	Calm	18:54	26.0	7.6	30.7	80.5	5.5	5.2
			18:55	26.0	7.3	30.7	81.7	5.6	5.2

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

**Water Quality Monitoring Results at AC3 - Mid-Ebb Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	18:36	28.3	8.4	26.7	114.3	7.7	4.5
			18:39	28.8	8.4	26.3	120.0	8.0	4.6
1.0	Fine	Calm	18:37	27.2	8.2	28.9	117.1	7.9	4.2
			18:39	27.2	8.2	29.3	123.8	8.3	4.3
1.5	Fine	Calm	18:37	26.8	8.1	29.9	116.5	7.9	3.7
			18:39	26.5	8.1	30.0	123.6	8.4	3.8
2.0	Fine	Calm	18:37	26.0	7.9	30.5	110.3	7.5	2.8
			18:39	26.3	8.0	30.4	106.9	7.3	3.0
2.5	Fine	Calm	18:37	25.9	7.9	30.7	75.1	5.1	2.8
			18:39	26.0	7.9	30.7	76.8	5.2	2.3
3.0	Fine	Calm	18:37	25.5	7.5	31.2	64.0	4.4	5.0
			18:39	25.7	7.7	31.0	61.3	4.2	5.1
3.5	Fine	Calm	18:38	25.4	7.0	31.6	40.4	2.8	8.2
			18:40	25.3	7.1	31.6	43.2	3.0	8.1

**Water Quality Monitoring Results (Sampling Depth)**

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	18:37	27.2	8.2	28.9	117.1	7.9	4.2
			18:39	27.2	8.2	29.3	123.8	8.3	4.3
3.0	Fine	Calm	18:37	25.5	7.5	31.2	64.0	4.4	5.0
			18:39	25.7	7.7	31.0	61.3	4.2	5.1

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at AC4 - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	19:02	29.3	8.5	24.1	124.2	8.3	3.7
			19:04	29.2	8.5	24.4	122.9	8.2	3.8
1.0	Fine	Calm	19:03	27.9	8.3	28.1	119.0	8.0	2.9
			19:04	27.3	8.2	28.9	117.8	7.9	2.9
1.5	Fine	Calm	19:03	27.3	8.1	29.1	107.9	7.3	2.6
			19:04	27.2	8.1	29.3	106.2	7.2	2.5
2.0	Fine	Calm	19:03	26.7	7.9	30.0	100.8	6.8	2.1
			19:04	26.4	7.9	30.4	102.3	7.0	2.1
2.5	Fine	Calm	19:03	26.3	7.9	30.5	93.5	6.4	2.1
			19:05	26.1	7.8	30.7	90.7	6.2	2.0
3.0	Fine	Calm	19:03	25.9	7.8	30.8	82.8	5.7	3.6
			19:05	25.7	7.7	31.1	76.1	5.2	3.5
3.5	Fine	Calm	19:03	25.5	7.1	31.5	66.7	4.6	4.9
			19:05	24.9	7.0	32.2	68.6	4.7	4.9
4.0	Fine	Calm	19:03	24.7	7.0	32.6	47.8	3.3	6.1
			19:05	24.6	7.0	32.7	45.6	3.2	6.8

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	19:03	27.9	8.3	28.1	119.0	8.0	2.9
			19:04	27.3	8.2	28.9	117.8	7.9	2.9
3.5	Fine	Calm	19:03	25.5	7.1	31.5	66.7	4.6	4.9
			19:05	24.9	7.0	32.2	68.6	4.7	4.9

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at AC5 - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	18:27	28.2	8.4	27.2	115.9	7.8	3.9
			18:29	28.8	8.4	25.4	117.5	7.9	4.0
1.0	Fine	Calm	18:27	27.7	8.3	28.2	108.4	7.3	3.5
			18:29	28.2	8.4	27.7	109.3	7.3	3.3
1.5	Fine	Calm	18:27	27.1	8.1	29.1	107.7	7.3	3.0
			18:29	27.2	8.1	28.9	110.5	7.5	3.1
2.0	Fine	Calm	18:28	28.2	7.8	30.0	111.4	7.6	2.5
			18:30	26.4	7.9	29.9	107.4	7.3	2.4
2.5	Fine	Calm	18:28	26.8	7.8	30.8	101.0	6.9	2.1
			18:30	26.0	7.8	30.6	100.2	6.8	2.6
3.0	Fine	Calm	18:28	25.7	7.7	30.9	69.8	4.8	3.6
			18:30	25.7	7.7	30.9	71.7	4.9	3.7
3.5	Fine	Calm	18:28	25.4	7.2	31.5	63.0	4.3	7.8
			18:30	25.3	6.8	31.9	66.8	4.6	7.9
4.0	Fine	Calm	18:28	24.9	6.9	30.4	40.5	2.8	5.7
			18:30	24.7	6.7	30.7	39.6	2.8	5.8

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	18:27	27.7	8.3	28.2	108.4	7.3	3.5
			18:29	28.2	8.4	27.7	109.3	7.3	3.3
3.5	Fine	Calm	18:28	25.4	7.2	31.5	63.0	4.3	7.8
			18:30	25.3	6.8	31.9	66.8	4.6	7.9

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

**Water Quality Monitoring Results at AC6 - Mid-Ebb Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	18:17	28.4	8.4	26.6	117.7	7.9	2.9
			18:19	28.4	8.4	25.1	111.8	7.6	3.0
1.0	Fine	Calm	18:17	27.8	8.3	28.2	107.7	7.2	3.2
			18:19	27.5	8.3	28.5	107.7	7.3	2.9
1.5	Fine	Calm	18:18	27.0	8.0	29.4	98.4	6.7	2.6
			18:20	26.8	8.1	29.6	97.3	6.6	2.6
2.0	Fine	Calm	18:18	26.4	7.9	30.1	93.6	6.4	2.2
			18:20	26.4	7.9	30.1	93.0	6.3	2.4
2.5	Fine	Calm	18:18	26.0	7.8	30.6	85.4	5.8	2.3
			18:20	26.1	7.9	30.5	88.3	6.0	2.6
3.0	Fine	Calm	18:18	25.7	7.7	30.9	81.0	5.6	5.2
			18:20	25.5	7.7	31.0	86.8	6.0	5.6
3.5	Fine	Calm	18:18	25.3	7.4	31.4	72.4	5.0	12.2
			18:20	25.2	7.2	31.6	69.4	4.8	12.9
4.0	Fine	Calm	18:18	25.1	7.2	31.7	48.3	3.3	14.8
			18:20	24.9	7.0	32.1	49.3	3.4	12.2

**Water Quality Monitoring Results (Sampling Depth)**

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	18:17	27.8	8.3	28.2	107.7	7.2	3.2
			18:19	27.5	8.3	28.5	107.7	7.3	2.9
3.5	Fine	Calm	18:18	25.3	7.4	31.4	72.4	5.0	12.2
			18:20	25.2	7.2	31.6	69.4	4.8	12.9

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

### Water Quality Monitoring Results at AC7 - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	18:07	28.3	8.4	26.8	126.1	8.5	5.5
			18:09	28.8	8.4	25.8	125.8	8.4	5.5
1.0	Fine	Calm	18:07	28.0	8.3	27.3	124.1	8.4	4.5
			18:09	27.8	8.2	27.6	126.6	8.5	4.5
1.5	Fine	Calm	18:07	27.3	8.1	28.4	109.1	7.4	2.8
			18:09	26.8	8.0	29.0	106.2	7.2	2.8
2.0	Fine	Calm	18:07	26.7	7.9	29.7	106.0	7.2	2.6
			18:10	26.4	7.9	29.8	103.9	7.1	2.7
2.5	Fine	Calm	18:08	26.1	7.8	30.3	86.0	5.9	2.3
			18:10	26.0	7.8	30.5	84.0	5.7	2.3
3.0	Fine	Calm	18:08	25.6	7.7	30.9	83.9	5.8	3.2
			18:10	25.7	7.7	30.8	83.2	5.7	3.2
3.5	Fine	Calm	18:08	25.3	7.4	31.3	81.9	5.6	7.4
			18:10	25.5	7.5	31.2	83.2	5.7	7.7
4.0	Fine	Calm	18:08	24.9	7.2	32.1	67.5	4.7	8.2
			18:10	24.9	7.1	32.0	72.1	5.0	8.5
4.5	Fine	Calm	18:08	24.2	7.3	32.8	64.7	4.5	7.9
			18:10	24.5	7.2	32.6	61.2	4.2	8.0
5.0	Fine	Calm	18:08	24.0	7.4	33.1	42.1	2.9	9.1
			18:10	24.1	7.4	33.1	45.4	3.2	9.4

### Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	18:07	28.0	8.3	27.3	124.1	8.4	4.5
			18:09	27.8	8.2	27.6	126.6	8.5	4.5
4.5	Fine	Calm	18:08	24.2	7.3	32.8	64.7	4.5	7.9
			18:10	24.5	7.2	32.6	61.2	4.2	8.0

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

**Water Quality Monitoring Results at JVC - Mid-Ebb Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	19:10	29.1	8.3	23.9	113.9	7.7	6.8
			19:11	28.5	8.4	27.0	114.1	7.6	6.7
1.0	Fine	Calm	19:10	27.7	8.3	28.5	113.1	7.6	6.3
			19:11	28.1	8.3	28.2	111.8	7.5	6.3
1.5	Fine	Calm	19:10	27.1	8.1	29.2	106.0	7.2	5.5
			19:12	27.2	8.1	29.3	106.5	7.2	5.6
2.0	Fine	Calm	19:10	26.8	8.0	29.8	98.3	6.7	4.7
			19:12	26.8	8.0	29.9	96.4	6.5	4.8
2.5	Fine	Calm	19:10	26.4	7.9	30.4	89.9	6.1	4.5
			19:12	26.2	7.9	30.6	88.5	6.0	4.5
3.0	Fine	Calm	19:10	26.0	7.4	30.8	81.5	5.6	4.2
			19:12	25.8	7.8	31.1	81.8	5.6	4.3
3.5	Fine	Calm	19:10	25.2	7.0	31.9	73.3	5.0	7.9
			19:12	25.3	7.0	31.8	74.8	5.1	7.8
4.0	Fine	Calm	19:11	24.7	6.8	32.5	70.8	4.9	2.0
			19:12	24.6	6.9	32.7	69.3	4.8	2.1

**Water Quality Monitoring Results (Sampling Depth)**

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	19:10	27.7	8.3	28.5	113.1	7.6	6.3
			19:11	28.1	8.3	28.2	111.8	7.5	6.3
3.5	Fine	Calm	19:10	25.2	7.0	31.9	73.3	5.0	7.9
			19:12	25.3	7.0	31.8	74.8	5.1	7.8

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at KT1 - Mid-Ebb Tide


Sampling Date: 18 August 2014

Secchi Disc Depth: 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	17:55	29.2	8.4	25.1	121.4	8.1	2.6
			17:58	27.8	8.1	27.9	122.2	8.2	2.7
1.0	Fine	Calm	17:55	27.5	8.2	28.2	107.7	7.3	2.5
			17:58	26.7	8.0	29.1	105.1	7.2	2.6
1.5	Fine	Calm	17:55	26.9	8.0	29.0	101.3	6.9	2.3
			17:58	26.5	7.9	29.3	98.9	6.7	2.4
2.0	Fine	Calm	17:56	26.4	7.8	29.6	100.7	6.9	2.0
			17:58	26.3	7.8	29.8	100.1	6.8	2.3
2.5	Fine	Calm	17:56	26.1	7.8	30.1	94.2	6.4	2.3
			17:58	25.9	7.8	30.4	91.0	6.2	2.4
3.0	Fine	Calm	17:56	25.8	7.7	30.4	90.0	6.2	2.5
			17:58	25.7	7.7	30.8	89.8	6.2	2.5
3.5	Fine	Calm	17:56	25.7	7.7	30.7	86.0	5.9	2.2
			17:58	25.4	7.6	31.2	84.5	5.8	2.2
4.0	Fine	Calm	17:56	25.4	7.6	31.1	77.6	5.3	6.8
			17:58	25.0	7.5	31.6	75.6	5.2	6.9
4.5	Fine	Calm	17:56	24.9	7.4	31.7	66.9	4.6	9.2
			17:58	24.3	7.4	32.4	68.0	4.7	9.4
5.0	Fine	Calm	17:56	24.4	7.4	32.4	58.9	4.1	7.2
			17:58	23.9	7.5	33.0	57.6	4.0	7.5
5.5	Fine	Calm	17:56	24.0	7.5	32.9	45.3	3.2	5.7
			17:58	23.7	7.5	33.3	46.4	3.2	5.8

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	17:56	27.5	8.2	28.2	107.7	7.3	2.5
			17:58	26.7	8.0	29.1	105.1	7.2	2.5
3.0	Fine	Calm	17:56	25.8	7.7	30.4	90.0	6.2	2.5
			17:58	25.7	7.7	30.8	89.8	6.2	2.5
5.0	Fine	Calm	17:56	24.4	7.4	32.4	58.9	4.1	7.2
			17:58	23.9	7.5	33.0	57.6	4.0	7.5

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

**Water Quality Monitoring Results at KTN - Mid-Ebb Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 0.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	19:42	29.1	7.7	27.7	105.7	7.0	6.7
			19:43	27.2	8.0	27.7	101.2	6.9	6.8

**Water Quality Monitoring Results (Sampling Depth)**

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	19:42	29.1	7.7	27.7	105.7	7.0	6.7
			19:43	27.2	8.0	27.7	101.2	6.9	6.8

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

### Water Quality Monitoring Results at IB1 - Mid-Ebb Tide

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	19:39	24.2	8.4	31.2	109.2	7.7	4.2
			19:45	24.2	8.4	31.2	109.6	7.7	4.2
1.0	Fine	Calm	19:39	24.1	8.4	31.3	108.6	7.6	4.2
			19:45	24.1	8.4	31.3	108.5	7.6	4.1
1.5	Fine	Calm	19:40	23.8	8.4	31.4	102.4	7.2	4.4
			19:46	23.8	8.4	31.4	102.0	7.2	4.4
2.0	Fine	Calm	19:40	23.8	8.4	31.4	100.7	7.1	4.3
			19:46	23.8	8.4	31.4	100.4	7.1	4.4
2.5	Fine	Calm	19:41	23.7	8.4	31.4	100.2	7.1	4.2
			19:47	23.8	8.4	31.4	100.1	7.1	4.3
3.0	Fine	Calm	19:41	23.7	8.4	31.5	99.9	7.1	4.0
			19:47	23.7	8.4	31.5	100.0	7.1	4.0
3.5	Fine	Calm	19:41	23.6	8.4	31.5	100.1	7.1	3.9
			19:48	23.7	8.4	31.5	100.0	7.1	3.9
4.0	Fine	Calm	19:42	23.5	8.4	31.5	99.2	7.0	3.8
			19:48	23.5	8.4	31.5	98.5	7.0	3.8
4.5	Fine	Calm	19:42	23.5	8.4	31.6	96.2	6.8	4.2
			19:48	23.5	8.4	31.6	95.7	6.8	4.2
5.0	Fine	Calm	19:43	23.2	8.4	31.8	83.9	6.0	4.9
			19:49	23.2	8.4	31.8	83.4	5.9	4.9
5.5	Fine	Calm	19:43	22.8	8.4	32.0	70.0	5.0	7.1
			19:50	22.8	8.4	31.9	68.9	4.9	6.9

### Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	19:39	24.1	8.4	31.3	108.6	7.6	4.2
			19:45	24.1	8.4	31.3	108.5	7.6	4.1
3.0	Fine	Calm	19:41	23.7	8.4	31.5	99.9	7.1	4.0
			19:47	23.7	8.4	31.5	100.0	7.1	4.0
5.0	Fine	Calm	19:43	23.2	8.4	31.8	83.9	6.0	4.9
			19:49	23.2	8.4	31.8	83.4	5.9	4.9

	Name	Signature	Date
Conducted by:	Lee Man Hei		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

#### Water Quality Monitoring Results at IB2 - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	19:08	23.9	8.6	31.3	107.5	7.6	3.9
			19:13	23.9	8.5	31.3	108.3	7.6	3.9
1.0	Fine	Calm	19:08	23.9	8.5	31.3	108.6	7.7	3.8
			19:14	23.9	8.5	31.3	108.3	7.6	3.7
1.5	Fine	Calm	19:09	23.7	8.6	31.4	106.0	7.5	3.8
			19:14	23.7	8.6	31.4	105.7	7.5	3.8
2.0	Fine	Calm	19:09	23.6	8.6	31.4	104.9	7.4	3.8
			19:15	23.7	8.6	31.4	104.5	7.4	3.8
2.5	Fine	Calm	19:19	23.6	8.6	31.4	104.0	7.4	3.9
			19:15	23.6	8.6	31.4	103.7	7.3	3.9
3.0	Fine	Calm	19:10	23.6	8.6	31.4	103.6	7.3	3.8
			19:15	23.6	8.6	31.4	103.4	7.3	3.8
3.5	Fine	Calm	19:10	23.6	8.6	31.5	101.9	7.2	3.7
			19:16	23.5	8.6	31.5	101.2	7.2	3.8
4.0	Fine	Calm	19:10	23.5	8.6	31.5	98.4	7.0	3.8
			19:16	23.5	8.6	31.5	98.0	7.0	3.8
4.5	Fine	Calm	19:10	23.4	8.6	31.6	94.8	6.7	3.8
			19:17	23.4	8.6	31.5	94.2	6.7	3.8
5.0	Fine	Calm	19:11	23.1	8.6	31.8	90.5	6.5	4.3
			19:17	23.1	8.6	31.8	89.4	6.4	4.3
5.5	Fine	Calm	19:11	22.7	8.6	32.3	78.0	5.6	5.4
			19:18	22.6	8.6	32.4	76.7	5.5	5.4
6.0	Fine	Calm	19:12	22.2	8.6	32.7	64.4	4.6	5.7
			19:18	22.2	8.6	32.7	63.1	4.6	5.8
6.5	Fine	Calm	19:12	21.6	8.6	33.4	46.7	3.4	6.8
			19:19	21.6	8.6	33.4	47.4	3.4	6.8

#### Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	19:08	23.9	8.5	31.3	108.6	7.7	3.8
			19:14	23.9	8.5	31.3	108.3	7.6	3.7
3.5	Fine	Calm	19:10	23.6	8.6	31.5	101.9	7.2	3.7
			19:16	23.5	8.6	31.5	101.2	7.2	3.8
6.0	Fine	Calm	19:12	22.2	8.6	32.7	64.4	4.6	5.7
			19:18	22.2	8.6	32.7	63.1	4.6	5.8

	Name	Signature	Date
Conducted by:	Lee Man Hei		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

**Water Quality Monitoring Results at IB3 - Mid-Ebb Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	18:53	23.6	8.6	31.4	105.7	7.6	5.0
			18:59	23.5	8.6	31.4	107.1	7.6	5.0
1.0	Fine	Calm	18:53	23.5	8.6	31.5	107.8	7.7	4.9
			18:59	23.5	8.6	31.4	107.8	7.7	4.9
1.5	Fine	Calm	18:54	23.5	8.6	31.4	108.0	7.7	4.9
			19:00	23.5	8.6	31.5	108.2	7.7	4.9
2.0	Fine	Calm	18:54	23.5	8.6	31.4	108.7	7.7	4.9
			19:00	23.5	8.6	31.5	108.8	7.7	5.0
2.5	Fine	Calm	18:55	23.3	8.6	31.6	102.1	7.3	5.4
			19:01	23.3	8.6	31.6	101.4	7.2	5.4
3.0	Fine	Calm	18:55	23.3	8.6	31.7	97.6	6.9	5.6
			19:01	23.2	8.6	31.7	97.2	6.8	5.7
3.5	Fine	Calm	18:56	23.1	8.6	31.7	94.8	6.8	5.5
			19:01	23.1	8.6	31.7	93.3	6.7	5.5
4.0	Fine	Calm	18:56	23.1	8.7	31.8	89.8	6.4	5.4
			19:01	23.1	8.7	31.8	89.6	6.4	5.4
4.5	Fine	Calm	18:58	22.9	8.7	32.1	69.3	6.4	5.8
			19:02	22.9	8.7	32.1	87.7	6.3	5.8
5.0	Fine	Calm	18:57	22.4	8.7	32.6	74.5	5.4	7.3
			19:02	22.5	8.7	32.5	73.7	5.3	7.0
5.5	Fine	Calm	18:57	22.3	8.7	32.7	70.4	5.1	6.8
			19:02	22.3	8.7	32.8	70.2	5.1	6.8
6.0	Fine	Calm	18:57	22.2	8.7	32.9	69.0	5.0	6.9
			19:03	22.2	8.7	32.9	67.6	4.9	7.1
6.5	Fine	Calm	18:58	21.5	8.7	33.6	46.0	3.3	6.3
			19:03	21.5	8.7	33.6	45.4	3.3	6.4
7.0	Fine	Calm	18:58	21.0	8.7	34.2	42.8	3.1	6.8
			19:03	21.0	8.7	34.1	41.5	3.0	7.1
7.5	Fine	Calm	18:58	21.1	8.7	34.1	41.0	3.0	7.1
			19:04	20.8	8.8	34.6	39.8	2.9	7.5

**Water Quality Monitoring Results (Sampling Depth)**

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	18:53	23.5	8.6	31.5	107.8	7.7	4.9
			18:59	23.5	8.6	31.4	107.8	7.7	4.9
4.0	Fine	Calm	18:56	23.1	8.7	31.8	89.8	6.4	6.4
			19:01	23.1	8.7	31.8	89.6	6.4	6.4
7.0	Fine	Calm	18:58	21.0	8.7	34.2	42.8	3.1	6.8
			19:03	21.0	8.7	34.1	41.5	3.0	7.1

	Name	Signature	Date
Conducted by:	Lea Man Hei	<i>her</i>	18-Aug-14
Checked by:	W.K. Tang	<i>Kwan</i>	18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

#### Water Quality Monitoring Results at OB1 - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	19:24	23.7	8.5	31.4	99.9	7.1	3.4
			19:29	23.7	8.5	31.4	100.1	7.1	3.9
1.0	Fine	Calm	19:24	23.7	8.5	31.4	100.4	7.1	3.6
			19:30	23.7	8.5	31.4	100.8	7.1	3.6
1.5	Fine	Calm	19:24	23.7	8.5	31.4	102.0	7.2	3.6
			19:30	23.7	8.5	31.4	102.2	7.2	3.6
2.0	Fine	Calm	19:25	23.7	8.5	31.5	101.4	7.2	3.7
			19:30	23.7	8.5	31.5	100.7	7.1	3.7
2.5	Fine	Calm	19:25	23.5	8.5	31.6	99.5	7.1	3.8
			19:30	23.5	8.5	31.6	99.9	7.0	3.8
3.0	Fine	Calm	19:26	23.3	8.5	31.8	92.4	6.6	4.1
			19:31	23.2	8.5	31.8	91.5	6.5	4.1
3.5	Fine	Calm	19:26	23.2	8.5	31.8	88.5	6.3	4.2
			19:31	23.2	8.5	31.8	88.1	6.3	4.3
4.0	Fine	Calm	19:27	23.1	8.5	31.9	85.6	6.1	4.4
			19:32	23.1	8.5	31.9	85.2	6.1	4.5
4.5	Fine	Calm	19:27	22.9	8.5	32.0	78.7	5.6	5.9
			19:32	22.9	8.5	32.0	78.3	5.6	6.2
5.0	Fine	Calm	19:27	22.8	8.5	32.1	74.7	5.4	5.8
			19:33	22.8	8.5	32.1	73.7	5.3	5.9
5.5	Fine	Calm	19:28	22.6	8.5	32.2	69.0	5.0	5.7
			19:33	22.6	8.5	32.2	68.6	4.9	5.5
6.0	Fine	Calm	19:28	21.9	8.5	33.3	58.8	4.3	6.2
			19:33	21.9	8.5	33.3	58.0	4.2	6.8
6.5	Fine	Calm	19:28	21.5	8.5	33.7	47.4	3.4	6.5
			19:34	21.5	8.5	33.7	46.7	3.4	6.6

#### Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	19:24	23.7	8.5	31.4	100.4	7.1	3.6
			19:30	23.7	8.5	31.4	100.8	7.1	3.6
3.5	Fine	Calm	19:26	23.2	8.5	31.8	88.5	6.3	4.2
			19:31	23.2	8.5	31.8	88.1	6.3	4.3
6.0	Fine	Calm	19:28	21.9	8.5	33.3	58.8	4.3	6.2
			19:33	21.9	8.5	33.3	58.0	4.2	6.8

	Name	Signature	Date
Conducted by:	Lee Man Hei	<i>her</i>	18-Aug-14
Checked by:	W.K. Tang	<i>K.W.T.</i>	18-Aug-14

**Contract No. KL/2010/02**  
**Kai Tak Development**  
**- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)**

**Water Quality Monitoring Results at VH1 - Mid-Ebb Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	18:07	23.9	8.8	30.8	113.8	8.1	3.7
			18:19	23.9	8.8	30.8	113.7	8.0	3.8
1.0	Fine	Calm	18:07	23.8	8.8	30.8	113.9	8.1	3.8
			18:19	23.8	8.8	30.8	113.7	8.1	3.7
1.5	Fine	Calm	18:08	23.7	8.8	30.9	109.7	7.8	3.7
			18:20	23.7	8.8	30.9	108.4	7.7	3.7
2.0	Fine	Calm	18:08	23.5	8.7	31.0	105.9	7.5	3.7
			18:20	23.5	8.7	31.0	104.5	7.4	3.7
2.5	Fine	Calm	18:08	23.5	8.7	31.1	98.4	7.0	3.7
			18:20	23.4	8.7	31.1	97.4	6.9	3.7
3.0	Fine	Calm	18:09	23.3	8.7	31.3	94.3	6.7	3.9
			18:21	23.2	8.7	31.3	92.5	6.6	3.9
3.5	Fine	Calm	18:09	22.9	8.7	31.7	86.3	6.2	4.3
			18:21	22.8	8.7	31.8	86.3	6.2	4.3
4.0	Fine	Calm	18:09	22.3	8.7	32.3	68.1	4.9	4.6
			18:21	22.3	8.7	32.3	66.7	4.8	4.6
4.5	Fine	Calm	18:10	21.8	8.7	33.0	64.3	4.7	4.8
			18:22	21.7	8.7	33.1	62.1	4.5	4.8
5.0	Fine	Calm	18:10	21.3	8.8	33.7	52.9	3.9	4.7
			18:22	21.2	8.5	33.8	50.3	3.7	4.8
5.5	Fine	Calm	18:10	21.2	8.5	33.8	49.8	3.6	4.8
			18:22	21.1	8.5	33.9	48.4	3.5	4.7
6.0	Fine	Calm	18:10	21.1	8.5	33.9	48.3	3.5	4.7
			18:22	21.1	8.5	34.0	49.2	3.6	4.7
6.5	Fine	Calm	18:11	21.1	8.5	34.0	49.3	3.6	4.7
			18:23	21.0	8.5	34.1	50.0	3.7	4.8
7.0	Fine	Calm	18:11	21.0	8.5	34.2	50.0	3.7	4.8
			18:23	20.8	8.5	34.5	50.6	3.7	5.0
7.5	Fine	Calm	18:11	20.8	8.5	34.4	50.5	3.7	5.0
			18:23	20.6	8.5	34.6	48.3	3.5	5.3
8.0	Fine	Calm	18:11	20.6	8.5	34.6	49.6	3.6	5.3
			18:24	20.4	8.5	34.8	46.7	3.4	5.3
8.5	Fine	Calm	18:11	20.5	8.5	34.8	47.0	3.5	5.2
			18:24	20.3	8.5	35.0	43.4	3.2	5.6
9.0	Fine	Calm	18:12	20.3	8.5	35.0	43.8	3.2	5.3
			18:24	20.1	8.5	35.2	42.9	3.2	5.5
9.5	Fine	Calm	18:12	20.2	8.5	35.2	43.5	3.2	5.4
			18:24	20.1	8.5	35.3	41.4	3.1	5.4
10.0	Fine	Calm	18:13	20.1	8.5	35.3	41.6	3.1	5.4
			18:24	20.0	8.4	35.4	41.1	3.0	5.6

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

### Water Quality Monitoring Results at VH1 - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
10.5	Fine	Calm	18:14	20.0	8.5	35.4	41.3	3.1	5.6
			18:25	19.9	8.4	35.5	39.8	2.9	6.0
11.0	Fine	Calm	18:14	19.9	8.4	35.5	40.1	3.0	6.0
			18:25	19.8	8.4	35.7	39.3	2.9	6.4
11.5	Fine	Calm	18:14	19.9	8.4	35.6	39.4	2.9	7.0
			18:26	20.1	8.3	35.2	41.0	3.0	7.5
12.0	Fine	Calm	18:14	20.1	8.4	35.3	40.8	3.0	5.1
			18:26	20.2	8.3	35.1	39.9	2.9	5.5
12.5	Fine	Calm	18:15	20.3	8.3	35.1	39.9	2.9	5.4
			18:26	20.1	8.3	35.3	40.1	3.0	5.5
13.0	Fine	Calm	18:15	20.1	8.3	35.2	40.4	3.0	5.6
			18:26	19.8	8.3	35.7	39.8	2.9	5.6
13.5	Fine	Calm	18:15	19.9	8.3	35.5	39.8	2.9	5.6
			18:27	19.9	8.3	35.6	40.5	3.0	5.6
14.0	Fine	Calm	18:15	19.8	8.3	35.6	40.0	3.0	5.6
			18:27	20.0	8.3	35.4	39.8	2.9	5.9
14.5	Fine	Calm	18:15	20.0	8.3	35.5	40.2	3.0	6.0
			18:27	19.8	8.3	35.6	39.2	2.9	6.4
15.0	Fine	Calm	18:15	20.0	8.3	35.5	39.3	2.9	6.3
			18:27	19.7	8.3	35.8	41.2	3.1	7.2
15.5	Fine	Calm	18:16	19.7	8.3	35.8	40.3	3.0	6.9
			18:27	19.7	8.3	35.8	42.1	3.1	7.5
16.0	Fine	Calm	18:16	19.7	8.3	35.8	41.7	3.1	7.4
			18:27	19.7	8.3	35.8	42.5	3.2	7.4
16.5	Fine	Calm	18:16	19.7	8.3	35.8	42.4	3.1	7.4
			18:28	19.7	8.3	35.8	43.4	3.2	7.4
17.0	Fine	Calm	18:16	19.7	8.3	35.8	43.0	3.2	7.4
			18:28	19.8	8.3	35.7	43.7	3.2	7.1
17.5	Fine	Calm	18:16	19.7	8.3	35.8	43.6	3.2	7.3
			18:28	19.7	8.3	35.8	43.4	3.2	7.4
18.0	Fine	Calm	18:16	19.7	8.3	35.8	43.5	3.2	7.2
			18:28	19.7	8.3	35.8	43.2	3.2	7.5
18.5	Fine	Calm	18:17	19.7	8.3	35.8	43.2	3.2	7.5
			18:28	19.8	8.3	35.7	43.4	3.2	7.2
19.0	Fine	Calm	18:17	19.7	8.3	35.7	43.2	3.2	7.3
			18:29	19.7	8.3	35.8	42.8	3.2	7.5
19.5	Fine	Calm	18:17	19.7	8.3	35.8	43.1	3.2	7.5
			18:29	19.7	8.3	35.8	42.6	3.2	7.8
20.0	Fine	Calm	18:17	19.7	8.3	35.8	42.5	3.2	7.7
			18:29	19.7	8.3	35.9	42.3	3.1	7.9

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at VH1 - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
20.5	Fine	Calm	18:17	19.7	8.3	35.8	42.4	3.1	7.9
			18:29	19.7	8.3	35.8	41.7	3.1	7.6
21.0	Fine	Calm	18:18	19.7	8.3	35.8	42.0	3.1	7.6
			18:29	19.7	8.3	35.8	41.9	3.1	7.8
21.5	Fine	Calm	18:18	19.7	8.3	35.8	41.9	3.1	8.1
			18:30	19.8	8.3	35.7	41.8	3.1	8.5

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	18:07	23.8	8.8	30.8	113.9	8.1	3.8
			18:19	23.8	8.8	30.8	113.7	8.1	3.7
11.0	Fine	Calm	18:14	19.9	8.4	35.5	40.1	3.0	6.0
			18:25	19.8	8.4	35.7	39.3	2.9	6.4
21.0	Fine	Calm	18:18	19.7	8.3	35.8	42.0	3.1	7.8
			18:29	19.7	8.3	35.8	41.9	3.1	7.8

	Name	Signature	Date
Conducted by:	Lee Man Hei		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

### Water Quality Monitoring Results at VH2 - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	17:17	23.6	8.5	31.1	113.2	8.0	4.1
			17:28	23.6	8.5	31.0	114.3	8.1	3.9
1.0	Fine	Calm	17:18	23.6	8.5	31.0	115.0	8.2	3.8
			17:28	23.6	8.5	31.0	114.9	8.2	3.6
1.5	Fine	Calm	17:18	23.6	8.5	31.1	114.6	8.1	3.9
			17:29	23.5	8.5	31.1	114.1	8.1	3.9
2.0	Fine	Calm	17:18	23.5	8.5	31.2	113.3	8.1	3.8
			17:29	23.5	8.5	31.2	112.6	8.0	3.8
2.5	Fine	Calm	17:19	23.5	8.5	31.2	112.0	8.0	3.8
			17:29	23.5	8.5	31.2	111.9	8.0	3.8
3.0	Fine	Calm	17:19	23.3	8.4	31.4	111.1	7.9	3.7
			17:30	23.2	8.4	31.4	109.6	7.8	3.7
3.5	Fine	Calm	17:19	22.9	8.5	31.8	96.9	6.9	3.8
			17:30	22.9	8.4	31.8	94.2	6.7	3.8
4.0	Fine	Calm	17:19	22.8	8.5	32.0	85.7	6.1	3.8
			17:30	22.7	8.5	32.0	85.4	6.1	3.7
4.5	Fine	Calm	17:20	22.6	8.4	32.1	84.3	6.1	3.9
			17:31	22.6	8.5	32.1	83.0	6.0	4.0
5.0	Fine	Calm	17:20	22.4	8.5	32.4	79.0	5.7	4.0
			17:31	22.4	8.4	32.3	78.0	5.6	4.0
5.5	Fine	Calm	17:20	22.3	8.5	32.5	76.2	5.5	4.1
			17:31	22.3	8.4	32.5	76.1	5.5	4.1
6.0	Fine	Calm	17:20	22.2	8.4	32.7	75.6	5.5	4.2
			17:32	22.1	8.4	32.7	74.4	5.4	4.2
6.5	Fine	Calm	17:21	22.2	8.4	32.7	68.2	4.9	4.3
			17:32	22.2	8.4	32.7	68.9	5.0	4.2
7.0	Fine	Calm	17:21	21.4	8.4	33.7	68.6	5.0	4.1
			17:32	21.5	8.4	33.7	63.8	4.6	4.2
7.5	Fine	Calm	17:22	20.7	8.4	34.6	63.8	4.7	4.9
			17:32	20.6	8.5	34.7	59.6	4.4	4.9
8.0	Fine	Calm	17:22	20.2	8.5	35.2	55.5	4.1	4.9
			17:33	20.1	8.5	35.3	53.7	4.0	4.9
8.5	Fine	Calm	17:22	20.1	8.5	35.3	51.7	3.8	4.9
			17:33	20.1	8.5	35.2	51.0	3.8	4.9
9.0	Fine	Calm	17:23	20.0	8.5	35.4	49.8	3.7	5.2
			17:33	20.0	8.4	35.3	49.6	3.7	5.1
9.5	Fine	Calm	17:23	20.0	8.4	35.4	49.5	3.7	5.2
			17:34	20.0	8.4	35.4	49.5	3.7	5.2
10.0	Fine	Calm	17:23	19.9	8.4	35.5	49.4	3.7	5.3
			17:34	19.9	8.4	35.6	49.4	3.7	5.4

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at VH2 - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
10.5	Fine	Calm	17:23	19.8	8.4	35.6	49.4	3.7	5.6
			17:35	19.8	8.4	35.7	49.1	3.6	5.7
11.0	Fine	Calm	17:24	19.8	8.3	35.7	48.8	3.6	6.2
			17:35	19.8	8.3	35.7	48.7	3.6	6.2
11.5	Fine	Calm	17:24	19.7	8.3	35.8	48.6	3.6	6.5
			17:35	19.7	8.3	35.8	48.5	3.6	6.6
12.0	Fine	Calm	17:24	19.7	8.3	35.8	48.3	3.6	6.8
			17:36	19.7	8.3	35.8	48.3	3.6	6.8
12.5	Fine	Calm	17:25	19.7	8.2	35.8	48.3	3.6	6.8
			17:36	19.7	8.2	35.8	48.3	3.6	6.9
13.0	Fine	Calm	17:25	19.6	8.2	35.8	48.3	3.6	6.9
			17:36	19.6	8.2	35.8	48.3	3.6	7.0
13.5	Fine	Calm	17:25	19.6	8.2	35.9	48.3	3.6	7.2
			17:37	19.6	8.2	35.8	48.2	3.6	7.3
14.0	Fine	Calm	17:26	19.6	8.2	35.9	48.2	3.6	7.7
			17:37	19.6	8.1	35.9	47.9	3.6	7.5
14.5	Fine	Calm	17:26	19.6	8.1	35.9	47.4	3.5	8.4
			17:37	19.6	8.1	35.9	47.2	3.5	8.4
15.0	Fine	Calm	17:26	19.6	8.1	35.9	46.8	3.5	9.3
			17:38	19.6	8.1	35.9	46.7	3.5	9.4
15.5	Fine	Calm	17:26	19.6	8.1	35.9	46.1	3.4	10.3
			17:38	19.6	8.1	35.9	45.7	3.4	10.7
16.0	Fine	Calm	17:27	19.6	8.1	35.9	45.3	3.4	11.4
			17:38	19.6	8.1	35.9	45.1	3.3	11.4
16.5	Fine	Calm	17:27	19.6	8.1	35.9	44.9	3.3	13.4
			17:39	19.6	8.1	35.9	44.6	3.3	13.6

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	17:18	23.6	8.5	31.0	115.0	8.2	3.8
			17:28	23.6	8.5	31.0	114.9	8.2	3.6
8.5	Fine	Calm	17:22	20.1	8.5	35.3	51.7	3.8	4.9
			17:33	20.1	8.5	35.2	51.0	3.8	4.9
16.0	Fine	Calm	17:27	19.6	8.1	35.9	45.3	3.4	11.4
			17:38	19.6	8.1	35.9	45.1	3.3	11.4

	Name	Signature	Date
Conducted by:	Lee Man Hei	<i>Lee</i>	18-Aug-14
Checked by:	W.K. Tang	<i>K.W.T.</i>	18-Aug-14

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

**Contract No. KL/2010/02**  
**Kai Tak Development**  
**- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)**

**Water Quality Monitoring Results at WSD Intake at Cha Kwo Ling - Mid-Ebb Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	17:41	27.9	8.0	28.8	95.0	6.4	1.8
			17:45	27.8	8.1	29.1	93.6	6.3	1.5
1.0	Fine	Calm	17:41	27.8	8.0	29.1	93.7	6.3	2.0
			17:46	27.8	8.1	29.3	95.5	6.4	2.2
1.5	Fine	Calm	17:42	27.8	8.0	29.1	93.7	6.3	1.9
			17:46	27.8	8.1	29.3	97.8	6.5	2.0
2.0	Fine	Calm	17:42	27.7	8.0	29.2	95.0	6.4	1.7
			17:46	27.5	8.0	29.5	97.0	6.5	1.8
2.5	Fine	Calm	17:43	27.7	8.0	29.2	91.3	6.1	1.4
			17:46	27.4	8.0	29.8	92.1	6.2	1.6
3.0	Fine	Calm	17:43	27.4	8.0	29.4	89.3	6.0	1.6
			17:47	27.3	8.0	29.6	90.3	6.1	1.5
3.5	Fine	Calm	17:43	27.4	7.9	29.4	93.2	6.3	1.3
			17:47	27.3	8.0	29.6	89.3	6.0	1.4
4.0	Fine	Calm	17:43	27.4	7.9	29.4	94.2	6.3	1.0
			17:47	27.3	7.9	29.6	79.5	5.3	1.1
4.5	Fine	Calm	17:43	27.3	7.9	29.4	88.0	5.9	1.9
			17:47	26.8	7.9	29.8	88.3	5.0	1.8
5.0	Fine	Calm	17:43	28.8	7.8	29.7	77.4	5.2	1.5
			17:47	28.7	7.8	29.9	79.3	5.4	1.5
5.5	Fine	Calm	17:43	28.2	7.8	30.1	82.6	5.6	1.1
			17:47	25.8	7.8	30.6	80.9	5.5	1.1
6.0	Fine	Calm	17:44	25.6	7.7	30.7	72.2	6.0	1.6
			17:47	25.5	7.7	30.9	67.7	4.7	1.8
6.5	Fine	Calm	17:44	25.4	7.7	30.9	65.2	4.5	1.6
			17:47	25.4	7.7	31.0	63.4	4.4	1.8
7.0	Fine	Calm	17:44	25.0	7.6	31.4	69.5	4.1	1.8
			17:48	24.9	7.7	31.7	60.9	4.2	2.1
7.5	Fine	Calm	17:44	24.5	7.6	32.0	53.8	3.7	2.5
			17:48	24.3	7.7	32.4	52.8	3.7	2.5
8.0	Fine	Calm	17:44	23.7	7.6	32.9	45.9	3.2	3.5
			17:48	23.8	7.6	33.0	45.9	3.2	3.7
8.5	Fine	Calm	17:44	23.3	7.6	33.3	38.4	2.7	4.7
			17:48	23.4	7.6	33.4	41.3	2.9	5.3

**Water Quality Monitoring Results (Sampling Depth)**

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
4.5	Fine	Calm	17:43	27.3	7.9	29.4	68.0	5.9	1.9
			17:47	26.8	7.9	29.8	88.3	6.0	1.8

Conducted by:	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at WSD Intake at Tai Wan - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	18:36	23.5	8.7	31.4	105.1	7.5	4.0
			18:43	23.5	8.7	31.3	105.7	7.5	4.0
1.0	Fine	Calm	18:36	23.5	8.7	31.5	105.6	7.5	4.0
			18:44	23.5	8.7	31.4	105.5	7.5	4.0
1.5	Fine	Calm	18:37	23.4	8.7	31.6	97.9	7.0	4.1
			18:44	23.3	8.7	31.7	97.2	6.9	4.2
2.0	Fine	Calm	18:37	22.9	8.7	31.9	81.1	5.8	4.6
			18:45	22.9	8.7	31.9	80.3	5.7	4.6
2.5	Fine	Calm	18:38	22.9	8.7	31.9	79.9	5.7	4.5
			18:45	22.9	8.7	31.9	79.7	5.7	4.5
3.0	Fine	Calm	18:38	22.7	8.7	32.1	77.6	5.6	4.4
			18:46	22.7	8.7	32.1	75.6	5.4	4.4
3.5	Fine	Calm	18:38	22.7	8.7	32.1	74.3	5.3	4.4
			18:46	22.7	8.7	32.1	74.1	5.3	4.4
4.0	Fine	Calm	18:39	22.6	8.7	32.2	72.9	5.2	4.8
			18:46	22.6	8.7	32.2	71.9	5.2	4.8
4.5	Fine	Calm	18:39	22.6	8.7	32.2	70.3	5.0	4.8
			18:46	22.6	8.7	32.2	69.4	5.0	4.9
5.0	Fine	Calm	18:39	22.5	8.7	32.3	62.1	4.5	5.4
			18:47	22.5	8.7	32.3	67.2	4.8	5.3
5.5	Fine	Calm	18:40	22.4	8.7	32.4	58.9	4.2	5.6
			18:47	22.5	8.7	32.3	61.2	4.4	5.4
6.0	Fine	Calm	18:40	22.2	8.7	32.7	56.5	4.1	6.6
			18:47	22.4	8.7	32.4	58.0	4.2	5.7
6.5	Fine	Calm	18:40	21.9	8.7	33.1	49.8	3.6	7.0
			18:48	22.2	8.7	32.6	55.1	4.0	6.3
7.0	Fine	Calm	18:41	20.9	8.7	34.3	45.3	3.3	8.5
			18:48	21.7	8.7	33.3	49.6	3.6	7.3
7.5	Fine	Calm	18:41	20.5	8.8	34.9	38.3	2.8	8.9
			18:48	20.8	8.7	34.5	42.5	3.1	8.6
8.0	Fine	Calm	18:41	20.4	8.8	35.0	36.0	2.6	8.7
			18:49	20.5	8.8	34.9	37.6	2.8	9.0
8.5	Fine	Calm	18:42	20.4	8.8	34.9	35.5	2.6	8.6
			18:49	20.4	8.8	35.0	35.7	2.6	8.7

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

**Water Quality Monitoring Results at WSD Intake at Tai Wan - Mid-Ebb Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
9.0	Fine	Calm	18:42	20.4	8.7	35.0	35.1	2.6	10.2
			18:49	20.4	8.8	34.9	35.4	2.6	10.5
9.5	Fine	Calm	18:42	20.5	8.7	34.9	35.0	2.6	10.0
			18:49	20.5	8.7	34.9	35.3	2.6	10.7

**Water Quality Monitoring Results (Sampling Depth)**

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
5.0	Fine	Calm	18:39	22.5	8.7	32.3	62.1	4.5	5.4
			18:47	22.5	8.7	32.3	67.2	4.8	5.3

	Name	Signature	Date
Conducted by:	Lee Man Hei		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

### Water Quality Monitoring Results at WSD Intake at Quarry Bay - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	17:45	23.1	8.5	31.5	94.9	6.8	4.7
			17:52	23.1	8.5	31.5	94.2	6.7	4.5
1.0	Fine	Calm	17:46	23.0	8.5	31.7	94.0	6.7	4.7
			17:53	23.0	8.5	31.7	94.1	6.7	4.6
1.5	Fine	Calm	17:46	23.0	8.5	31.7	92.6	6.6	4.3
			17:53	23.0	8.5	31.7	92.7	6.6	4.2
2.0	Fine	Calm	17:46	23.0	8.5	31.7	92.6	6.6	4.2
			17:53	23.0	8.5	31.7	92.9	6.6	4.2
2.5	Fine	Calm	17:47	22.9	8.5	31.7	93.0	6.7	4.2
			17:53	22.9	8.5	31.7	93.1	6.7	4.1
3.0	Fine	Calm	17:47	22.8	8.5	31.9	91.4	6.6	4.1
			17:54	22.7	8.5	31.9	90.2	6.5	4.1
3.5	Fine	Calm	17:47	22.7	8.5	32.0	88.2	6.3	4.1
			17:54	22.7	8.5	32.0	87.6	6.3	4.1
4.0	Fine	Calm	17:48	22.3	8.5	32.4	81.6	5.9	4.1
			17:54	22.3	8.5	32.5	80.5	5.8	4.1
4.5	Fine	Calm	17:48	21.9	8.6	33.0	74.1	5.4	4.2
			17:54	22.0	8.6	32.8	69.3	5.0	4.3
5.0	Fine	Calm	17:48	21.9	8.5	33.0	67.7	4.9	4.3
			17:55	21.8	8.6	33.1	67.3	4.9	4.3
5.5	Fine	Calm	17:48	21.5	8.6	33.5	65.6	4.8	4.6
			17:55	21.5	8.6	33.4	64.6	4.7	4.6
6.0	Fine	Calm	17:49	21.4	8.6	33.6	63.5	4.6	4.5
			17:55	21.4	8.6	33.6	62.1	4.5	4.5
6.5	Fine	Calm	17:49	21.3	8.6	33.7	57.3	4.2	5.1
			17:55	21.3	8.6	33.7	56.9	4.1	5.0
7.0	Fine	Calm	17:49	21.3	8.6	33.8	56.2	4.1	4.7
			17:56	21.3	8.6	33.8	55.7	4.1	4.7
7.5	Fine	Calm	17:49	21.2	8.6	33.9	56.0	4.1	4.7
			17:56	21.2	8.6	34.0	56.1	4.1	4.8
8.0	Fine	Calm	17:50	21.2	8.6	34.0	56.8	4.1	4.4
			17:56	21.2	8.6	34.0	57.4	4.2	4.3
8.5	Fine	Calm	17:50	21.2	8.6	34.0	57.6	4.2	4.3
			17:56	21.2	8.6	34.0	57.8	4.2	4.2
9.0	Fine	Calm	17:50	21.2	8.5	34.0	57.9	4.2	4.3
			17:57	21.2	8.5	34.0	58.4	4.3	4.4
9.5	Fine	Calm	17:50	21.0	8.5	34.2	58.8	4.3	4.4
			17:57	21.0	8.5	34.3	58.5	4.3	4.5
10.0	Fine	Calm	17:51	20.8	8.5	34.4	57.8	4.2	5.6
			17:57	20.4	8.5	34.9	48.6	3.6	5.4

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02  
 Kai Tak Development  
 – Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at WSD Intake at Quarry Bay - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
10.5	Fine	Calm	17:51	20.1	8.6	35.3	47.1	3.5	6.6
			17:57	19.9	8.6	35.6	45.6	3.4	7.1
11.0	Fine	Calm	17:51	19.8	8.6	35.7	45.2	3.3	7.4
			17:58	19.7	8.6	35.8	44.3	3.3	7.4
11.5	Fine	Calm	17:51	19.7	8.6	35.8	44.3	3.3	7.4
			17:58	19.6	8.6	35.9	44.9	3.3	8.5

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
6.0	Fine	Calm	17:49	21.4	8.6	33.6	63.5	4.6	4.5
			17:55	21.4	8.6	33.6	62.1	4.5	4.5

	Name	Signature	Date
Conducted by:	Lee Man Hei		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

### Water Quality Monitoring Results at WSD Intake at Sai Wan Ho - Mid-Ebb Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	16:58	23.8	8.3	31.0	113.2	8.0	3.7
			17:05	23.7	7.3	31.1	109.6	7.8	3.7
1.0	Fine	Calm	16:58	23.4	8.2	31.3	113.5	8.1	3.7
			17:05	23.7	7.4	31.2	110.4	7.8	3.5
1.5	Fine	Calm	16:58	23.2	8.2	31.5	109.8	7.8	3.6
			17:05	23.7	7.4	31.2	109.3	7.7	3.9
2.0	Fine	Calm	16:59	23.1	8.1	31.5	105.2	7.5	3.7
			17:05	23.5	7.5	31.4	109.4	7.8	3.7
2.5	Fine	Calm	16:59	23.2	8.1	31.5	103.7	7.4	3.7
			17:06	23.2	7.5	31.5	103.7	7.4	3.7
3.0	Fine	Calm	16:59	23.1	8.0	31.5	103.2	7.4	3.6
			17:06	23.1	7.5	31.5	99.8	7.1	3.7
3.5	Fine	Calm	16:59	23.0	8.0	31.6	101.4	7.3	3.7
			17:06	23.1	7.6	31.5	95.4	6.8	3.7
4.0	Fine	Calm	17:00	22.9	7.9	31.7	100.2	7.2	3.6
			17:06	23.0	7.6	31.7	94.3	6.7	3.7
4.5	Fine	Calm	17:00	22.7	7.9	31.9	94.6	6.8	3.6
			17:06	22.9	7.7	31.7	93.5	6.7	3.7
5.0	Fine	Calm	17:00	22.7	7.9	31.8	92.1	6.6	3.6
			17:07	22.9	7.7	31.7	92.5	6.6	3.6
5.5	Fine	Calm	17:00	22.6	7.8	32.0	89.3	6.4	3.6
			17:07	22.7	7.8	31.9	90.0	6.5	3.7
6.0	Fine	Calm	17:01	22.2	7.8	32.5	83.7	6.0	3.7
			17:07	22.6	7.8	32.0	87.6	6.3	3.6
6.5	Fine	Calm	17:01	22.0	7.7	32.7	76.5	5.5	3.8
			17:07	21.9	7.8	32.9	76.7	5.6	4.0
7.0	Fine	Calm	17:01	21.8	7.7	33.0	73.5	5.3	4.0
			17:07	21.8	7.7	33.0	73.5	5.3	4.0
7.5	Fine	Calm	17:01	21.1	7.7	33.9	69.7	5.1	4.5
			17:07	21.5	7.9	33.4	67.6	4.9	4.2
8.0	Fine	Calm	17:01	20.8	7.7	34.2	65.0	4.8	4.7
			17:08	20.5	7.9	34.7	59.3	4.4	5.1
8.5	Fine	Calm	17:02	20.4	7.7	34.8	59.2	4.4	5.1
			17:08	20.3	8.0	35.0	51.5	3.8	5.5
9.0	Fine	Calm	17:02	20.2	7.6	35.1	56.6	4.2	5.3
			17:08	20.3	8.0	35.0	49.3	3.6	5.5
9.5	Fine	Calm	17:02	20.1	7.6	35.2	54.8	4.0	5.5
			17:08	20.1	8.0	35.2	48.0	3.5	5.7
10.0	Fine	Calm	17:02	20.0	7.6	35.3	54.2	4.0	5.7
			17:09	20.1	8.0	35.3	47.6	3.5	6.0

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

**Contract No. KL/2010/02**  
**Kai Tak Development**  
**- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)**

**Water Quality Monitoring Results at WSD Intake at Sai Wan Ho - Mid-Ebb Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
10.5	Fine	Calm	17:02	19.9	7.6	35.5	53.1	3.9	6.1
			17:09	19.9	8.0	35.5	47.2	3.5	6.2
11.0	Fine	Calm	17:03	19.8	7.5	35.6	52.8	3.9	6.4
			17:09	19.8	8.0	35.6	47.6	3.5	6.3
11.5	Fine	Calm	17:03	19.7	7.5	35.6	52.8	3.9	6.5
			17:09	19.7	8.0	35.7	47.9	3.6	6.5
12.0	Fine	Calm	17:03	19.7	7.4	35.7	52.5	3.9	7.0
			17:09	19.7	7.9	35.7	48.1	3.6	7.3
12.5	Fine	Calm	17:03	19.7	7.4	35.7	52.1	3.9	8.0
			17:10	19.7	7.9	35.7	48.0	3.6	7.7

**Water Quality Monitoring Results (Sampling Depth)**

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
6.5	Fine	Calm	17:01	22.0	7.7	32.7	76.5	5.5	3.8
			17:07	21.9	7.8	32.9	76.7	5.6	4.0

	Name	Signature	Date
Conducted by:	Lee Man Hei		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at AC1 - Mid-Flood Tide


Sampling Date: 18 August 2014

Secchi Disc Depth: 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	13:20	28.8	8.3	24.8	120.8	8.1	4.2
			13:22	28.2	8.3	26.7	124.5	8.4	4.7
1.0	Fine	Calm	13:20	28.0	8.3	27.2	127.7	8.6	3.7
			13:22	27.6	8.2	28.3	130.5	8.8	3.8
1.5	Fine	Calm	13:21	26.6	8.1	29.7	113.8	7.7	2.0
			13:22	26.9	8.1	29.5	128.4	8.7	3.3
2.0	Fine	Calm	13:21	26.2	7.9	30.2	105.3	7.2	2.9
			13:23	26.0	7.8	30.5	101.4	6.9	2.5
2.5	Fine	Calm	13:21	25.8	7.8	30.6	93.6	6.4	2.5
			13:23	25.8	7.8	30.7	85.8	5.9	2.2
3.0	Fine	Calm	13:21	25.5	7.4	31.0	58.8	4.0	6.3
			13:23	25.6	7.6	30.9	48.2	3.3	6.4

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	13:20	28.0	8.3	27.2	127.7	8.6	3.7
			13:22	27.6	8.2	28.3	130.5	8.8	3.9
2.5	Fine	Calm	13:21	25.8	7.8	30.6	93.6	6.4	2.5
			13:23	25.8	7.8	30.7	85.8	5.9	2.2

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at AC2 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	13:36	27.7	8.3	28.0	130.8	8.8	3.8
			13:39	28.5	8.3	28.6	128.2	8.6	4.1
1.0	Fine	Calm	13:36	27.0	8.2	29.3	127.7	8.6	3.0
			13:39	27.8	8.3	27.9	127.2	8.6	3.1
1.5	Fine	Calm	13:36	26.4	8.0	30.0	115.9	7.9	2.6
			13:39	27.1	8.2	29.3	110.4	7.5	2.5
2.0	Fine	Calm	13:37	26.0	7.9	30.5	101.1	6.9	2.2
			13:39	26.3	8.0	30.2	99.2	6.8	2.4
2.5	Fine	Calm	13:37	26.7	7.7	30.8	92.9	6.4	2.5
			13:39	26.9	7.8	30.7	90.5	6.2	2.6
3.0	Fine	Calm	13:37	25.6	7.5	31.0	92.2	6.3	4.5
			13:39	25.7	7.6	31.0	91.3	6.3	4.6
3.5	Fine	Calm	13:37	25.2	6.9	31.8	96.1	6.6	5.1
			13:39	25.3	6.9	31.6	95.5	6.6	5.2
4.0	Fine	Calm	13:37	24.7	6.8	32.5	78.3	5.4	8.0
			13:40	24.7	6.8	32.0	81.7	5.7	8.1
4.5	Fine	Calm	13:38	24.4	6.7	31.7	62.0	4.3	8.2
			13:40	24.6	6.8	31.8	64.2	4.5	8.2

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	13:36	27.0	8.2	29.3	127.7	8.6	3.0
			13:39	27.8	8.3	27.9	127.2	8.6	3.1
4.0	Fine	Calm	13:37	24.7	6.8	32.5	78.3	5.4	8.0
			13:40	24.7	6.8	32.0	81.7	5.7	8.1

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at AC3 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	13:08	28.0	8.3	27.0	119.0	8.0	4.1
			13:11	27.5	8.2	27.5	117.0	7.9	3.9
1.0	Fine	Calm	13:09	27.1	8.2	28.7	116.4	7.9	2.8
			13:11	27.4	8.2	28.7	114.9	7.8	3.3
1.5	Fine	Calm	13:09	27.0	8.1	29.2	116.6	7.9	2.7
			13:11	27.0	8.1	29.2	114.5	7.7	2.7
2.0	Fine	Calm	13:09	26.4	8.0	30.0	112.2	7.6	2.2
			13:11	26.5	8.0	30.0	110.4	7.5	2.7
2.5	Fine	Calm	13:09	25.8	7.8	30.7	84.1	5.8	2.2
			13:12	25.8	7.8	30.7	85.3	5.8	2.2
3.0	Fine	Calm	13:09	25.6	7.6	31.0	84.9	5.8	6.5
			13:12	25.5	7.6	31.1	84.7	5.8	6.5
3.5	Fine	Calm	13:10	25.0	6.9	32.1	85.2	5.9	10.4
			13:12	25.2	7.0	31.6	89.5	6.2	10.8

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	13:09	27.1	8.2	28.7	116.4	7.9	2.8
			13:11	27.4	8.2	28.7	114.9	7.8	3.3
3.0	Fine	Calm	13:09	25.6	7.6	31.0	84.9	5.8	6.5
			13:12	25.5	7.6	31.1	84.7	5.8	6.5

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

### Water Quality Monitoring Results at AC4 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	13:50	28.6	8.4	26.2	118.2	7.9	3.0
			13:52	29.2	8.4	25.0	115.9	7.7	2.5
1.0	Fine	Calm	13:50	27.4	8.3	28.8	115.6	7.8	2.8
			13:52	27.9	8.3	27.8	113.5	7.6	3.4
1.5	Fine	Calm	13:50	27.0	8.1	29.4	111.1	7.5	2.2
			13:52	27.2	8.2	29.2	109.5	7.4	2.5
2.0	Fine	Calm	13:51	26.5	7.9	30.2	101.9	6.9	2.5
			13:53	26.8	8.0	29.8	99.0	6.7	2.6
2.5	Fine	Calm	13:51	25.9	7.8	30.8	86.8	5.9	2.0
			13:53	26.3	7.8	30.4	87.2	5.9	2.3
3.0	Fine	Calm	13:51	25.5	7.5	31.2	84.3	5.8	3.5
			13:53	25.8	7.7	30.9	87.2	6.0	3.5
3.5	Fine	Calm	13:51	25.0	7.0	32.2	76.6	5.3	6.5
			13:53	25.2	7.0	31.9	79.2	5.4	6.8
4.0	Fine	Calm	13:51	24.5	7.0	32.7	76.3	5.3	12.5
			13:53	24.6	7.0	32.7	77.0	5.3	12.9

### Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	13:50	27.4	8.3	28.8	115.6	7.8	2.8
			13:52	27.9	8.3	27.8	113.5	7.6	3.4
3.5	Fine	Calm	13:51	25.0	7.0	32.2	76.6	5.3	6.5
			13:53	25.2	7.0	31.9	79.2	5.4	6.9

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at AC5 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	12:57	28.0	8.2	26.9	113.6	7.7	3.5
			12:59	28.6	8.2	26.5	104.1	7.0	3.4
1.0	Fine	Calm	12:57	27.5	8.1	28.6	116.4	7.8	3.1
			12:59	27.6	8.1	28.6	111.0	7.5	3.1
1.5	Fine	Calm	12:57	26.9	8.0	29.3	109.9	7.4	2.5
			12:59	27.0	8.0	29.3	111.7	7.6	2.5
2.0	Fine	Calm	12:57	26.4	7.9	30.0	94.8	6.5	2.2
			12:59	26.4	7.9	30.1	101.8	6.9	2.3
2.5	Fine	Calm	12:57	25.8	7.8	30.6	87.8	6.0	2.5
			12:59	26.0	7.8	30.5	88.4	6.0	2.7
3.0	Fine	Calm	12:58	25.5	7.7	30.9	78.6	5.4	5.1
			13:00	25.4	7.6	31.1	81.6	5.6	5.7
3.5	Fine	Calm	12:58	25.3	7.2	31.4	77.1	5.3	7.0
			13:00	25.2	7.0	30.3	76.0	5.3	7.2

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	12:57	27.5	8.1	28.6	116.4	7.8	3.1
			12:59	27.6	8.1	28.6	111.0	7.5	3.1
3.0	Fine	Calm	12:58	25.6	7.7	30.9	78.6	5.4	5.1
			13:00	25.4	7.6	31.1	81.6	5.6	5.7

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

**Water Quality Monitoring Results at AC6 - Mid-Flood Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	12:47	28.3	8.2	25.6	111.3	7.5	2.7
			12:50	29.0	8.1	25.5	111.2	7.4	2.7
1.0	Fine	Calm	12:48	27.5	8.1	28.4	111.4	7.5	2.1
			12:51	27.0	8.0	28.8	108.6	7.4	2.1
1.5	Fine	Calm	12:48	26.7	8.0	29.4	95.5	6.5	2.0
			12:51	26.6	8.0	29.6	90.1	6.1	2.3
2.0	Fine	Calm	12:48	26.4	7.9	29.9	83.4	5.7	2.0
			12:51	26.4	7.9	29.9	83.2	5.7	2.1
2.5	Fine	Calm	12:48	26.1	7.8	30.3	76.0	5.2	1.6
			12:52	26.1	7.9	30.3	75.5	5.2	1.6
3.0	Fine	Calm	12:48	25.7	7.8	30.7	72.0	4.9	1.4
			12:52	25.8	7.8	30.7	72.7	5.0	1.5
3.5	Fine	Calm	12:49	25.5	7.7	30.8	70.6	4.9	1.9
			12:52	25.5	7.7	30.9	68.6	4.7	1.8
4.0	Fine	Calm	12:49	25.2	7.4	31.4	67.5	4.7	10.3
			12:52	25.2	7.1	31.5	68.3	4.7	10.5
4.5	Fine	Calm	12:49	24.9	7.1	31.9	62.0	4.3	10.5
			12:52	24.8	7.0	32.1	65.0	4.5	10.5
5.0	Fine	Calm	12:49	24.6	7.0	32.3	43.7	3.0	9.2
			12:53	24.7	6.9	32.3	43.4	3.0	9.7

**Water Quality Monitoring Results (Sampling Depth)**

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	12:48	27.5	8.1	28.4	111.4	7.5	2.1
			12:51	27.0	8.0	28.8	108.6	7.4	2.1
4.5	Fine	Calm	12:49	24.9	7.1	31.9	62.0	4.3	10.5
			12:52	24.8	7.0	32.1	65.0	4.5	10.5

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at AC7 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	12:34	28.4	8.2	24.5	117.4	8.0	2.6
			12:37	28.8	8.3	24.1	117.1	7.9	2.8
1.0	Fine	Calm	12:34	27.8	8.1	28.3	117.8	7.9	2.4
			12:37	28.0	8.2	26.8	118.2	8.0	2.6
1.5	Fine	Calm	12:34	26.9	7.9	29.3	111.2	7.5	1.9
			12:37	26.8	7.9	29.2	109.8	7.5	1.8
2.0	Fine	Calm	12:35	26.1	7.8	30.2	92.8	6.3	2.3
			12:37	26.1	7.8	30.2	98.0	6.7	1.8
2.5	Fine	Calm	12:35	26.0	7.7	30.4	91.4	6.3	2.5
			12:38	26.0	7.7	30.4	90.5	6.2	2.1
3.0	Fine	Calm	12:35	25.6	7.7	30.7	88.8	6.1	1.9
			12:38	25.7	7.7	30.7	92.1	6.3	1.9
3.5	Fine	Calm	12:35	25.5	7.6	30.9	80.9	5.6	1.9
			12:38	25.5	7.6	30.9	79.9	5.5	2.3
4.0	Fine	Calm	12:35	25.3	7.4	31.2	77.4	5.3	7.9
			12:38	25.3	7.5	31.2	79.5	5.5	7.8
4.5	Fine	Calm	12:35	24.9	7.0	31.8	73.8	5.1	9.4
			12:38	24.8	7.0	31.9	74.3	5.1	9.5

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	12:34	27.8	8.1	28.3	117.8	7.9	2.4
			12:37	28.0	8.2	26.8	118.2	8.0	2.6
4.0	Fine	Calm	12:35	25.3	7.4	31.2	77.4	5.3	7.9
			12:38	25.3	7.5	31.2	79.5	5.5	7.8

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02  
 Kai Tak Development  
 – Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at JVC - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 1.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	14:02	28.4	8.3	26.8	127.1	8.5	3.2
			14:08	27.7	8.3	28.0	125.5	8.5	3.1
1.0	Fine	Calm	14:02	27.9	8.2	28.6	116.0	7.8	2.7
			14:08	27.1	8.2	29.1	110.9	7.5	2.8
1.5	Fine	Calm	14:03	26.7	8.1	29.8	90.9	6.2	2.4
			14:08	26.8	8.1	29.7	97.8	6.6	2.8
2.0	Fine	Calm	14:03	26.3	7.8	30.3	98.5	6.7	2.4
			14:09	26.5	7.9	30.1	100.0	6.8	2.8
2.5	Fine	Calm	14:03	25.9	7.8	30.9	94.3	6.4	2.0
			14:09	25.9	7.8	30.9	92.9	6.3	2.3
3.0	Fine	Calm	14:04	25.6	7.5	31.2	84.4	5.8	12.5
			14:09	25.5	7.6	31.4	82.8	5.7	12.5
3.5	Fine	Calm	14:04	24.6	6.9	32.6	61.5	4.3	9.6
			14:09	24.9	7.0	32.4	60.4	4.2	9.5
4.0	Fine	Calm	14:06	24.4	6.9	32.9	48.1	3.3	8.8
			14:10	24.3	7.0	33.0	50.1	3.6	8.9

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	14:02	27.9	8.2	28.6	116.0	7.8	2.7
			14:08	27.1	8.2	29.1	110.9	7.5	2.8
3.5	Fine	Calm	14:04	24.6	6.9	32.6	61.5	4.3	9.6
			14:09	24.9	7.0	32.4	60.4	4.2	9.5

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at KT1 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	12:14	28.6	8.3	24.5	103.7	7.0	3.2
			12:17	28.6	8.3	24.6	106.6	7.2	2.6
1.0	Fine	Calm	12:14	26.9	8.0	28.2	108.0	7.4	2.4
			12:17	27.9	8.1	26.5	111.0	7.5	2.5
1.5	Fine	Calm	12:14	26.3	7.8	29.1	100.2	6.9	2.2
			12:17	27.0	7.9	28.3	97.0	6.6	2.4
2.0	Fine	Calm	12:14	25.9	7.7	29.9	90.7	6.2	1.4
			12:17	26.2	7.7	29.4	92.6	6.3	1.5
2.5	Fine	Calm	12:14	25.6	7.6	30.3	86.7	6.0	2.3
			12:18	25.8	7.7	30.1	85.5	5.9	2.4
3.0	Fine	Calm	12:14	26.5	7.6	30.5	78.9	5.4	2.4
			12:18	25.5	7.6	30.5	77.9	5.4	2.5
3.5	Fine	Calm	12:15	25.5	7.6	30.6	78.4	5.4	2.0
			12:18	25.5	7.6	30.6	77.1	5.3	2.3
4.0	Fine	Calm	12:15	25.1	7.5	31.0	66.8	4.6	2.1
			12:18	25.4	7.6	30.8	72.7	5.0	2.2
4.5	Fine	Calm	12:15	24.8	7.5	31.5	61.7	4.3	7.3
			12:18	24.9	7.5	31.5	68.9	4.8	7.9
5.0	Fine	Calm	12:15	24.2	7.4	32.2	52.8	3.7	8.9
			12:18	24.3	7.4	32.1	49.5	3.5	8.8
5.5	Fine	Calm	12:15	23.9	7.5	32.6	41.2	2.9	5.6
			12:18	24.1	7.5	32.5	43.3	3.0	6.5

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	12:14	26.9	8.0	28.2	108.0	7.4	2.4
			12:17	27.9	8.1	26.5	111.0	7.5	2.5
3.0	Fine	Calm	12:14	25.5	7.6	30.5	78.9	5.4	2.4
			12:18	25.5	7.6	30.5	77.9	5.4	2.5
5.0	Fine	Calm	12:15	24.2	7.4	32.2	52.8	3.7	8.9
			12:18	24.3	7.4	32.1	49.5	3.5	8.8

Name	Signature	Date
Conducted by:	Lam Ho Chun	18-Aug-14
Checked by:	W.K. Tang	18-Aug-14

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at KTN - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 0.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	14:31	28.4	8.0	25.2	102.2	6.9	5.8
			14:31	27.8	8.1	24.9	94.3	6.5	5.3
1.0	Fine	Calm	14:31	27.0	8.0	28.7	96.2	6.5	6.0
			14:32	27.0	8.0	28.6	91.1	6.2	5.9
1.5	Fine	Calm	14:31	28.6	8.0	26.2	86.7	5.8	8.1
			14:32	27.8	8.1	27.0	87.4	5.9	8.2

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	14:31	27.0	8.0	28.7	96.2	6.5	6.0
			14:32	27.0	8.0	28.6	91.1	6.2	5.9

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at IB1 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	11:50	23.6	8.3	30.6	91.5	6.5	4.0
			11:55	23.6	8.3	30.5	90.3	6.4	4.0
1.0	Fine	Calm	11:50	23.5	8.2	30.8	88.6	6.3	4.1
			11:55	23.5	8.2	30.7	88.3	6.3	4.0
1.5	Fine	Calm	11:51	23.5	8.1	30.8	87.6	6.2	4.0
			11:56	23.5	8.1	30.8	87.5	6.2	4.1
2.0	Fine	Calm	11:51	23.5	8.0	30.9	87.2	6.2	3.8
			11:57	23.5	7.9	30.8	87.1	6.2	3.8
2.5	Fine	Calm	11:52	23.4	7.9	30.9	86.8	6.2	3.8
			11:57	23.4	7.9	30.9	86.6	6.2	3.9
3.0	Fine	Calm	11:52	23.4	7.8	30.9	86.1	6.1	3.9
			11:57	23.4	7.8	30.9	85.6	6.1	3.9
3.5	Fine	Calm	11:52	23.4	7.8	30.9	85.1	6.1	3.9
			11:58	23.4	7.7	30.9	84.7	6.0	3.9
4.0	Fine	Calm	11:53	23.3	7.7	30.9	82.8	5.9	4.8
			11:58	23.3	7.7	30.9	82.5	5.9	4.9
4.5	Fine	Calm	11:53	23.3	7.6	31.0	80.3	5.7	4.6
			11:59	23.3	7.6	31.0	80.0	5.7	4.3
5.0	Fine	Calm	11:54	23.2	7.6	31.2	79.4	5.7	4.2
			11:59	23.3	7.6	31.1	75.5	5.4	4.0
5.5	Fine	Calm	11:54	23.2	7.6	31.3	76.2	5.4	4.1
			11:59	23.2	7.6	31.3	76.2	5.4	4.1

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	11:50	23.5	8.2	30.8	88.6	6.3	4.1
			11:55	23.5	8.2	30.7	88.3	6.3	4.0
3.0	Fine	Calm	11:52	23.4	7.8	30.9	86.1	6.1	3.9
			11:57	23.4	7.8	30.9	85.6	6.1	3.9
5.0	Fine	Calm	11:54	23.2	7.6	31.2	79.4	5.7	4.2
			11:59	23.3	7.6	31.1	75.5	5.4	4.0

	Name	Signature	Date
Conducted by:	Lee Man Hei	hei'	18-Aug-14
Checked by:	W.K. Tang	kwan	18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

#### Water Quality Monitoring Results at IB2 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	12:20	23.6	7.7	30.7	80.1	5.7	3.3
			12:24	23.7	7.6	30.7	81.2	5.8	3.5
1.0	Fine	Calm	12:21	23.5	7.6	30.8	81.8	5.8	3.5
			12:25	23.5	7.6	30.9	82.0	5.8	3.4
1.5	Fine	Calm	12:21	23.4	7.5	30.9	82.0	5.8	3.5
			12:25	23.4	7.9	30.9	85.0	6.1	3.7
2.0	Fine	Calm	12:21	23.4	7.5	31.0	82.2	5.9	3.8
			12:25	23.3	7.5	31.0	82.1	5.9	4.1
2.5	Fine	Calm	12:21	23.3	7.5	31.0	81.8	5.8	3.9
			12:26	23.2	7.9	31.1	82.0	5.9	3.7
3.0	Fine	Calm	12:21	23.2	7.5	31.1	81.0	5.8	3.9
			12:26	23.2	7.9	31.1	80.0	5.7	3.8
3.5	Fine	Calm	12:22	23.1	7.5	31.2	77.2	5.5	4.2
			12:26	23.1	7.5	31.2	76.6	5.5	4.1
4.0	Fine	Calm	12:22	23.1	7.5	31.2	75.1	5.4	3.9
			12:27	23.1	7.5	31.2	74.5	5.3	3.9
4.5	Fine	Calm	12:22	23.0	7.5	31.3	74.0	5.3	4.0
			12:27	23.0	7.5	31.3	72.9	5.2	4.0
5.0	Fine	Calm	12:22	22.9	7.5	31.4	71.2	5.1	4.9
			12:27	22.9	7.5	31.4	70.7	6.1	4.7
5.5	Fine	Calm	12:22	22.8	7.5	31.6	65.5	4.7	6.8
			12:26	22.7	7.6	31.6	65.0	4.7	7.2
6.0	Fine	Calm	12:23	22.6	7.5	31.9	58.8	4.2	8.4
			12:28	22.6	7.5	31.9	57.8	4.2	8.6
6.5	Fine	Calm	12:23	22.4	7.4	32.2	53.1	3.8	13.2
			12:28	22.4	7.5	32.2	51.9	3.7	13.6

#### Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	12:21	23.5	7.6	30.8	81.8	5.8	3.5
			12:25	23.6	7.6	30.9	82.0	5.8	3.4
3.5	Fine	Calm	12:22	23.1	7.5	31.2	77.2	5.5	4.2
			12:26	23.1	7.5	31.2	76.6	5.5	4.1
6.0	Fine	Calm	12:23	22.6	7.5	31.9	58.8	4.2	8.4
			12:28	22.6	7.5	31.9	57.8	4.2	8.6

	Name	Signature	Date
Conducted by:	Lee Man Hei	<i>her</i>	18-Aug-14
Checked by:	W.K. Tang	<i>K.Wai</i>	18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

#### Water Quality Monitoring Results at IB3 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	12:35	23.6	8.1	31.1	90.8	6.4	3.7
			12:40	23.8	7.5	31.1	88.8	6.3	3.6
1.0	Fine	Calm	12:35	23.5	8.0	31.2	91.0	6.5	3.6
			12:40	23.6	7.5	31.2	90.0	6.4	3.8
1.5	Fine	Calm	12:38	23.5	7.9	31.2	90.3	6.4	3.6
			12:41	23.6	7.5	31.3	89.2	6.3	3.6
2.0	Fine	Calm	12:38	23.5	7.9	31.2	89.9	6.4	3.6
			12:41	23.4	7.5	31.3	89.2	6.3	3.6
2.5	Fine	Calm	12:38	23.5	7.8	31.3	89.2	6.3	3.7
			12:41	23.4	7.5	31.3	89.0	6.3	3.8
3.0	Fine	Calm	12:38	23.3	7.7	31.3	88.7	6.3	3.8
			12:41	23.2	7.4	31.3	85.6	6.1	4.1
3.5	Fine	Calm	12:38	23.1	7.7	31.4	88.4	6.2	4.0
			12:41	23.1	7.4	31.4	85.5	6.1	4.3
4.0	Fine	Calm	12:37	23.1	7.6	31.5	83.6	6.0	3.9
			12:42	23.1	7.4	31.5	83.7	6.0	4.3
4.5	Fine	Calm	12:37	22.9	7.6	31.7	81.8	5.9	3.7
			12:42	23.1	7.4	31.8	81.8	5.8	4.0
5.0	Fine	Calm	12:37	22.8	7.6	31.9	78.1	5.5	3.7
			12:42	22.9	7.4	31.8	80.5	5.8	3.8
5.5	Fine	Calm	12:38	22.7	7.5	32.0	73.3	5.3	4.0
			12:43	22.6	7.4	32.1	73.4	5.3	4.1
6.0	Fine	Calm	12:38	22.4	7.5	32.2	69.6	5.0	4.8
			12:43	22.4	7.4	32.2	68.8	5.0	4.4
6.5	Fine	Calm	12:38	22.4	7.5	32.3	64.9	4.7	5.7
			12:43	22.1	7.4	32.6	64.4	4.7	5.7
7.0	Fine	Calm	12:38	22.0	7.5	32.6	61.1	4.4	6.6
			12:43	21.8	7.4	32.9	59.5	4.3	8.0
7.5	Fine	Calm	12:39	21.8	7.5	33.0	55.3	4.0	8.7
			12:43	21.7	7.5	33.1	64.6	4.0	9.0

#### Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	12:35	23.5	8.0	31.2	91.0	6.5	3.6
			12:40	23.6	7.5	31.2	90.0	6.4	3.8
4.0	Fine	Calm	12:37	23.1	7.6	31.5	83.6	6.0	3.9
			12:42	23.1	7.4	31.5	83.7	6.0	4.3
7.0	Fine	Calm	12:38	22.0	7.5	32.6	61.1	4.4	6.6
			12:43	21.8	7.4	32.9	59.5	4.3	8.0

Name	Signature	Date
Conducted by:	Lee Man Hei	18-Aug-14
Checked by:	W.K. Tang	18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

#### Water Quality Monitoring Results at OB1 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	12:07	23.8	6.2	30.5	91.9	6.5	3.7
			12:11	23.8	6.2	30.5	92.5	6.6	3.8
1.0	Fine	Calm	12:07	23.8	7.5	30.5	97.7	6.9	3.6
			12:12	23.8	6.2	30.6	92.9	6.6	3.5
1.5	Fine	Calm	12:07	23.5	7.4	30.6	96.3	6.9	3.5
			12:12	23.2	6.1	30.9	88.6	6.3	3.8
2.0	Fine	Calm	12:08	23.0	6.1	31.3	82.1	5.9	3.6
			12:12	23.0	6.1	31.3	80.4	5.8	3.8
2.5	Fine	Calm	12:08	22.9	6.1	31.3	77.5	5.6	3.7
			12:12	22.9	6.2	31.4	76.8	5.5	3.6
3.0	Fine	Calm	12:08	22.9	6.2	31.4	75.3	5.4	3.6
			12:13	22.9	6.2	31.4	74.4	5.3	3.7
3.5	Fine	Calm	12:08	22.6	6.2	31.7	73.0	5.3	3.8
			12:13	22.6	6.2	31.7	71.5	5.1	3.8
4.0	Fine	Calm	12:09	22.4	6.2	32.0	65.2	4.7	3.9
			12:14	22.4	6.2	32.0	64.2	4.6	4.0
4.5	Fine	Calm	12:09	22.4	6.2	32.1	62.4	4.5	4.1
			12:14	22.4	6.2	32.1	62.0	4.5	4.1
5.0	Fine	Calm	12:09	22.3	6.2	32.2	61.0	4.4	4.3
			12:14	22.3	6.2	32.2	60.1	4.3	4.2
5.5	Fine	Calm	12:09	22.0	6.2	32.6	58.6	4.2	4.4
			12:14	22.0	6.2	32.6	57.4	4.2	4.4
6.0	Fine	Calm	12:09	21.9	6.3	32.7	54.7	4.0	4.2
			12:15	21.9	6.3	32.7	54.4	3.9	4.3
6.5	Fine	Calm	12:10	21.8	6.3	32.8	52.8	3.8	4.0
			12:15	21.8	6.3	32.9	52.6	3.8	4.3

#### Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	12:07	23.8	7.5	30.5	97.7	6.9	3.6
			12:12	23.8	6.2	30.6	92.9	6.6	3.5
3.5	Fine	Calm	12:08	22.6	6.2	31.7	73.0	5.3	3.8
			12:13	22.6	6.2	31.7	71.5	5.1	3.8
6.0	Fine	Calm	12:09	21.9	6.3	32.7	54.7	4.0	4.2
			12:15	21.9	6.3	32.7	54.4	3.9	4.3

	Name	Signature	Date
Conducted by:	Lee Man Hei	<i>Lee</i>	18-Aug-14
Checked by:	W.K. Tang	<i>W.K.Tang</i>	18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

### Water Quality Monitoring Results at VH1 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	13:09	23.6	8.2	29.3	93.7	6.7	4.4
			13:22	23.6	8.2	29.3	93.7	6.7	4.2
1.0	Fine	Calm	13:10	23.6	8.1	29.3	93.8	6.7	3.9
			13:23	23.6	8.1	29.3	93.7	6.7	3.7
1.5	Fine	Calm	13:10	23.4	8.1	29.3	92.5	6.7	3.5
			13:23	23.5	8.1	29.3	93.2	6.7	3.5
2.0	Fine	Calm	13:11	23.3	8.1	29.3	91.2	6.6	3.5
			13:24	23.4	8.1	29.3	91.6	6.6	3.5
2.5	Fine	Calm	13:11	23.2	8.1	29.4	89.8	6.5	3.6
			13:24	23.2	8.1	29.4	90.8	6.6	3.6
3.0	Fine	Calm	13:11	23.0	8.1	29.5	88.4	6.4	3.6
			13:24	23.0	8.1	29.5	87.6	6.3	3.6
3.5	Fine	Calm	13:12	23.0	8.0	29.6	86.2	6.2	3.6
			13:24	23.0	8.0	29.6	85.8	6.2	3.6
4.0	Fine	Calm	13:12	23.0	8.0	29.6	84.4	6.1	3.6
			13:25	22.9	8.0	29.6	83.7	6.1	3.7
4.5	Fine	Calm	13:12	22.9	8.0	29.7	82.4	6.0	3.7
			13:25	22.8	8.0	29.8	81.5	5.9	3.6
5.0	Fine	Calm	13:12	22.5	7.9	30.0	70.1	5.1	3.7
			13:25	22.7	7.9	29.9	69.5	5.1	3.7
5.5	Fine	Calm	13:12	22.5	7.9	30.1	71.3	5.2	3.8
			13:25	22.4	7.9	30.1	71.4	5.2	3.8
6.0	Fine	Calm	13:13	22.3	7.9	30.3	68.2	5.0	3.9
			13:26	22.3	7.9	30.3	67.2	4.9	3.9
6.5	Fine	Calm	13:13	22.0	7.9	30.7	63.1	4.6	3.9
			13:26	22.0	7.9	30.7	61.6	4.5	4.6
7.0	Fine	Calm	13:13	21.8	7.8	31.1	60.5	4.4	4.8
			13:26	21.7	7.8	31.1	59.5	4.4	4.8
7.5	Fine	Calm	13:13	21.4	7.8	31.5	56.8	4.2	5.1
			13:27	21.4	7.8	31.5	55.2	4.1	5.1
8.0	Fine	Calm	13:14	21.3	7.8	31.7	52.5	3.9	5.2
			13:27	21.3	7.8	31.7	51.4	3.8	5.3
8.5	Fine	Calm	13:14	21.1	7.8	31.9	49.9	3.7	5.5
			13:27	21.1	7.8	31.9	48.9	3.6	5.7
9.0	Fine	Calm	13:14	21.1	7.8	32.0	47.4	3.5	5.7
			13:27	21.1	7.8	32.0	46.8	3.5	5.7
9.5	Fine	Calm	13:14	21.0	7.8	32.0	46.4	3.4	5.7
			13:27	21.0	7.8	32.0	46.0	3.4	6.0
10.0	Fine	Calm	13:15	21.0	7.8	32.1	44.8	3.3	6.1
			13:28	21.0	7.8	32.0	44.5	3.3	6.1

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

### Water Quality Monitoring Results at VH1 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
10.5	Fine	Calm	13:15	20.9	7.7	32.2	43.7	3.2	6.6
			13:28	20.9	7.7	32.2	44.0	3.3	6.9
11.0	Fine	Calm	13:15	20.7	7.7	32.5	44.2	3.3	7.3
			13:28	20.6	7.7	32.6	44.2	3.3	7.5
11.5	Fine	Calm	13:15	20.6	7.7	32.6	44.1	3.3	8.0
			13:28	20.6	7.7	32.6	42.8	3.2	7.9
12.0	Fine	Calm	13:16	20.6	7.7	32.7	43.2	3.2	8.0
			13:29	20.6	7.7	32.6	43.4	3.2	7.8
12.5	Fine	Calm	13:18	20.6	7.7	32.7	43.1	3.2	8.0
			13:29	20.5	7.7	32.7	43.1	3.2	8.0
13.0	Fine	Calm	13:16	20.5	7.7	32.8	42.9	3.2	8.3
			13:29	20.5	7.7	32.8	42.8	3.2	8.6
13.5	Fine	Calm	13:16	20.4	7.7	32.9	42.6	3.2	9.1
			13:28	20.4	7.7	32.9	42.3	3.2	9.1
14.0	Fine	Calm	13:17	20.2	7.7	33.1	41.2	3.1	9.6
			13:30	20.2	7.7	33.1	41.1	3.1	9.5
14.5	Fine	Calm	13:17	20.2	7.7	33.2	40.7	3.0	9.2
			13:30	20.2	7.7	33.2	40.1	3.0	9.4
15.0	Fine	Calm	13:17	20.2	7.7	33.2	39.6	3.0	9.6
			13:30	20.2	7.7	33.2	39.4	2.9	9.5
15.5	Fine	Calm	13:17	20.2	7.7	33.2	39.0	2.9	9.6
			13:30	20.2	7.7	33.2	38.9	2.9	10.2
16.0	Fine	Calm	13:17	20.1	7.7	33.2	38.9	2.9	9.7
			13:31	20.1	7.7	33.2	38.6	2.9	10.2
16.5	Fine	Calm	13:18	20.1	7.7	33.3	38.3	2.9	10.1
			13:31	20.1	7.7	33.3	38.1	2.8	9.9
17.0	Fine	Calm	13:18	20.1	7.7	33.3	37.8	2.8	9.9
			13:31	20.1	7.6	33.3	37.9	2.8	9.0
17.5	Fine	Calm	13:18	20.0	7.6	33.4	37.5	2.8	9.7
			13:31	20.0	7.6	33.4	37.5	2.8	10.1
18.0	Fine	Calm	13:19	20.0	7.6	33.5	37.2	2.8	9.7
			13:32	20.0	7.6	33.5	37.2	2.8	9.7
18.5	Fine	Calm	13:19	19.9	7.6	33.5	37.5	2.8	8.1
			13:32	19.9	7.6	33.5	37.5	2.8	8.1
19.0	Fine	Calm	13:19	19.9	7.7	33.5	37.5	2.8	8.1
			13:32	19.9	7.7	33.5	37.6	2.8	7.4
19.5	Fine	Calm	13:20	19.9	7.7	33.6	38.0	2.8	7.4
			13:33	19.9	7.7	33.6	38.1	2.9	7.4
20.0	Fine	Calm	13:20	19.8	7.7	33.7	37.8	2.8	7.9
			13:33	19.8	7.7	33.7	37.6	2.8	8.4

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at VH1 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
20.5	Fine	Calm	13:20	19.8	7.7	33.7	37.2	2.8	8.8
			13:33	19.8	7.7	33.7	37.0	2.8	9.5
21.0	Fine	Calm	13:20	19.8	7.7	33.7	36.6	2.7	9.0
			13:33	19.8	7.7	33.7	36.6	2.7	9.1
21.5	Fine	Calm	13:20	19.8	7.7	33.7	36.4	2.7	9.0
			13:33	19.8	7.7	33.7	36.2	2.7	9.7
22.0	Fine	Calm	13:21	19.8	7.7	33.7	36.1	2.7	9.4
			13:34	19.8	7.7	33.7	36.1	2.7	9.2
22.5	Fine	Calm	13:21	19.8	7.7	33.7	36.0	2.7	9.2
			13:34	19.8	7.7	33.7	35.8	2.7	9.5

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	13:10	23.6	8.1	29.3	93.8	6.7	3.9
			13:23	23.6	8.1	29.3	93.7	6.7	3.7
11.5	Fine	Calm	13:15	20.6	7.7	32.6	44.1	3.3	8.0
			13:28	20.6	7.7	32.6	42.8	3.2	7.9
22.0	Fine	Calm	13:21	19.8	7.7	33.7	36.1	2.7	9.4
			13:34	19.8	7.7	33.7	36.1	2.7	9.2

	Name	Signature	Date
Conducted by:	Lee Man Hei		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

**Contract No. KL/2010/02**  
**Kai Tak Development**  
**- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)**

**Water Quality Monitoring Results at VH2 - Mid-Flood Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	14:00	24.1	8.5	28.9	106.0	7.6	3.7
			14:14	24.1	8.5	28.8	108.3	7.7	3.7
1.0	Fine	Calm	14:01	23.9	8.5	29.0	109.8	7.8	3.6
			14:15	23.9	8.5	29.0	109.7	7.8	3.5
1.5	Fine	Calm	14:01	23.7	8.5	29.1	109.9	7.9	3.5
			14:15	23.7	8.5	29.2	109.2	7.8	3.5
2.0	Fine	Calm	14:02	22.9	8.5	30.0	89.3	6.6	3.7
			14:16	23.0	8.5	29.8	88.2	6.4	3.6
2.5	Fine	Calm	14:02	23.0	8.5	29.8	88.3	6.4	3.7
			14:16	23.1	8.5	29.7	88.2	6.4	3.7
3.0	Fine	Calm	14:02	23.1	8.5	29.8	91.2	6.6	3.7
			14:16	23.1	8.5	29.7	90.1	6.5	3.7
3.5	Fine	Calm	14:02	22.7	8.5	30.1	86.8	6.3	3.6
			14:17	22.9	8.5	29.9	84.5	6.1	3.7
4.0	Fine	Calm	14:03	22.3	8.4	30.6	83.3	6.1	4.2
			14:17	22.3	8.4	30.6	81.3	5.9	4.2
4.5	Fine	Calm	14:03	21.7	8.4	31.4	77.8	5.7	4.3
			14:17	21.7	8.4	31.5	76.4	5.5	4.3
5.0	Fine	Calm	14:03	21.2	8.3	31.9	69.9	5.2	4.6
			14:17	21.2	8.3	32.0	67.0	4.9	4.6
5.5	Fine	Calm	14:04	20.4	8.3	33.0	59.1	4.4	4.7
			14:18	20.3	8.3	33.1	58.1	4.3	4.7
6.0	Fine	Calm	14:04	20.2	8.3	33.2	56.2	4.2	4.8
			14:18	20.3	8.3	33.1	55.5	4.1	4.8
6.5	Fine	Calm	14:04	20.0	8.3	33.5	54.6	4.1	5.1
			14:18	20.1	8.3	33.4	54.0	4.0	5.1
7.0	Fine	Calm	14:05	19.9	8.2	33.7	53.0	4.0	5.7
			14:19	19.8	8.2	33.7	52.7	3.9	6.0
7.5	Fine	Calm	14:05	19.7	8.2	33.8	52.1	3.9	6.6
			14:19	19.7	8.2	33.9	51.9	3.9	6.8
8.0	Fine	Calm	14:05	19.7	8.2	33.9	51.5	3.9	7.2
			14:19	19.7	8.2	33.9	51.4	3.9	7.6
8.5	Fine	Calm	14:05	19.6	8.1	34.0	51.2	3.8	8.6
			14:20	19.6	8.1	34.0	51.1	3.8	8.5
9.0	Fine	Calm	14:06	19.6	8.1	34.0	51.0	3.8	8.5
			14:20	19.6	8.1	34.0	50.8	3.8	8.4
9.5	Fine	Calm	14:06	19.6	8.0	34.0	50.8	3.8	8.4
			14:20	19.6	8.0	34.0	50.7	3.8	8.7
10.0	Fine	Calm	14:07	19.6	8.0	34.0	50.6	3.8	8.4
			14:21	19.6	8.0	34.0	50.6	3.8	8.3

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

### Water Quality Monitoring Results at VH2 - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
10.5	Fine	Calm	14:07	19.6	7.9	34.0	50.6	3.8	8.6
			14:21	19.6	7.9	34.0	50.6	3.8	8.6
11.0	Fine	Calm	14:07	19.6	7.9	34.0	50.4	3.8	9.0
			14:21	19.6	7.9	34.0	50.6	3.8	9.1
11.5	Fine	Calm	14:07	19.6	7.9	34.0	50.3	3.8	9.3
			14:22	19.6	7.9	34.0	50.3	3.8	9.2
12.0	Fine	Calm	14:08	19.6	7.9	34.0	50.3	3.8	9.3
			14:22	19.6	7.9	34.0	50.2	3.8	9.3
12.5	Fine	Calm	14:09	19.6	7.9	34.0	50.2	3.8	9.7
			14:22	19.6	8.0	34.0	49.9	3.7	8.5
13.0	Fine	Calm	14:10	19.6	8.0	34.0	50.0	3.8	8.8
			14:23	19.6	8.0	34.0	49.9	3.7	9.2
13.5	Fine	Calm	14:10	19.6	8.0	34.0	49.8	3.7	9.2
			14:23	19.6	8.0	34.0	49.8	3.7	9.6
14.0	Fine	Calm	14:10	19.6	8.0	34.0	49.8	3.7	9.7
			14:23	19.6	8.0	34.0	49.6	3.7	10.2
14.5	Fine	Calm	14:11	19.6	8.0	34.0	49.6	3.7	10.5
			14:23	19.6	8.1	34.0	49.5	3.7	10.7
15.0	Fine	Calm	14:11	19.6	8.1	34.0	49.5	3.7	10.7
			14:23	19.6	8.1	34.0	49.5	3.7	11.3
15.5	Fine	Calm	14:11	19.6	8.1	34.0	49.6	3.7	11.4
			14:24	19.6	8.1	34.0	49.4	3.7	11.7
16.0	Fine	Calm	14:12	19.6	8.1	34.0	49.2	3.7	11.6
			14:24	19.6	8.1	34.0	49.4	3.7	12.0
16.5	Fine	Calm	14:12	19.6	8.1	34.0	49.2	3.7	11.9
			14:24	19.6	8.1	34.0	49.2	3.7	12.0
17.0	Fine	Calm	14:12	19.6	8.1	34.0	49.1	3.7	12.2
			14:24	19.6	8.2	34.0	49.0	3.7	11.6
17.5	Fine	Calm	14:13	19.6	8.2	33.9	49.2	3.7	12.0
			14:25	19.6	8.2	33.9	49.1	3.7	11.1

### Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
1.0	Fine	Calm	14:01	23.9	8.5	29.0	109.8	7.8	3.5
			14:15	23.9	8.5	29.0	109.7	7.8	3.5
9.0	Fine	Calm	14:06	19.6	8.1	34.0	51.0	3.8	8.5
			14:20	19.6	8.1	34.0	50.8	3.8	8.4
17.0	Fine	Calm	14:12	19.6	8.1	34.0	49.1	3.7	12.2
			14:24	19.6	8.2	34.0	49.0	3.7	11.6

	Name	Signature	Date
Conducted by:	Lee Man Hei		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02  
 Kai Tak Development  
 – Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at WSD Intake at Cha Kwo Ling - Mid-Flood Tide



Sampling Date: 18 August 2014

Secchi Disc Depth: 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	11:54	27.1	7.6	28.5	103.7	7.0	1.1
			12:00	26.7	7.7	28.9	104.0	7.1	1.1
1.0	Fine	Calm	11:55	26.8	7.6	28.7	103.0	7.0	1.2
			12:01	26.6	7.7	29.1	101.9	7.0	1.2
1.5	Fine	Calm	11:55	26.5	7.6	28.9	98.1	6.7	1.4
			12:01	26.4	7.7	29.3	101.4	6.9	1.5
2.0	Fine	Calm	11:55	26.2	7.5	29.3	93.8	6.4	1.9
			12:01	26.2	7.7	29.5	94.6	6.5	1.8
2.5	Fine	Calm	11:55	26.1	7.5	29.4	93.9	6.6	1.6
			12:01	26.1	7.7	29.6	94.3	6.6	1.6
3.0	Fine	Calm	11:56	25.0	7.5	29.5	85.8	5.9	1.7
			12:01	25.9	7.6	29.7	83.6	5.7	1.8
3.5	Fine	Calm	11:56	25.8	7.5	29.6	85.0	5.9	1.7
			12:01	25.8	7.6	29.8	81.1	5.6	1.7
4.0	Fine	Calm	11:56	25.4	7.5	30.3	73.3	6.1	3.5
			12:01	25.6	7.6	30.3	73.2	5.0	3.6
4.5	Fine	Calm	11:58	24.5	7.5	31.5	68.1	4.6	5.7
			12:01	24.4	7.6	31.8	65.7	4.6	5.4
5.0	Fine	Calm	11:56	23.9	7.5	32.1	55.0	3.9	7.5
			12:01	23.8	7.6	32.4	55.2	3.9	6.6
5.5	Fine	Calm	11:58	23.6	7.5	32.4	43.2	3.0	8.0
			12:02	23.6	7.6	32.7	52.9	3.7	7.4
6.0	Fine	Calm	11:58	23.5	7.5	32.5	47.9	3.4	8.7
			12:02	23.4	7.6	32.9	43.9	3.5	7.7
6.5	Fine	Calm	11:58	23.4	7.5	32.7	45.0	3.3	9.9
			12:02	23.3	7.6	32.9	45.6	3.3	8.2
7.0	Fine	Calm	11:57	23.3	7.6	32.7	45.4	3.2	10.4
			12:02	23.3	7.6	33.0	45.2	3.3	8.7
7.5	Fine	Calm	11:57	23.2	7.6	32.8	35.6	2.6	10.4
			12:02	23.3	7.6	33.0	33.7	2.4	8.9
8.0	Fine	Calm	11:57	23.2	7.6	32.9	35.6	2.6	9.8
			12:02	23.2	7.6	33.1	33.6	2.4	8.5
8.5	Fine	Calm	11:57	23.1	7.6	33.0	35.9	2.6	10.0
			12:02	23.1	7.6	33.3	35.6	2.5	8.1

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
4.5	Fine	Calm	11:58	24.5	7.5	31.5	68.1	4.8	5.7
			12:01	24.4	7.6	31.8	65.7	4.6	5.4

	Name	Signature	Date
Conducted by:	Lam Ho Chun		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02  
 Kai Tak Development  
 - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at Tai Wan - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.5m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	12:43	23.3	8.2	31.5	79.4	5.7	50
			12:55	23.3	8.2	31.5	79.8	5.7	4.5
1.0	Fine	Calm	12:43	23.2	8.1	31.6	81.3	5.8	4.2
			12:57	23.1	8.1	31.6	83.7	5.8	4.3
1.5	Fine	Calm	12:50	23.1	8.1	31.6	79.7	5.7	4.2
			12:57	23.1	8.0	31.6	79.3	5.7	4.2
2.0	Fine	Calm	12:50	23.1	8.0	31.6	79.0	5.8	4.1
			12:57	23.1	8.0	31.7	79.0	5.6	4.7
2.5	Fine	Calm	12:50	23.0	8.0	31.7	78.2	5.6	4.7
			12:57	23.0	7.9	31.7	77.8	5.6	4.8
3.0	Fine	Calm	12:53	22.9	7.9	31.8	77.1	5.5	4.6
			12:58	22.9	7.8	31.7	76.4	5.5	4.6
3.5	Fine	Calm	12:51	22.8	7.8	31.8	76.1	5.5	4.7
			12:58	22.8	7.8	31.8	75.7	5.4	4.7
4.0	Fine	Calm	12:51	22.7	7.7	31.9	72.9	5.2	4.9
			12:58	22.7	7.7	32.0	70.6	5.1	4.9
4.5	Fine	Calm	12:51	22.6	7.7	32.1	69.2	5.0	5.2
			12:58	22.5	7.7	32.1	67.2	4.8	5.4
5.0	Fine	Calm	12:52	21.8	7.6	33.1	54.7	4.0	6.5
			12:58	21.7	7.6	33.1	53.7	3.9	6.3
5.5	Fine	Calm	12:52	21.7	7.6	33.2	51.1	3.7	5.9
			13:00	21.7	7.6	33.2	50.9	3.7	6.4
6.0	Fine	Calm	12:52	21.7	7.6	33.2	50.4	3.7	6.0
			13:00	21.6	7.6	33.2	50.3	3.7	6.0
6.5	Fine	Calm	12:53	21.5	7.5	33.4	43.8	3.6	5.5
			13:00	21.5	7.5	33.4	43.4	3.6	5.5
7.0	Fine	Calm	12:53	21.5	7.5	33.4	43.1	3.6	5.6
			13:00	21.5	7.5	33.4	43.8	3.6	5.7
7.5	Fine	Calm	12:53	21.4	7.5	33.5	47.2	3.4	7.2
			13:01	21.4	7.5	33.6	43.9	3.4	7.4
8.0	Fine	Calm	12:54	21.4	7.5	33.6	45.5	3.4	7.7
			13:01	21.3	7.5	33.6	45.0	3.4	7.7
8.5	Fine	Calm	12:54	21.3	7.5	33.7	45.6	3.3	8.1
			13:01	21.2	7.5	33.8	45.3	3.3	8.5
9.0	Fine	Calm	12:54	21.2	7.5	33.9	45.1	3.3	8.6
			13:01	21.2	7.5	33.9	45.1	3.3	8.6
9.5	Fine	Calm	12:55	21.2	7.4	33.9	45.6	3.3	7.3
			13:02	21.1	7.4	33.9	45.2	3.3	7.1

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
5.0	Fine	Calm	12:52	21.8	7.8	33.1	54.7	4.0	6.5
			12:59	21.7	7.8	33.1	63.7	3.9	6.3

Conducted by:	Name	Signature	Date
Lee Man Hei		18-Aug-14	
W.K. Tang		18-Aug-14	

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

### Water Quality Monitoring Results at WSD Intake at Quarry Bay - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	13:41	23.8	9.0	28.6	95.9	6.9	3.3
			13:49	23.8	9.0	28.6	95.8	6.9	3.5
1.0	Fine	Calm	13:42	23.7	9.0	28.8	95.6	6.9	3.4
			13:49	23.8	9.0	28.8	96.2	6.9	3.4
1.5	Fine	Calm	13:42	23.5	9.0	29.0	96.8	7.0	3.5
			13:49	23.5	9.0	29.0	97.2	7.0	3.4
2.0	Fine	Calm	13:42	23.4	9.0	29.1	97.5	7.0	3.4
			13:49	23.4	9.0	29.1	96.4	7.0	3.5
2.5	Fine	Calm	13:43	22.8	8.9	29.7	85.2	6.2	3.8
			13:50	22.6	8.9	30.0	83.3	6.1	3.9
3.0	Fine	Calm	13:43	22.1	8.9	30.7	74.6	5.5	4.2
			13:50	22.1	8.9	30.7	72.8	5.3	4.3
3.5	Fine	Calm	13:43	22.0	8.9	30.7	69.0	5.0	4.4
			13:50	22.0	8.9	30.7	68.0	5.0	4.4
4.0	Fine	Calm	13:44	22.0	8.9	30.8	67.2	4.9	4.4
			13:51	22.0	8.9	30.8	66.3	4.9	4.4
4.5	Fine	Calm	13:44	21.7	8.8	31.3	64.8	4.8	4.5
			13:51	21.5	8.8	31.4	63.4	4.7	4.6
5.0	Fine	Calm	13:44	21.0	8.7	32.2	57.6	4.3	5.5
			13:51	21.0	8.7	32.2	56.0	4.1	5.5
5.5	Fine	Calm	13:45	20.6	8.7	32.6	50.2	3.7	6.8
			13:52	20.7	8.6	32.5	49.3	3.7	6.7
6.0	Fine	Calm	13:45	20.5	8.6	32.8	47.8	3.6	6.9
			13:52	20.5	8.6	32.8	47.5	3.5	7.1
6.5	Fine	Calm	13:45	20.3	8.5	33.1	47.2	3.5	7.1
			13:52	20.3	8.5	33.1	47.3	3.5	7.1
7.0	Fine	Calm	13:45	20.1	8.5	33.3	47.5	3.5	7.4
			13:53	20.1	8.5	33.3	47.5	3.5	7.5
7.5	Fine	Calm	13:46	20.1	8.4	33.4	47.6	3.6	7.6
			13:53	20.1	8.4	33.4	47.6	3.6	7.6
8.0	Fine	Calm	13:46	20.0	8.3	33.5	47.4	3.5	8.2
			13:53	20.0	8.3	33.5	47.3	3.5	8.1
8.5	Fine	Calm	13:46	19.9	8.3	33.6	47.1	3.5	8.5
			13:53	19.9	8.3	33.6	47.1	3.5	8.5
9.0	Fine	Calm	13:47	19.8	8.2	33.8	47.6	3.6	9.0
			13:54	19.8	8.2	33.8	47.6	3.6	9.0

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

**Water Quality Monitoring Results at WSD Intake at Quarry Bay - Mid-Flood Tide**

**Sampling Date:** 18 August 2014

**Secchi Disc Depth:** 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
9.5	Fine	Calm	13:47	19.7	8.2	33.8	48.4	3.6	10.3
			13:54	19.7	8.2	33.8	48.4	3.6	10.3
10.0	Fine	Calm	13:47	19.7	8.1	33.9	48.7	3.7	12.5
			13:54	19.7	8.1	33.9	48.9	3.7	12.7
10.5	Fine	Calm	13:48	19.7	8.1	33.9	48.9	3.7	14.0
			13:55	19.7	8.1	33.9	49.0	3.7	14.0

**Water Quality Monitoring Results (Sampling Depth)**

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
5.5	Fine	Calm	13:45	20.6	8.7	32.6	50.2	3.7	6.8
			13:52	20.7	8.6	32.5	49.3	3.7	6.7

	Name	Signature	Date
Conducted by:	Lee Man Hei		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

Contract No. KL/2010/02

Kai Tak Development

– Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at WSD Intake at Sai Wan Ho - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
0.5	Fine	Calm	14:31	24.0	8.4	28.9	107.7	7.7	3.5
			14:40	24.0	8.4	28.9	108.1	7.7	3.4
1.0	Fine	Calm	14:32	23.9	8.3	29.0	108.6	7.8	3.5
			14:41	23.9	8.3	29.0	108.5	7.8	3.4
1.5	Fine	Calm	14:32	23.9	8.3	29.0	108.1	7.7	3.4
			14:41	23.8	8.2	29.0	107.8	7.7	3.3
2.0	Fine	Calm	14:33	23.8	8.2	29.1	105.9	7.6	3.4
			14:41	23.8	8.2	29.1	105.9	7.6	3.4
2.5	Fine	Calm	14:33	23.7	8.1	29.2	104.2	7.5	3.6
			14:42	23.6	8.1	29.2	103.7	7.4	3.6
3.0	Fine	Calm	14:33	23.5	8.1	29.3	98.8	7.1	3.5
			14:42	23.5	8.1	29.3	98.7	7.1	3.4
3.5	Fine	Calm	14:34	22.6	8.0	30.2	74.8	5.4	3.4
			14:42	22.6	8.0	30.2	72.3	5.3	3.5
4.0	Fine	Calm	14:34	21.3	8.0	31.9	57.3	4.2	4.4
			14:43	21.1	8.0	32.1	56.2	4.2	4.4
4.5	Fine	Calm	14:35	20.7	8.0	32.6	52.9	3.9	4.7
			14:43	20.7	8.0	32.6	51.5	3.8	4.6
5.0	Fine	Calm	14:35	20.5	8.0	32.8	49.0	3.6	4.9
			14:43	20.6	8.0	32.7	48.8	3.6	4.9
5.5	Fine	Calm	14:35	20.3	8.0	33.1	48.0	3.6	5.3
			14:43	20.4	7.9	33.0	48.3	3.6	5.2
6.0	Fine	Calm	14:36	20.1	7.9	33.4	48.3	3.6	5.4
			14:44	20.1	7.9	33.4	48.4	3.6	5.4
6.5	Fine	Calm	14:36	19.9	7.9	33.6	48.9	3.7	6.0
			14:44	19.9	7.9	33.6	49.0	3.7	5.9
7.0	Fine	Calm	14:36	19.9	7.9	33.7	49.2	3.7	6.2
			14:44	19.9	7.8	33.7	49.4	3.7	6.3
7.5	Fine	Calm	14:36	19.8	7.8	33.7	49.5	3.7	6.5
			14:45	19.8	7.8	33.7	49.5	3.7	6.5
8.0	Fine	Calm	14:37	19.7	7.8	33.9	49.4	3.7	6.9
			14:45	19.7	7.8	33.9	49.5	3.7	7.0
8.5	Fine	Calm	14:37	19.6	7.8	33.9	49.6	3.7	7.3
			14:45	19.6	7.7	34.0	49.6	3.7	7.4
9.0	Fine	Calm	14:37	19.6	7.7	34.0	49.8	3.7	7.6
			14:45	19.6	7.7	34.0	49.8	3.7	7.8
9.5	Fine	Calm	14:38	19.6	7.7	34.0	49.8	3.7	7.9
			14:46	19.6	7.7	34.0	49.8	3.7	8.4
10.0	Fine	Calm	14:38	19.6	7.7	34.0	49.8	3.7	8.3
			14:46	19.6	7.7	34.0	49.6	3.7	8.2

Remark: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

Contract No. KL/2010/02

Kai Tak Development

- Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Water Quality Monitoring Results at WSD Intake at Sai Wan Ho - Mid-Flood Tide

Sampling Date: 18 August 2014

Secchi Disc Depth: 2.0m

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
10.5	Fine	Calm	14:38	19.6	7.6	34.0	49.6	3.7	8.3
			14:46	19.6	7.6	34.0	49.6	3.7	8.3
11.0	Fine	Calm	14:38	19.6	7.7	34.0	49.6	3.7	8.7
			14:47	19.6	7.7	34.0	49.6	3.7	8.5
11.5	Fine	Calm	14:39	19.6	7.7	34.0	49.6	3.7	9.0
			14:47	19.6	7.7	34.0	49.6	3.7	8.9
12.0	Fine	Calm	14:39	19.6	7.7	34.0	49.5	3.7	10.3
			14:47	19.6	7.7	34.0	49.5	3.7	9.6
12.5	Fine	Calm	14:39	19.6	7.7	34.0	49.3	3.7	10.7
			14:48	19.6	7.7	34.0	49.3	3.7	10.6

Water Quality Monitoring Results (Sampling Depth)

Water Depth (m)	Weather Condition	Sea Condition*	Sampling Time	Water Temperature (°C)	pH	Salinity ppt	DO Saturation (%)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
6.5	Fine	Calm	14:36	19.9	7.9	33.6	48.9	3.7	6.0
			14:44	19.9	7.9	33.6	49.0	3.7	5.9

	Name	Signature	Date
Conducted by:	Lee Man Hei		18-Aug-14
Checked by:	W.K. Tang		18-Aug-14

---

---

**APPENDIX E2**  
**IN-SITU MEASUREMENT RESULTS**  
**FOR ODOUR SAMPLING**

---

---

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)

Odour Monitoring Results on 22 August 2014

Location	Weather Condition	Sea Condition*	Sampling Time	Water Depth (m)	Sampling Depth (m)	Ambient Air Temperature (°C)	Water Temperature (°C)	Redox Potential (mV)	pH		Salinity (ppt)		DO Saturation (%)		Dissolved Oxygen (mg/L)	
									Value	Average	Value	Average	Value	Average	Value	Average
SA1	Sunny	Calm	12:50	3.4	2.4	30.9	25.0	-231	6.9	6.9	32.5	32.5	18.6	18.6	1.3	1.3
						31.0	25.1	-226	6.9		32.4	32.4	18.6	18.6	1.3	1.3
SA2	Sunny	Calm	13:08	3.5	2.5	31.6	24.6	-228	7.2	7.2	32.4	32.5	23.5	23.8	1.6	1.7
						31.6	24.5	-226	7.2		32.6	32.6	24.1	24.1	1.7	1.7
SA3	Sunny	Calm	13:15	3.8	2.8	32.0	25.0	-220	7.1	7.1	31.9	31.9	25.1	25.0	1.7	1.7
						32.0	25.0	-213	7.1		31.9	31.9	24.8	24.8	1.7	1.7
SA4	Sunny	Calm	13:24	5.5	4.5	32.0	24.1	-204	7.3	7.3	33.0	33.0	27.1	27.3	1.9	1.9
						32.0	24.1	-206	7.3		33.0	33.0	27.4	27.4	1.9	1.9
SA5	Sunny	Calm	13:29	3.9	2.9	32.1	24.8	-58	7.4	7.4	31.7	31.7	37.6	38.8	2.6	2.7
						32.0	24.8	-63	7.4		31.7	31.7	40.0	40.0	2.8	2.7
SA6	Sunny	Calm	13:35	6.0	5.0	30.3	23.7	-73	7.4	7.4	33.5	33.6	31.5	31.5	2.2	2.2
						30.5	23.7	-63	7.4		33.7	33.7	31.4	31.4	2.2	2.2
SA7	Sunny	Calm	13:43	6.2	5.2	30.0	23.5	24	7.5	7.5	33.7	33.7	60.7	59.9	4.3	4.2
						30.0	23.5	14	7.5		33.7	33.7	59.0	59.0	4.1	4.2
SA8	Sunny	Calm	13:52	6.1	5.1	29.5	23.3	-11	7.5	7.5	34.0	34.0	57.0	57.7	4.0	4.0
						29.5	23.3	-6	7.5		34.1	34.1	58.3	58.3	4.1	4.0
SA9	Sunny	Calm	13:58	6.8	5.8	29.8	23.5	17	7.6	7.5	33.7	33.7	55.6	56.3	4.6	4.3
						29.8	23.6	22	7.5		33.7	33.7	57.0	57.0	3.9	4.3
SA10	Sunny	Calm	12:10	6.8	5.8	30.1	25.4	58	7.7	7.7	30.6	30.7	76.9	77.8	5.3	5.4
						30.2	25.5	56	7.7		30.8	30.8	78.7	78.7	5.4	5.4
SA11	Sunny	Calm	11:10	5.5	4.5	29.7	25.3	43	7.5	7.5	29.8	29.9	92.5	89.5	6.4	6.2
						29.7	25.3	42	7.5		30.0	30.0	86.5	86.5	6.0	6.2
SA12	Sunny	Calm	11:23	7.0	6.0	30.1	25.6	62	7.7	7.7	28.9	29.4	91.2	90.3	6.3	6.2
						30.2	25.7	57	7.7		29.9	29.9	89.3	89.3	6.2	6.2
SA13	Sunny	Calm	11:41	5.0	4.0	30.1	25.7	38	7.5	7.5	30.3	30.3	87.3	87.3	6.0	6.0
						30.1	25.7	34	7.6		30.3	30.3	87.2	87.2	6.0	6.0

	Name	Signature	Date
Conducted by:	Lam Ho Chun	Chun	22/08/2014
Checked by:	Tang Wing Kwai	Kwai	22/08/2014

Remark: \*Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher.

---

---

**APPENDIX E3**  
**IN-SITU MEASUREMENT RESULTS**  
**FOR SEDIMENT MONITORING**

---

---



Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter  
Improvement Works (Phase 1)

Sediment Monitoring Field Record Sheet

Sampling Date: 30-Aug-14

Sampling Location	Weather Condition	Co-ordinate Easting / Northing	Starting Time	Water Depth (m)	Remarks
SA1	Sunny	838744.13 / 820311.91	17:52	2.8	
SA2	Sunny	838840.95 / 820030.07	17:00	4.0	
SA3	Sunny	839163.99 / 819942.90	15:55	4.5	
SA4	Sunny	839407.66 / 819537.90	18:37	6.2	
SA5	Sunny	839580.35 / 819512.47	19:41	6.5	
SA6	Sunny	839647.87 / 819329.45	20:50	6.5	
SA7	Sunny	840122.60 / 819275.72	15:00	6.5	
SA8	Sunny	840270.71 / 819015.35	14:16	7.0	
SA9	Sunny	840479.55 / 818798.14	13:05	8.0	
SA10	Sunny	838694.90 / 819582.08	12:15	7.5	
SA11	Sunny	838138.20 / 820038.77	09:32	5.0	
SA12	Sunny	**838020.19 / 819711.92	10:23	7.5	Relocation due to obstruction of fishing net
SA13	Sunny	837857.15 / 819436.94	11:34	5.0	

	Name	Signature	Date
Conducted by:	Lee Man Hei		30-Aug-14
Checked by:	Tang Wing Kwai		30-Aug-14

---

---

**APPENDIX E4**  
**ODOUR PATROL RESULT**

---

---

General Information

Patrol Locations: Within Kai Tak Development, and Ma Tau Kok Waterfront

Date: 15, 24 and 25 July 2014

Temperature: 28.8 - 33.8°C (15 July 2014), 27.9 - 31.0°C (24 July 2014) and 26.8 - 32.8°C (25 July 2014) (King's Park)

Humidity: 59 - 83% (15 July 2014), 77 - 87% (24 July 2014) and 62 - 84% (25 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
1	09:08	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	3.7	(3)
2	09:16	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.9	(3)
3	09:20	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	2.3	(3)
4	09:22	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.7	(3)
5	09:33	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( NW )	2.7	(3)
6	09:35	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	4.1	(3)
7	11:51	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	1.8	(3)
8	09:49	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( W )	2.7	(3)
9	09:51	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( W )	2.1	(3)
10	09:53	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind ( W )	1.2	(3)
11	09:55	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( SW )	3.3	(3)
12	09:58	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	4.0	(3)
13	10:16	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	0.7	(3)
14	10:12	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	1.3	(3)
15	10:09	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.8	(3)
16	10:08	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	3.1	(3)
17	10:06	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.8	(3)
19	10:01	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
18	10:03	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	2.9	(3)
20	11:02	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.7	(2)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 15 July 2014 (3) Conducted on 24 July 2014

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: OI-1 / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 15, 24 and 25 July 2014

Temperature: 28.8 - 33.8°C (15 July 2014), 27.9 - 31.0°C (24 July 2014) and 26.8 - 32.8°C (25 July 2014) (King's Park)

Humidity: 59 - 83% (15 July 2014), 77 - 87% (24 July 2014) and 62 - 84% (25 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
21	11:26	High Tide / Low-Tide	Sunny / Fine  Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	2.2	(3)
22	11:18	High Tide / Low-Tide	Sunny / Fine  Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	1.5	(3)
23	11:16	High Tide / Low-Tide	Sunny / Fine  Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	0.7	(3)
24	11:14	High Tide / Low-Tide	Sunny / Fine  Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	0.3	(3)
25	11:12	High Tide / Low-Tide	Sunny / Fine  Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	2.2	(3)
26	11:10	High Tide / Low-Tide	Sunny / Fine  Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	2.6	(3)
27	10:58	High Tide / Low-Tide	Sunny / Fine  Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	2.8	(3)
28	10:52	High Tide / Low-Tide	Sunny / Fine  Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	2.8	(3)
29	13:20	High Tide / Low-Tide	Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( NE )	2.5	(2)
30	13:25	High Tide / Low-Tide	Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	0.8	(2)
31	10:48	High Tide / Low-Tide	Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0	(2)
32	10:40	High Tide / Low-Tide	Sunny / Fine  Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N )	1.9	(2)
33	10:58	High Tide / Low-Tide	Sunny / Fine  Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.9	(2)
34	11:30	High Tide / Low-Tide	Sunny  Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.3	(2)
35	11:34	High Tide / Low-Tide	Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	2.6	(2)
36	10:17	High Tide / Low-Tide	Sunny / Fine  Rainy	① 1/2/3/4	Engino Oil	Floating oil	Intermittent / Continuous	Downwind / Upwind ( N/A )	0	(2)
37	09:54	High Tide / Low-Tide	Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.5	(2)
38	09:58	High Tide / Low-Tide	Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0	(2)
39	10:05	High Tide / Low-Tide	Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( NW )	1.6	(2)
40	10:07	High Tide / Low-Tide	Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( W )	0.4	(2)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance;

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Sources: Exposed sediment, water or sewage, floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 15 July 2014 (3) Conducted on 24 July 2014

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: OI-1 / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 15, 24 and 25 July 2014

Temperature: 28.8 - 33.8°C (15 July 2014), 27.9 - 31.0°C (24 July 2014) and 26.8 - 32.8°C (25 July 2014) (King's Park)

Humidity: 59 - 83% (15 July 2014), 77 - 87% (24 July 2014) and 62 - 84% (25 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
41	12:50	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind (SW)	1.1	(2)
42	12:33	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind (SE)	1.0	(2)
43	12:30	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind (SW)	0.3	(2)
44	12:28	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind (SW)	1.3	(2)
45	12:13	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind (SE)	1.0	(2)
46	12:05	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind (SE)	10.0	(2)
47	12:04	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind (SE)	1.0	(2)
48	11:48	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind (SE)	10.0	(2)
49	11:12	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind (SE)	0.0	(2)
50	11:16	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind (N/A)	0.4	(2)
51	11:18	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind (SW)	0.7	(2)
52	11:10	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind (S)	1.9	(2)
53	11:50	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind (S)	0.4	(2)
54	11:55	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind (S)	3.0	(2)
55	12:09	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind (N/A)	0.0	(2)
56	12:15	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind (SE)	1.4	(2)
57	12:20	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind (S)	1.7	(2)
58	12:21	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind (S)	2.3	(2)
59	12:34	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	Chemical Toilet nearby	Intermittent / Continuous	Downwind / Upwind (N/A)	0.0	(2)
60	12:49	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind (E)	1.7	(2)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammoniacal, dischargeable odour, putrefaction, sharp, pungent, fish, Irritating, fruit, Vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 15 July 2014 (3) Conducted on 24 July 2014

	Name	Signature
Conducted by:	Tang Wing Kwai	
Checked by:	Hony Loung	

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: OI-1 / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 15, 24 and 25 July 2014

Temperature: 28.8 - 33.8°C (15 July 2014), 27.9 - 31.0°C (24 July 2014) and 26.8 - 32.8°C (25 July 2014) (King's Park)

Humidity: 59 - 83% (15 July 2014), 77 - 87% (24 July 2014) and 62 - 84% (25 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
A1	08:48	High Tide / Low Tide	Sunny / Fine <del>Cloudy</del> / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind- ( SW )	3.7	(3)
A2	08:59	High Tide / Low Tide	Sunny / Fine <del>Cloudy</del> / Rainy	0 ① 2/3/4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind- ( SW )	1.7	(3)
A3	09:02	High Tide / Low Tide	Sunny / Fine <del>Cloudy</del> / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind- ( SW )	4.5	(3)
A4	10:00	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sawago	sewage treatment plant	Intermittent / Continuous	Downwind / Upwind- ( SW )	1.4	(3)
A5	09:20	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.6	(4)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;


3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Sources: Exposed sediment, water or envelope; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objective background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 15 July 2014 (3) Conducted on 24 July 2014 (4) Conducted 25 July 2014

	Name	Signature
Conducted by:	Tang Wing Kwai	
Checked by:	Henry Loung	

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

## Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: OI-1 / -OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 14 and 15 July 2014

Temperature: 26.1 - 31.6°C (14 July 2014) and 28.8 - 33.8°C (15 July 2014)(King's Park)

Humidity: 71 - 93% (14 July 2014) and 59 - 83% (15 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind	Wind Speed (m/s)	Remarks
								Direction		
1	16:46	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① / 2 / 3 / 4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind( W )	2.9	(2)
2	17:21	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① ② / 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( W )	1.3	(2)
3	17:15	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① ② / 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( W )	0.7	(2)
4	17:11	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① ② / 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( W )	1.7	(2)
5	17:37	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① / 2 / 3 / 4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind ( NW )	1.6	(2)
6	17:39	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① / 2 / 3 / 4	fishy smell	exposed shores and marine water	Intermittent / Continuous	Downwind / Upwind( S )	2.0	(2)
7	18:49	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① / 2 / 3 / 4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( SE )	0.8	(2)
8	19:07	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① / 2 / 3 / 4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( S )	1.1	(2)
9	19:10	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① / 2 / 3 / 4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( S )	1.7	(2)
10	19:13	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① / 2 / 3 / 4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind( S )	1.3	(2)
11	19:16	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① / 2 / 3 / 4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind( S )	1.6	(2)
12	19:18	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① ② / 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	0.7	(2)
13	19:51	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① / 2 / 3 / 4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind( S )	1.4	(2)
14	19:45	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① / 2 / 3 / 4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind( E )	0.4	(2)
15	19:39	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① / 2 / 3 / 4	fishy smell	exposed shores and marine water	Intermittent / Continuous	Downwind / Upwind ( S )	0.3	(2)
16	19:37	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① ② / 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	2.6	(2)
17	19:33	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① ② / 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.3	(2)
18	19:26	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① ② / 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.7	(2)
19	19:23	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① ② / 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(2)
20	16:35	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① ② / 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.4	(3)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objective background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 14 July 2014 (3) Conducted on 15 July 2014

## Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: OI-1 / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 14 and 15 July 2014

Temperature: 26.1 - 31.6°C (14 July 2014) and 28.8 - 33.8°C (15 July 2014) (King's Park)

Humidity: 71 - 93% (14 July 2014) and 59 - 83% (15 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
21	18:41	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	rubbish smell	exposed shores	Intermittent / Continuous	Downwind / Upwind ( S )	1.5	(2)
22	18:29	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	fishy smell	exposed shores	Intermittent / Continuous	Downwind / Upwind( E )	1.7	(2)
23	18:27	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	rubbish and fishy smell	exposed shores	Intermittent / Continuous	Downwind / Upwind ( S )	1.5	(2)
24	18:25	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	rubbish smell	exposed shores	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(2)
25	18:22	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	rubbish smell	exposed shores	Intermittent / Continuous	Downwind / Upwind ( SW )	1.2	(2)
26	18:18	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.9	(2)
27	18:08	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(2)
28	18:00	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind( SE )	2.9	(2)
29	19:00	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	0.9	(3)
30	19:04	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.3	(3)
31	16:19	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	0.7	(3)
32	16:14	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	0.5	(3)
33	16:29	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.1	(3)
34	17:02	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.1	(3)
35	17:08	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.3	(3)
36	19:19	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
37	19:24	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	0.5	(3)
38	19:28	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	0.6	(3)
39	19:37	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	0.6	(3)
40	19:41	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1 2 3 4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( S )	1.1	(3)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterized or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Sources: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 14 July 2014 (3) Conducted on 15 July 2014

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: OI-1 / -OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 14 and 15 July 2014

Temperature: 26.1 - 31.6°C (14 July 2014) and 28.8 - 33.8°C (15 July 2014)(King's Park)

Humidity: 71 - 93% (14 July 2014) and 59 - 83% (15 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind	Wind	Remarks
								Direction	Speed (m/s)	
41	18:32	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
42	18:14	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
43	18:09	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( S )	0.8	(3)
44	18:07	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	1.2	(3)
45	17:46	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( SE )	1.1	(3)
46	17:37	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
47	17:35	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	0.4	(3)
48	17:20	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( W )	0.2	(3)
49	16:46	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( E )	0.5	(3)
50	16:51	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.8	(3)
51	16:53	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.6	(3)
52	16:44	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( E )	0.5	(3)
53	17:22	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
54	17:26	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( E )	0.4	(3)
55	17:45	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
56	17:49	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.6	(3)
57	17:55	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( S )	0.2	(3)
58	17:58	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( S )	0.5	(3)
59	18:19	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
60	18:30	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2 / 3 / 4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	0.0	(3)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterized or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;


3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Sources: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objective background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 14 July 2014 (3) Conducted on 15 July 2014

	Name	Signature
Conducted by:	Tang Wing Kwal	
Checked by:	Henry Leung	

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: OI-1 / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 14 and 15 July 2014

Temperature: 26.1 - 31.6°C (14 July 2014) and 28.8 - 33.8°C (15 July 2014)(King's Park)

Humidity: 71 - 93% (14 July 2014) and 59 - 83% (15 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
								Intermittent / Continuous	Downwind / Upwind( SW )	
A1	16:34	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 (1) 2/3/4	fishy smell and seawater smell	exposed sediment	Intermittent / Continuous	Downwind / Upwind( SW )	2.2	(1) (2)
A2	16:27	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 (1) 2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( SW )	1.9	(2)
A3	16:23	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 (1) 2/3/4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind( W )	1.8	(2)
A4	16:04	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 (1) 2/3/4	sewage	sewage treatment plant	Intermittent / Continuous	Downwind / Upwind( S )	1.0	(2)
A5	16:15	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 (1) 2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	2.8	(2)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;


3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 14 July 2014 (3) Conducted on 15 July 2014

	Name	Signature
Conducted by:	Tang Wing Kwal	
Checked by:	Henry Leung	

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 15, 24 and 25 July 2014

Temperature: 28.8 - 33.8°C (15 July 2014), 27.9 - 31.0°C (24 July 2014) and 26.8 - 32.8°C (25 July 2014) (King's Park)

Humidity: 59 - 83% (15 July 2014), 77 - 87% (24 July 2014) and 62 - 84% (25 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
1	09:08	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( W )	3.7	(3)
2	09:18	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	0.9	(3)
3	09:20	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	2.3	(3)
4	09:22	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	1.7	(3)
5	09:33	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( NW )	2.7	(3)
6	09:35	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	4.1	(3)
7	11:51	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( W )	1.8	(3)
8	09:49	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sawago	marine water	Intermittent / Continuous	Downwind / Upwind( W )	2.7	(3)
9	09:51	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sawage	marine water	Intermittent / Continuous	Downwind / Upwind( W )	2.1	(3)
10	09:53	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind( W )	1.2	(3)
11	09:55	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sawago	marine water	Intermittent / Continuous	Downwind / Upwind( SW )	3.3	(3)
12	09:58	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	4.0	(3)
13	10:18	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	0.7	(3)
14	10:12	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	1.3	(3)
15	10:08	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.8	(3)
16	10:08	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	3.1	(3)
17	10:08	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.8	(3)
19	10:01	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
18	10:03	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	2.9	(3)
20	11:02	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.7	(2)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, Irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 15 July 2014 (3) Conducted on 24 July 2014

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: -OI-1 / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 15, 24 and 25 July 2014

Temperature: 28.8 - 33.8°C (15 July 2014), 27.9 - 31.0°C (24 July 2014) and 26.8 - 32.8°C (25 July 2014) (King's Park)

Humidity: 59 - 83% (15 July 2014), 77 - 87% (24 July 2014) and 62 - 84% (25 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
21	11:26	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	2.2	(3)
22	11:18	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	1.5	(3)
23	11:16	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	0.7	(3)
24	11:14	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	0.3	(3)
25	11:12	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	2.2	(3)
26	11:10	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	2.6	(3)
27	10:58	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	2.8	(3)
28	10:52	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	2.9	(3)
29	13:20	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( NE )	2.5	(2)
30	13:25	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	0.8	(2)
31	10:48	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0	(2)
32	10:40	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N )	1.9	(2)
33	10:58	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.9	(2)
34	11:30	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.3	(2)
35	11:34	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	2.6	(2)
36	10:17	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	Engine Oil	Floating oil	Intermittent / Continuous	Downwind / Upwind ( N/A )	0	(2)
37	09:54	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.5	(2)
38	09:56	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0	(2)
39	10:05	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( NW )	1.6	(2)
40	10:07	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( W )	0.4	(2)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance;

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammoniacal, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objective background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 15 July 2014 (3) Conducted on 24 July 2014

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: -O1- / O1-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 15, 24 and 25 July 2014

Temperature: 28.8 - 33.8°C (15 July 2014), 27.9 - 31.0°C (24 July 2014) and 26.8 - 32.8°C (25 July 2014) (King's Park)

Humidity: 59 - 83% (15 July 2014), 77 - 87% (24 July 2014) and 62 - 84% (25 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
41	12:50	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.1	(2)
42	12:33	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( SE )	1.0	(2)
43	12:30	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SW )	0.3	(2)
44	12:28	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SW )	1.3	(2)
45	12:13	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( SE )	1.0	(2)
46	12:05	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	10.0	(2)
47	12:04	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( SE )	1.0	(2)
48	11:48	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	10.0	(2)
49	11:12	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( SE )	0.0	(2)
50	11:16	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.4	(2)
51	11:18	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.7	(2)
52	11:10	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( S )	1.9	(2)
53	11:50	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( S )	0.4	(2)
54	11:55	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( S )	3.0	(2)
55	12:09	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(2)
56	12:15	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.4	(2)
57	12:20	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	1.7	(2)
58	12:21	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( S )	2.3	(2)
59	12:34	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	Chemical Toilet nearby	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(2)
60	12:49	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	1.7	(2)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;


3 - Strong identifiable, likely to have odour nuisance;

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objective background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 15 July 2014 (3) Conducted on 24 July 2014

	Name	Signature
Conducted by:	Leo Man Hei	
Checked by:	Henry Loung	

General InformationPatrol Locations: Within Kai Tak Development and Ma Tau Kok WaterfrontDate: 15, 24 and 25 July 2014Temperature: 28.8 - 33.8°C (15 July 2014), 27.9 - 31.0°C (24 July 2014) and 26.8 - 32.8°C (25 July 2014) (King's Park)Humidity: 59 - 83% (15 July 2014), 77 - 87% (24 July 2014) and 62 - 84% (25 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
A1	08:48	High Tide / Low-Tide	Sunny / Fine <u>Cloudy</u> / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind-( SW )	3.7	(3)
A2	08:59	High Tide / Low-Tide	Sunny / Fine <u>Cloudy</u> / Rainy	0 ① 2/3/4	fishy smell and seawater smell	marine water	Intermittent / Continuous	Downwind / Upwind-( SW )	1.7	(1) (3)
A3	09:02	High Tide / Low-Tide	Sunny / Fine <u>Cloudy</u> / Rainy	② 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind-( SW )	4.5	(3)
A4	10:00	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0/① 2/3/4	sewage	sewage treatment plant	Intermittent / Continuous	Downwind / Upwind-( SW )	1.4	(3)
A5	09:20	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	③ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind-( SW )	1.6	(4)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;


3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The excavator smell is considered an non-objective background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 15 July 2014 (3) Conducted on 24 July 2014 (4) Conducted 25 July 2014

	Name	Signature
Conducted by:	Loo Man Hei	
Checked by:	Honny Leung	

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 14 and 15 July 2014

Temperature: 26.1 - 31.6°C (14 July 2014) and 28.8 - 33.8°C (15 July 2014)(King's Park)

Humidity: 71 - 93% (14 July 2014) and 59 - 83% (15 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind	Wind	Remarks
								Direction	Speed (m/s)	
1	16:46	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ①/2/3/4	fishy and seawater smell	marine water	Intermittent / Continuous	Downwind / Upwind-( W )	2.9	(1) (2)
2	17:21	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind-( W )	1.3	(2)
3	17:15	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind-( W )	0.7	(2)
4	17:11	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind-( W )	1.7	(2)
5	17:37	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ①/2/3/4	fishy and seawater smell	marine water	Intermittent / Continuous	Downwind / Upwind-( W )	1.6	(1)(2)
6	17:39	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	fishy and seawater smell	exposed shores and marine water	Intermittent / Continuous	Downwind / Upwind-( NW )	2.0	(1)(2)
7	18:49	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 ①/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind-( SE )	0.8	(2)
8	19:07	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind-( S )	1.1	(2)
9	19:10	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind-( S )	1.7	(2)
10	19:13	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind-( S )	1.3	(2)
11	19:16	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind-( S )	1.6	(2)
12	19:18	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind-( SW )	0.7	(2)
13	19:51	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind-( S )	1.4	(2)
14	19:45	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind-( E )	0.4	(2)
15	19:39	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	fishy smell	exposed shores and marine water	Intermittent / Continuous	Downwind / Upwind( S )	0.3	(2)
16	19:37	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	2.6	(2)
17	19:33	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	1.3	(2)
18	19:26	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	0.7	(2)
19	19:23	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( N/A )	0.0	(2)
20	16:35	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	0.4	(3)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance;

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objective background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 14 July 2014 (3) Conducted on 15 July 2014

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: -OI-1- / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 14 and 15 July 2014

Temperature: 26.1 - 31.6°C (14 July 2014) and 28.8 - 33.8°C (15 July 2014)(King's Park)

Humidity: 71 - 93% (14 July 2014) and 59 - 83% (15 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind	Wind	Remarks
								Direction	Speed (m/s)	
21	18:41	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	rubbish smell	exposed shores	Intermittent / Continuous	Downwind / Upwind( S )	1.5	(2)
22	18:29	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	fishy smell	exposed shores	Intermittent / Continuous	Downwind / Upwind( E )	1.7	(2)
23	18:27	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	rubbish and fishy smell	exposed shores	Intermittent / Continuous	Downwind / Upwind( S )	1.5	(2)
24	18:25	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	rubbish smell	exposed shores	Intermittent / Continuous	Downwind / Upwind( N/A )	0.0	(2)
25	18:22	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	rubbish smell	exposed shores	Intermittent / Continuous	Downwind / Upwind( SW )	1.2	(2)
26	18:18	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	1.9	(2)
27	18:06	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( N/A )	0.0	(2)
28	18:00	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind( SE )	2.9	(2)
29	19:00	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	0.9	(3)
30	19:04	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.3	(3)
31	19:19	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	0.7	(3)
32	19:14	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	0.5	(3)
33	16:29	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.1	(3)
34	17:02	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.1	(3)
35	17:08	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.3	(3)
36	19:19	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( N/A )	0.0	(3)
37	19:24	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	0.5	(3)
38	19:28	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	0.6	(3)
39	19:37	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	0.6	(3)
40	19:41	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( S )	1.1	(3)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, discharging oil, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 14 July 2014 (3) Conducted on 15 July 2014

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: -OI-1- / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 14 and 15 July 2014

Temperature: 26.1 - 31.6°C (14 July 2014) and 28.8 - 33.8°C (15 July 2014) (King's Park)

Humidity: 71 - 93% (14 July 2014) and 59 - 83% (15 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
41	18:32	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
42	18:14	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
43	18:09	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( S )	0.8	(3)
44	18:07	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	1.2	(3)
45	17:46	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	1.1	(3)
46	17:37	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
47	17:35	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	0.4	(3)
48	17:20	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( W )	0.2	(3)
49	16:46	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( E )	0.5	(3)
50	16:51	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.8	(3)
51	16:53	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.6	(3)
52	16:44	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( E )	0.5	(3)
53	17:22	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
54	17:26	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	0.4	(3)
55	17:45	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
56	17:49	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.6	(3)
57	17:55	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( S )	0.2	(3)
58	17:56	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( S )	0.5	(3)
59	18:19	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
60	18:30	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	0.0	(3)

\*Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage, or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 14 July 2014 (3) Conducted on 15 July 2014

	Name	Signature
Conducted by:	Lee Man Hei	
Checked by:	Henry Leung	

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: -OI-1- / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 14 and 15 July 2014

Temperature: 26.1 - 31.6°C (14 July 2014) and 28.8 - 33.8°C (15 July 2014)(King's Park)

Humidity: 71 - 93% (14 July 2014) and 59 - 83% (15 July 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
A1	16:34	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 (1) 2/3/4	fishy smell	exposed sediment	Intermittent / Continuous	Downwind / Upwind-( SW )	2.2	(2)
A2	16:27	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 (1) 2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind-( SW )	1.9	(2)
A3	16:23	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 (1) 2/3/4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind-( W )	1.8	(2)
A4	16:04	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 (1) 2/3/4	sewage	sewage treatment plant	Intermittent / Continuous	Downwind / Upwind ( S )	1.0	(2)
A5	16:15	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 (1) 2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	2.8	(2)

\*Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected, No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;


3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 14 July 2014 (3) Conducted on 15 July 2014

	Name	Signature
Conducted by:	Lee Man Hei	
Checked by:	Henry Leung	

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 22, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.0 - 31.0°C (22 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 61 - 92% (22 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
1	10:07	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	2.2	(2)
2	10:18	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	② 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	1.9	(2)
3	10:21	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	③ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.9	(2)
4	10:15	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	④ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	1.7	(2)
5	10:30	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑤ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	1.0	(2)
6	10:32	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑥ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	2.1	(2)
7	12:17	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑦ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	1.2	(2)
8	10:40	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑧ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.8	(2)
9	10:43	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑨ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.0	(2)
10	10:45	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑩ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.7	(2)
11	10:47	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑪ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.3	(2)
12	10:49	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑫ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	0.9	(2)
13	11:11	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑬ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.2	(2)
14	11:08	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑭ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.2	(2)
15	11:05	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑮ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.5	(2)
16	11:02	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑯ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	1.3	(2)
17	11:00	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑰ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	1.2	(2)
18	10:58	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑱ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.9	(2)
19	10:58	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑲ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	0.6	(2)
20	08:40	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑳ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	2.0	(3)

#Note: Odour intensity is to be divided into 5 levels which are mixed in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decaying vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Sources: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 12 August 2014 (3) Conducted on 22 August 2014 (4) Conducted on 27 August 2014

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: OI-1 / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 22, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.0 - 31.0°C (22 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 61 - 92% (22 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
21	12:08	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	1.0	(2)
22	11:59	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.4	(2)
23	11:57	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.7	(2)
24	11:54	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	0.7	(2)
25	11:52	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.6	(2)
26	11:48	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.4	(2)
27	11:37	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.7	(2)
28	11:33	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	2.3	(2)
29	11:10	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.1	(3)
30	11:15	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	2.1	(3)
31	09:00	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	4.4	(3)
32	08:53	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	fishy smell	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	3.5	(1) (3)
33	08:44	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	rubbish	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	0.9	(3)
34	08:18	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.1	(3)
35	09:21	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	2.1	(3)
36	08:21	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.8	(3)
37	07:58	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	oil, gas exhaust	floating oil	Intermittent / Continuous	Downwind / Upwind ( SE )	1.4	(3)
38	07:58	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.5	(3)
39	08:07	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	1.2	(3)
40	09:09	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	1.3	(3)

Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance;

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammoniacal, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Sources: Exposed sediment, water or sewage, floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objective background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 12 August 2014 (3) Conducted on 22 August 2014 (4) Conducted on 27 August 2014

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 22, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.0 - 31.0°C (22 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 61 - 92% (22 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
41	12:30	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.2	(4)
42	12:17	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ③ 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( E )	1.2	(4)
43	12:02	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	1.0	(4)
44	11:54	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.5	(4)
45	10:05	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	2.6	(3)
46	09:58	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.5	(3)
47	09:57	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ④ 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	2.5	(3)
48	09:45	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.8	(3)
49	09:33	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ④ 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	0.9	(3)
50	09:35	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ④ 2/3/4	rotten egg smell	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
51	09:38	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ④ 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( E )	1.3	(3)
52	09:31	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ④ 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	1.2	(3)
53	09:46	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.7	(3)
54	09:48	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.3	(3)
55	10:00	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	2.7	(3)
56	10:07	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	0.3	(3)
57	11:30	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.7	(4)
58	11:35	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.5	(4)
59	12:18	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ④ 2/3/4	sewage	Chemical Toilet nearby	Intermittent / Continuous	Downwind / Upwind ( E )	1.0	(4)
60	12:33	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.2	(4)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;


3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 12 August 2014 (3) Conducted on 22 August 2014 (4) Conducted on 27 August 2014

	Name	Signature
Conducted by:	Tang Wing Kwai	
Checked by:	Henry Loung	

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: OI-1 / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 22, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.0 - 31.0°C (22 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 61 - 92% (22 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
A1	08:47	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind-( SW )	2.8	(2)
A2	09:56	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind- ( SW )	0.3	(2)
A3	10:00	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind- ( SW )	0.8	(2)
A4	09:28	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 / ① 2/3/4	sewage	sewage treatment plant	Intermittent / Continuous	Downwind-/Upwind-( S )	1.5	(2)
A5	09:38	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( S )	3.9	(2)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate (detectable) odour, and moderate chance to have odour nuisance;



3 - Strong identifiable, likely to have odour nuisance;

4 - Extreme/severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage, floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 12 August 2014 (3) Conducted on 22 August 2014 (4) Conducted on 27 August 2014

	Name	Signature
Conducted by:	Tang Wing Kwai	
Checked by:	Honry Loung	

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind	Wind	Remarks
								Direction	Speed (m/s)	
1	16:52	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	1.4	(2)
2	17:15	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	3.7	(2)
3	17:09	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	3.5	(2)
4	17:04	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	3.2	(2)
5	17:24	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	5.8	(2)
6	17:26	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	2.7	(2)
7	19:16	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	2.4	(2)
8	17:38	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	3.2	(2)
9	17:41	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( S )	3.5	(2)
10	17:44	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.4	(2)
11	17:46	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( S )	5.5	(2)
12	17:47	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( S )	5.4	(2)
13	18:07	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( SE )	5.5	(2)
14	18:04	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( E )	5.0	(2)
15	18:01	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.0	(2)
16	17:59	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	3.4	(2)
17	17:57	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	3.8	(2)
18	17:55	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	4.1	(2)
19	17:52	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( E )	3.3	(2)
20	16:57	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	0 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	0.8	(3)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterized or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 25 August 2014 (3) Conducted on 26 August 2014

General InformationPatrol Locations: Within Kai Tak Development and Ma Tau Kok WaterfrontDate: 12, 25, 26 and 27 August 2014Temperature: 24.5 - 32.1°C (12 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)Humidity: 73 - 98% (12 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind	Wind	Remarks
								Direction	Speed (m/s)	
21	19:04	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.0	(2)
22	18:54	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	2.3	(2)
23	18:52	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	1.7	(2)
24	18:48	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	1.2	(2)
25	18:45	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	1.6	(2)
26	18:42	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	1.9	(2)
27	18:33	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	2.8	(2)
28	18:27	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	5.8	(2)
29	19:29	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.5	(3)
30	19:35	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.3	(3)
31	16:46	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	2.8	(3)
32	16:42	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	2.4	(3)
33	16:53	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	2.1	(3)
34	17:14	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	1.8	(3)
35	17:18	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	1.8	(3)
36	16:25	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	0.9	(3)
37	16:06	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	2.7	(3)
38	16:08	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	1.8	(3)
39	16:15	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	2.8	(3)
40	16:18	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	3.0	(3)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate Identifiable odour, and moderate chance to have odour nuisance;

3 - Strong Identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell; decayed vegetables; ammonical; dischargeable odour; putrefaction; sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 25 August 2014 (3) Conducted on 26 August 2014

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: OI-1 / -OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind	Wind	Remarks
								Direction	Speed (m/s)	
41	18:00	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind (N/A)	0.0	(3)
42	17:50	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( E )	1.2	(3)
43	18:40	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.4	(3)
44	18:37	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.5	(3)
45	19:07	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	1.3	(3)
46	19:00	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.2	(3)
47	18:59	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	0.4	(3)
48	18:48	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	1.5	(3)
49	17:31	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( SE )	1.2	(3)
50	17:33	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( S )	0.6	(3)
51	17:35	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	1.0	(3)
52	17:29	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	0.8	(3)
53	18:49	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	0.9	(3)
54	18:51	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( S )	0.7	(3)
55	19:03	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	0.5	(3)
56	19:10	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.7	(3)
57	18:20	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.7	(3)
58	18:24	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.6	(3)
59	17:51	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( E )	1.1	(3)
60	18:02	High-Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	0.5	(3)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;


3 - Strong identifiable, likely to have odour nuisance.

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 25 August 2014 (3) Conducted on 26 August 2014

	Name	Signature
Conducted by:	Tang Wing Kwai	
Checked by:	Henry Leung	

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: OI-1 / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind	Wind	Remarks
								Direction	Speed (m/s)	
A1	16:28	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	0.2	(2)
A2	16:39	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	0.5	(2)
A3	16:42	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	rubbish	floating rubbish	Intermittent / Continuous	Downwind / Upwind ( SE )	2.2	(2)
A4	16:05	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	sewage treatment plant	Intermittent / Continuous	Downwind / Upwind ( SW )	0.3	(2)
A5	16:17	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	1.8	(2)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 25 August 2014 (3) Conducted on 26 August 2014

	Name	Signature
Conducted by:	Tang Wing Kwai	
Checked by:	Henry Leung	

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: -OI-1- / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 22, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.0 - 31.0°C (22 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 61 - 92% (22 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
1	10:07	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind-( W )	2.2	(2)
2	10:18	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind-( W )	1.9	(2)
3	10:21	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind-( SW )	0.9	(2)
4	10:15	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind-( W )	1.7	(2)
5	10:30	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind ( W )	1.0	(2)
6	10:32	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind( S )	2.1	(2)
7	12:17	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind( S )	1.2	(2)
8	10:40	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind( SW )	0.8	(2)
9	10:43	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind( SW )	1.0	(2)
10	10:45	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind( SW )	0.7	(2)
11	10:47	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind( S )	0.3	(2)
12	10:49	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind( W )	0.9	(2)
13	11:11	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind( S )	0.2	(2)
14	11:08	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind( SE )	0.2	(2)
15	11:05	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind ( S )	0.5	(2)
16	11:02	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind ( S )	1.3	(2)
17	11:00	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind ( S )	1.2	(2)
18	10:58	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind ( SW )	0.9	(2)
19	10:56	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind ( E )	0.8	(2)
20	08:40	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind( E )	2.0	(3)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance;

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, Irritating, fruit, vinegar, etc

\*\*Potential Odour Sources: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 12 August 2014 (3) Conducted on 22 August 2014 (4) Conducted on 27 August 2014

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: -OI-1- / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 22, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.0 - 31.0°C (22 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 61 - 92% (22 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
21	12:08	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( S )	1.0	(2)
22	11:59	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( SW )	0.4	(2)
23	11:57	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( S )	0.7	(2)
24	11:54	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( SW )	0.7	(2)
25	11:52	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( S )	0.6	(2)
26	11:49	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( S )	0.4	(2)
27	11:37	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( S )	0.7	(2)
28	11:33	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( SE )	2.3	(2)
29	11:10	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( SE )	1.1	(3)
30	11:15	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( SE )	2.1	(3)
31	09:00	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( SE )	4.4	(3)
32	08:53	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	fishy smell and seawater smell	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	3.5	(1) (3)
33	08:44	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	rubbish	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	0.9	(3)
34	09:18	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( SE )	1.1	(3)
35	09:21	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( SE )	2.1	(3)
36	08:21	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( SE )	0.8	(3)
37	07:56	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	oil, gas exhaust	floating oil	Intermittent / Continuous	Downwind / Upwind ( SE )	1.4	(3)
38	07:58	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent-/Continuous	Downwind / Upwind ( SE )	0.5	(3)
39	08:07	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	1.2	(3)
40	08:09	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind ( SE )	1.3	(3)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected, No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance;

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage, floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 12 August 2014 (3) Conducted on 22 August 2014 (4) Conducted on 27 August 2014

Contract No. KL/2010/02  
 Kai Tak Development - Kai Tak Approach Channel and  
 Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: -OI-1- / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 22, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.0 - 31.0°C (22 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 61 - 92% (22 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
41	12:30	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.2	(4)
42	12:17	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ① 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( E )	1.2	(4)
43	12:02	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	② 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	1.0	(4)
44	11:54	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	③ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.5	(4)
45	10:05	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	④ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	2.6	(3)
46	09:58	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑤ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.5	(3)
47	09:57	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ⑥ 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( SE )	2.5	(3)
48	09:45	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑦ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.8	(3)
49	09:33	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ⑧ 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind( SE )	0.9	(3)
50	09:35	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ⑨ 2/3/4	rotten egg smell	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( N/A )	0.0	(3)
51	09:38	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ⑩ 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( E )	1.3	(3)
52	09:31	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ⑪ 2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	1.2	(3)
53	09:48	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑫ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.7	(3)
54	09:48	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑬ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.3	(3)
55	10:00	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑭ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	2.7	(3)
56	10:07	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑮ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( W )	0.3	(3)
57	11:30	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑯ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.7	(4)
58	11:35	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑰ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.5	(4)
59	12:16	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	0 ⑱ 2/3/4	sewage	Chemical Toilet nearby	Intermittent / Continuous	Downwind / Upwind ( E )	1.0	(4)
60	12:33	High Tide / Low-Tide	Sunny / Fine / Cloudy / Rainy	⑲ 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.2	(4)

#Note: Odour Intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;



3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 12 August 2014 (3) Conducted on 22 August 2014 (4) Conducted on 27 August 2014

Name	Signature
Conducted by: Lee Man Hei	
Checked by: Henry Leung	

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: -OI-1- / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 22, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.0 - 31.0°C (22 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 61 - 92% (22 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind Direction	Wind Speed (m/s)	Remarks
A1	09:47	High Tide / Low-Tide	Sunny / Fine <input checked="" type="checkbox"/> Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind-( SW )	2.8	(2)
A2	09:56	High Tide / Low-Tide	Sunny / Fine <input checked="" type="checkbox"/> Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind- ( SW )	0.3	(2)
A3	10:00	High Tide / Low-Tide	Sunny / Fine <input checked="" type="checkbox"/> Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind- ( SW )	0.8	(2)
A4	09:26	High Tide / Low-Tide	Sunny / Fine <input checked="" type="checkbox"/> Cloudy / Rainy	0 / ① 2/3/4	sewage	sewage treatment plant	Intermittent / Continuous	Downwind / Upwind-( S )	1.5	(2)
A5	09:38	High Tide / Low-Tide	Sunny / Fine <input checked="" type="checkbox"/> Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent/-Continuous	Downwind / Upwind ( S )	3.0	(2)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance;

4 - Extreme/severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 12 August 2014 (3) Conducted on 22 August 2014 (4) Conducted on 27 August 2014

	Name	Signature
Conducted by:	Lee Man Hoi	
Checked by:	Henry Leung	

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind	Wind	Remarks
								Direction	Speed (m/s)	
1	16:52	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SW )	1.4	(2)
2	17:15	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	3.7	(2)
3	17:09	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	3.5	(2)
4	17:04	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	3.2	(2)
5	17:24	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	5.8	(2)
6	17:26	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	2.7	(2)
7	19:16	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	2.4	(2)
8	17:38	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	3.2	(2)
9	17:41	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( S )	3.5	(2)
10	17:44	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.4	(2)
11	17:46	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( S )	5.5	(2)
12	17:47	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( S )	5.4	(2)
13	18:07	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( SE )	5.5	(2)
14	18:04	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( E )	5.0	(2)
15	18:01	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.0	(2)
16	17:59	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	3.4	(2)
17	17:57	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	3.8	(2)
18	17:55	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	4.1	(2)
19	17:52	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( E )	3.3	(2)
20	16:57	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	0.8	(3)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell; decayed vegetables, ammonical, dischargeable odour; putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 25 August 2014 (3) Conducted on 26 August 2014

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind	Wind	Remarks
								Direction	Speed (m/s)	
21	19:04	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SW )	1.0	(2)
22	18:54	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( E )	2.3	(2)
23	18:52	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( E )	1.7	(2)
24	18:48	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( E )	1.2	(2)
25	18:45	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( E )	1.6	(2)
26	18:42	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( E )	1.9	(2)
27	18:33	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	2.8	(2)
28	18:27	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	5.8	(2)
29	19:29	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	0.5	(3)
30	19:35	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( SE )	0.3	(3)
31	16:46	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	2.8	(3)
32	16:42	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	2.4	(3)
33	16:53	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	2.1	(3)
34	17:14	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.8	(3)
35	17:18	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.8	(3)
36	16:25	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( SE )	0.9	(3)
37	16:06	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( SE )	2.7	(3)
38	16:08	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( SE )	1.8	(3)
39	16:15	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( SE )	2.8	(3)
40	16:18	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	marine water	Intermittent / Continuous	Downwind / Upwind( SE )	3.0	(3)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, Imitating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 25 August 2014 (3) Conducted on 26 August 2014

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: -OI-1- / OI-2

General Information

Patrol Locations: Within Kai Tak Development and Ma Tau Kok Waterfront

Date: 12, 25, 26 and 27 August 2014

Temperature: 24.5 - 32.1°C (12 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

Humidity: 73 - 98% (12 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind	Wind Speed (m/s)	Remarks
								Direction		
41	18:00	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind (N/A)	0.0	(3)
42	17:50	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( E )	1.2	(3)
43	18:40	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.4	(3)
44	18:37	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.5	(3)
45	19:07	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	1.3	(3)
46	19:00	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.2	(3)
47	18:59	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.4	(3)
48	18:48	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	1.5	(3)
49	17:31	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	1.2	(3)
50	17:33	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( S )	0.6	(3)
51	17:35	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	1.0	(3)
52	17:29	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	0.8	(3)
53	18:49	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( SE )	0.9	(3)
54	18:51	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( S )	0.7	(3)
55	19:03	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.5	(3)
56	19:10	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( SE )	0.7	(3)
57	18:20	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.7	(3)
58	18:24	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( S )	0.6	(3)
59	17:51	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	water at Kai Tak Nullah	Intermittent / Continuous	Downwind / Upwind ( E )	1.1	(3)
60	18:02	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	0.5	(3)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;



3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objective background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 25 August 2014 (3) Conducted on 25 August 2014

	Name	Signature
Conducted by:	Lee Man Hei	
Checked by:	Henry Leung	

Contract No. KL/2010/02

Kai Tak Development - Kai Tak Approach Channel and  
Kwun Tong Typhoon Shelter Improvement Works

Odour Patrol Record Sheet

Odour Intensity Detected by Panel Members: -OI-1- / OI-2

General Information

**Patrol Locations:** Within Kai Tak Development and Ma Tau Kok Waterfront

**Date:** 12, 25, 26 and 27 August 2014

**Temperature:** 24.5 - 32.1°C (12 August 2014), 26.8 - 33.0°C (25 August 2014), 27.2 - 32.6°C (26 August 2014) and 27.5 - 31.4°C (27 August 2014) (King's Park)

**Humidity:** 73 - 98% (12 August 2014), 58 - 89% (25 August 2014), 60 - 87% (26 August 2014) and 67 - 68% (27 August 2014) (General)

Location	Time of Survey	Tidal Condition	Weather Condition	#Odour Intensity	*Odour Characteristics	**Potential Odour Sources	Duration of Odour	Wind	Wind	Remarks
								Direction	Speed (m/s)	
A1	16:28	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind ( E )	0.2	(2)
A2	16:39	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( W )	0.5	(2)
A3	16:42	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	rubbish	floating rubbish	Intermittent / Continuous	Downwind / Upwind( SE )	2.2	(2)
A4	16:05	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	sewage	sewage treatment plant	Intermittent / Continuous	Downwind / Upwind( SW )	0.3	(2)
A5	16:17	High Tide / Low Tide	Sunny / Fine / Cloudy / Rainy	① 1/2/3/4	N/A	N/A	Intermittent / Continuous	Downwind / Upwind( S )	1.8	(2)

#Note: Odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:

0 - Not detected. No odour perceived or an odour so weak that it can not be easily characterised or described;

1 - Slight identifiable odour, and slight chance to have odour nuisance;

2 - Moderate identifiable odour, and moderate chance to have odour nuisance;

3 - Strong identifiable, likely to have odour nuisance

4 - Extreme severe odour, and unacceptable odour level.

\*Description of Odour Characteristics: Sewage or rotten-egg smell, decayed vegetables, ammonical, dischargeable odour, putrefaction, sharp, pungent, fish, irritating, fruit, vinegar, etc

\*\*Potential Odour Source: Exposed sediment, water or sewage; floating debris or material etc

Remarks: (1) The seawater smell is considered as non-objectionable background smell as quoted in Kai Tak Schedule 3 EIA Report (2) Conducted on 25 August 2014 (3) Conducted on 26 August 2014

	Name	Signature
Conducted by:	Lee Man Hei	
Checked by:	Henry Leung	

---


---

**APPENDIX F**  
**METEOROLOGICAL DATA FROM**  
**HONG KONG OBSERVATORY**  
**STATION DURING ODOUR**  
**SAMPLING AND ODOUR PATROL**


---

---


### Temperature from Kwun Tong

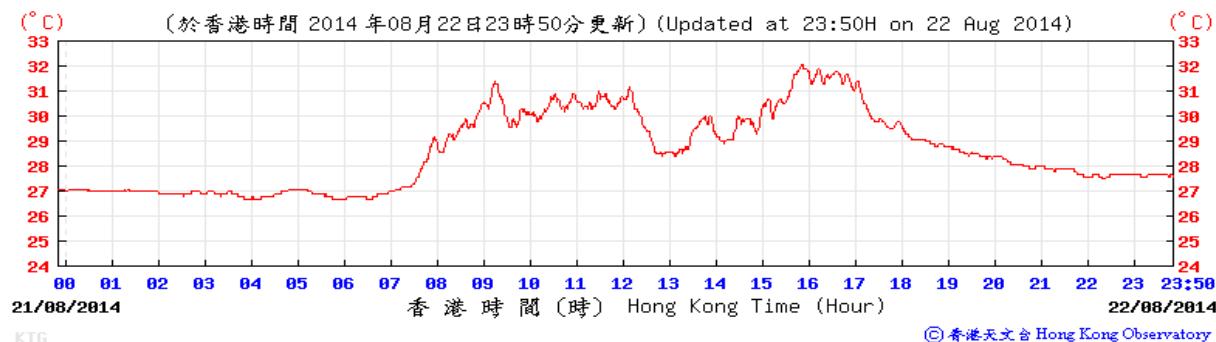

### Wind Speed from Kai Tak

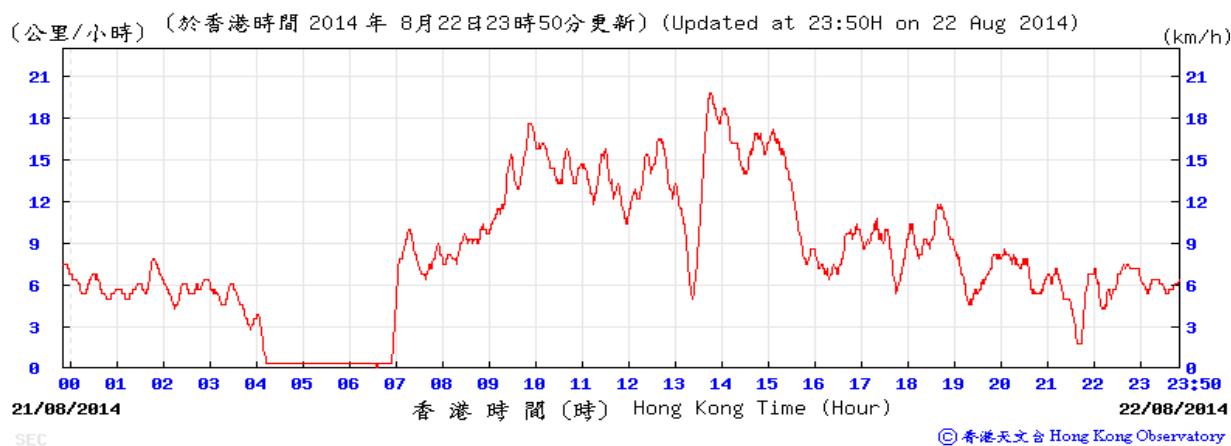


### Wind Direction from Kai Tak

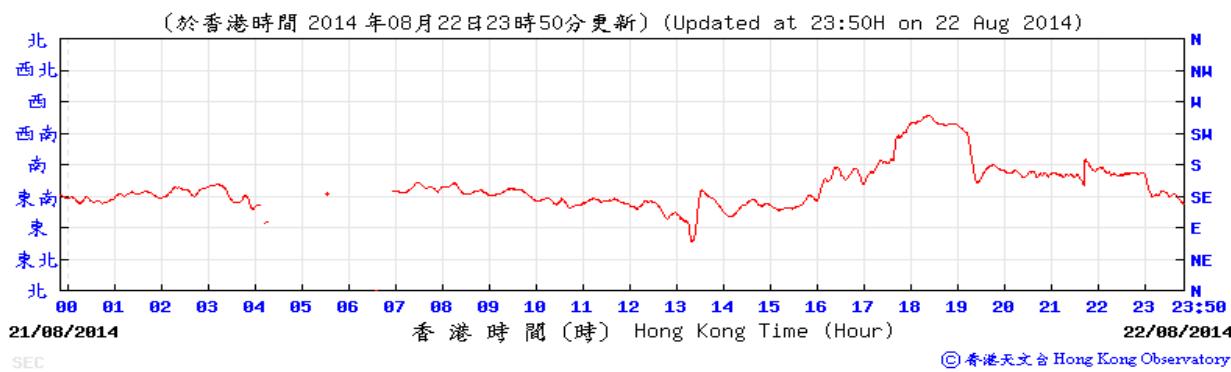


Title Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works (Phase 1)	Contract No. KL/2010/02	Scale N.T.S	Project No. MA11017	<b>CINOTECH</b>
Meteorological data from Hong Kong Observatory Station during Odour Sampling	Date Aug 14	Appendix F		

## Meteorological Conditions (King's Park)


### Temperature & Humidity

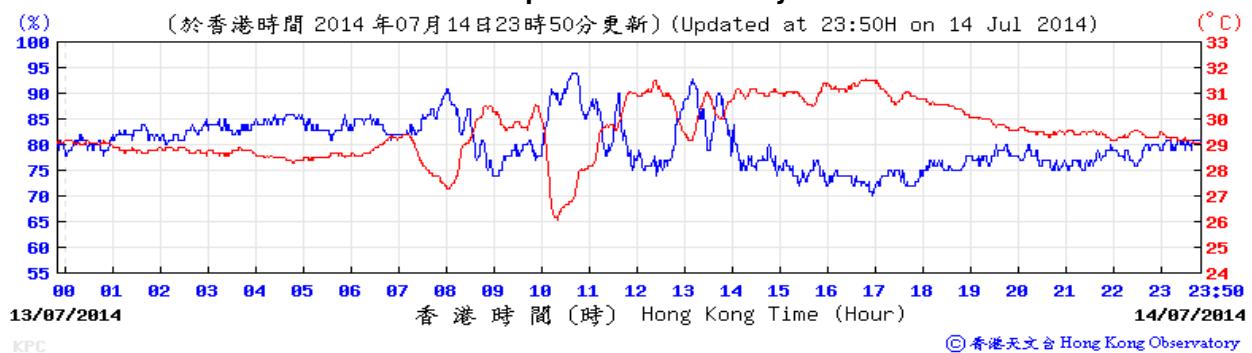

### Wind Direction

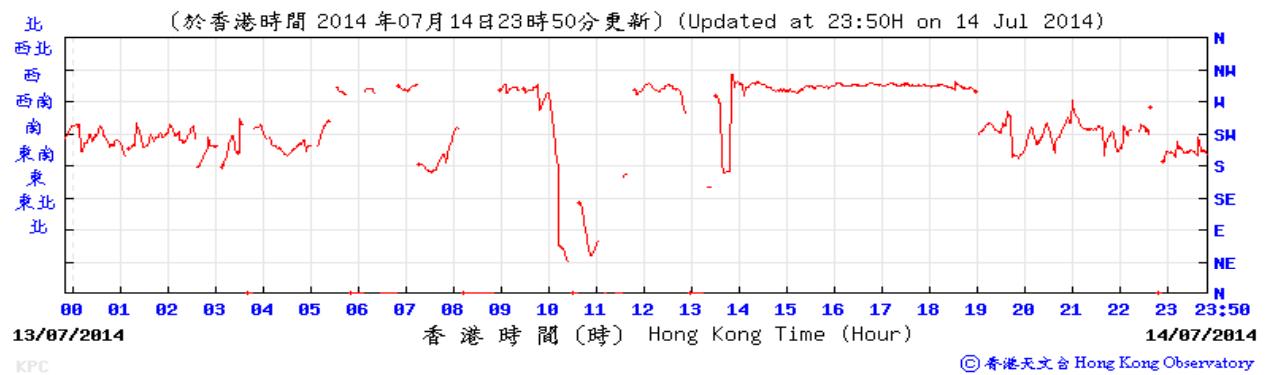

### Wind Speed

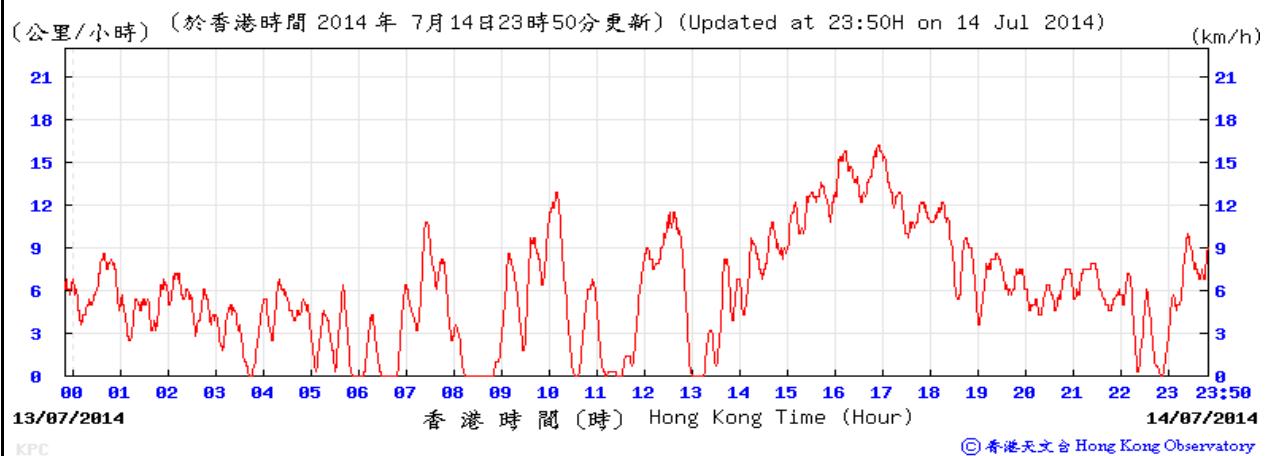

Title	Contract No. KL/2010/02	Scale	Project No.	<b>CINOTECH</b>
	Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works	N.T.S	MA11017	
Date	July 14	Appendix	F	


Meteorological data from Hong Kong Observatory Station during Odour Patrol

## Meteorological Conditions (King's Park)


### Temperature & Humidity



### Wind Direction

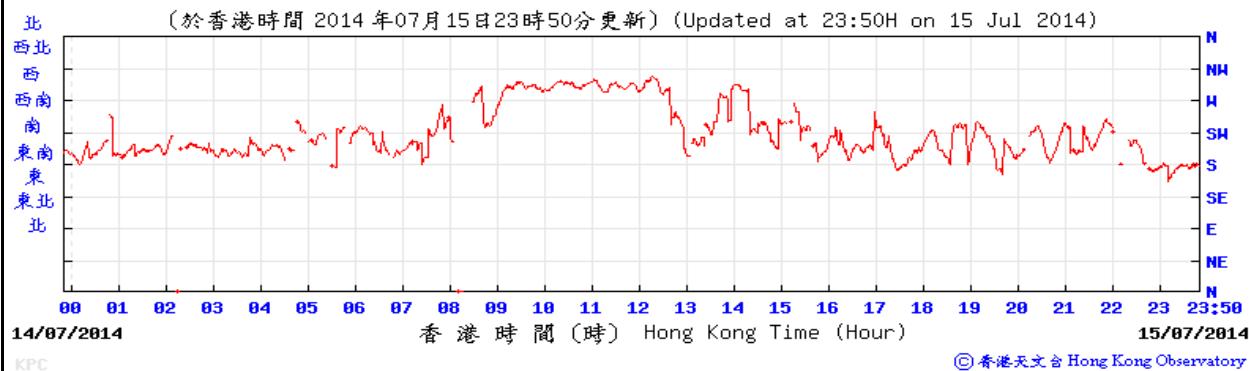


### Wind Speed

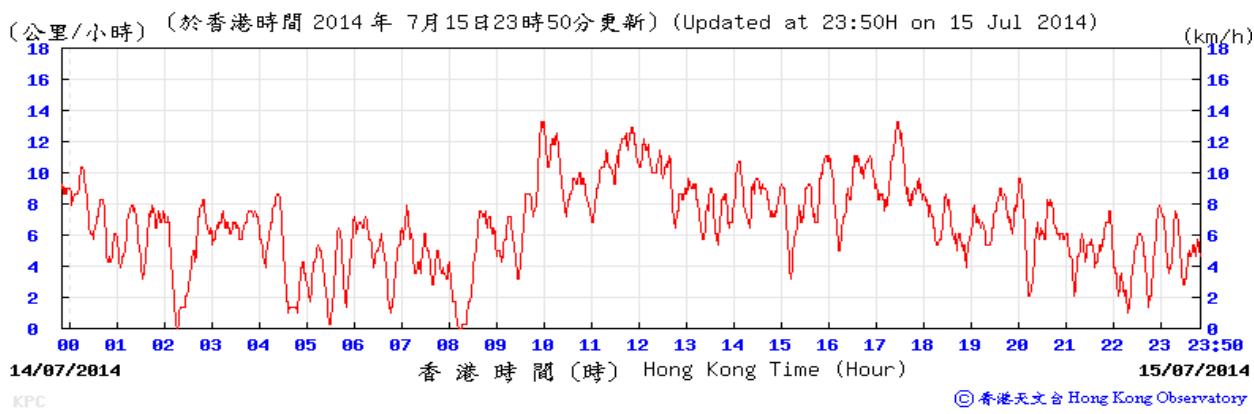


Title	Contract No. KL/2010/02	Scale	Project No.	<b>CINOTECH</b>
	Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works	N.T.S	MA11017	
	Meteorological data from Hong Kong Observatory Station during Odour Patrol	Date	Appendix	F
		July 14		

## Meteorological Conditions (King's Park)


### Temperature & Humidity

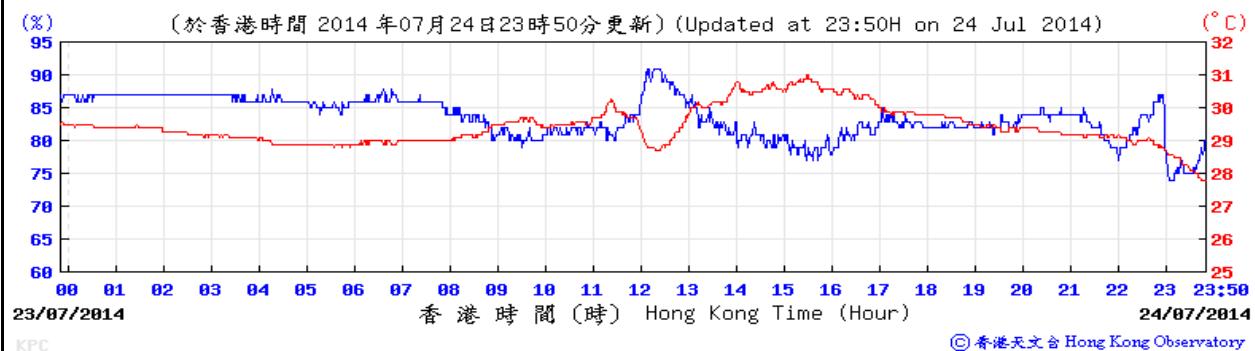

### Wind Direction

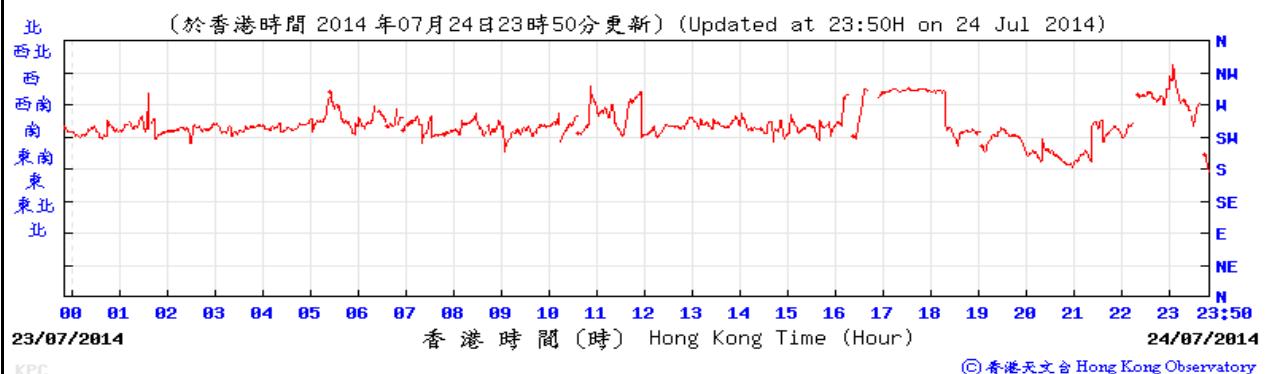

### Wind Speed

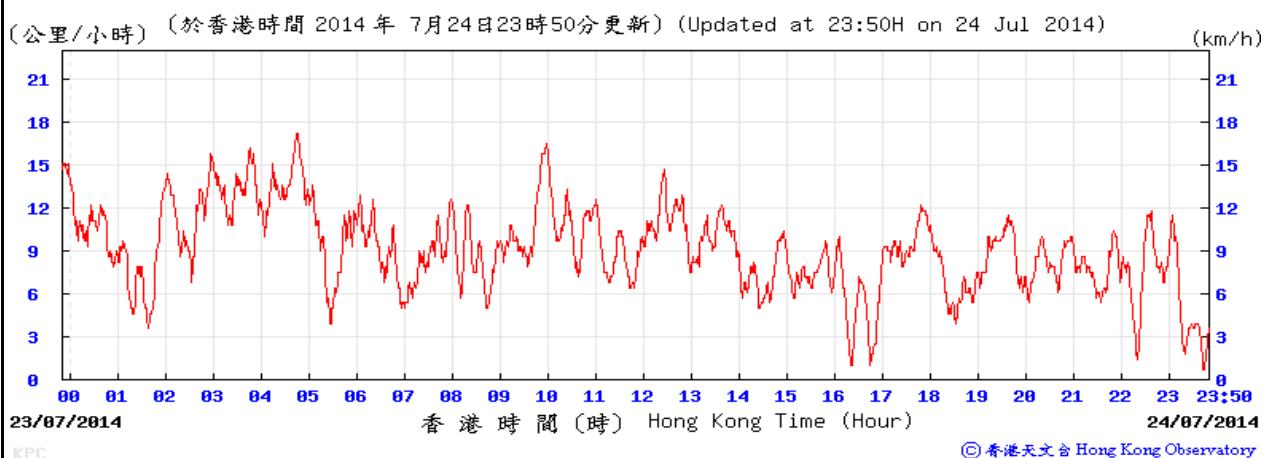


Title	Contract No. KL/2010/02 Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works Meteorological data from Hong Kong Observatory Station during Odour Patrol	Scale	Project No.	<b>CINOTECH</b>
		N.T.S	MA11017	
Date	July 14	Appendix	F	

## Meteorological Conditions (Kai Tak)

### Wind Direction




### Wind Speed

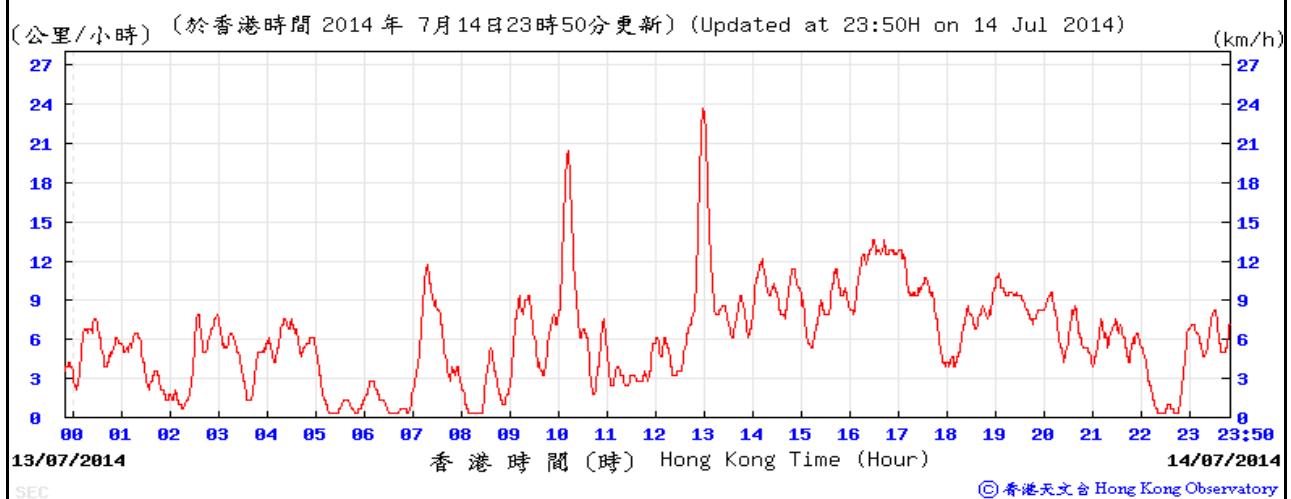


Title	Contract No. KL/2010/02	Scale	Project No.	<b>CINOTECH</b>
	Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works	N.T.S	MA11017	
	Meteorological data from Hong Kong Observatory Station during Odour Patrol	Date	Appendix	F

## Meteorological Conditions (Kai Tak)

### Wind Direction

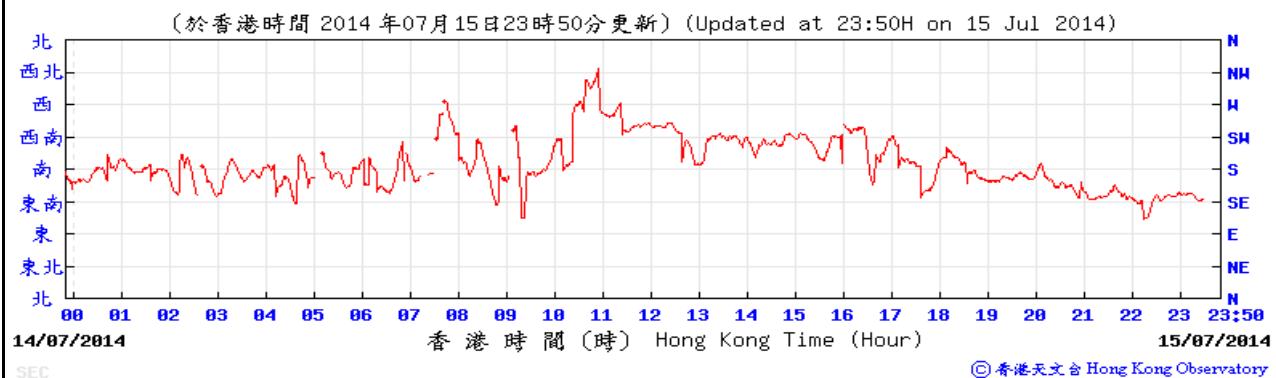


### Wind Speed

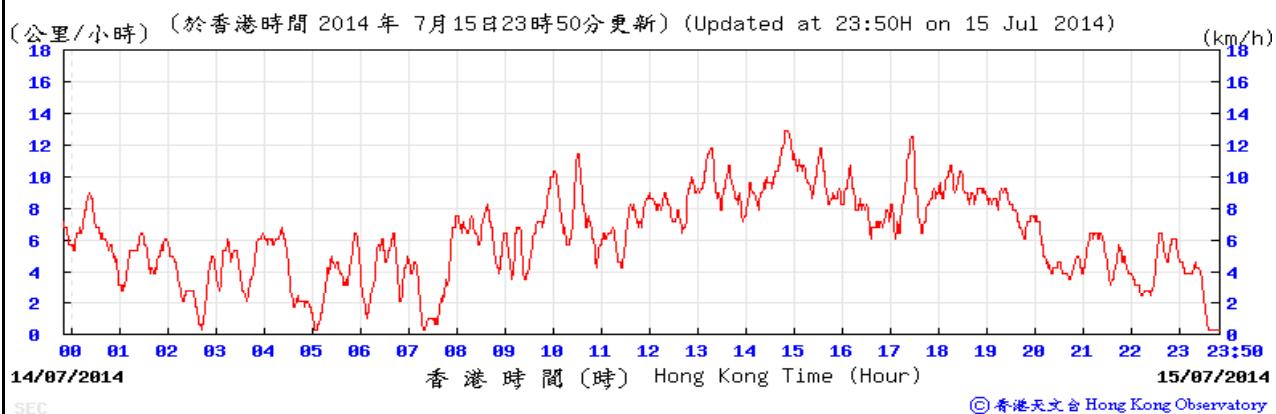


Title Contract No. KL/2010/02 Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works Meteorological data from Hong Kong Observatory Station during Odour Patrol	Scale N.T.S	Project No. MA11017	CINOTECH
Date July 14	Appendix F		

## Meteorological Conditions (Kai Tak)

### Wind Direction



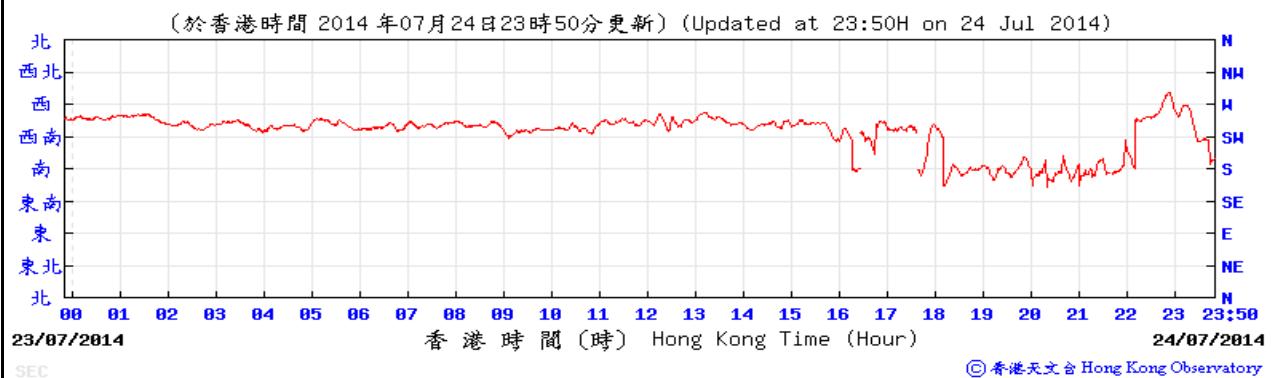


### Wind Speed

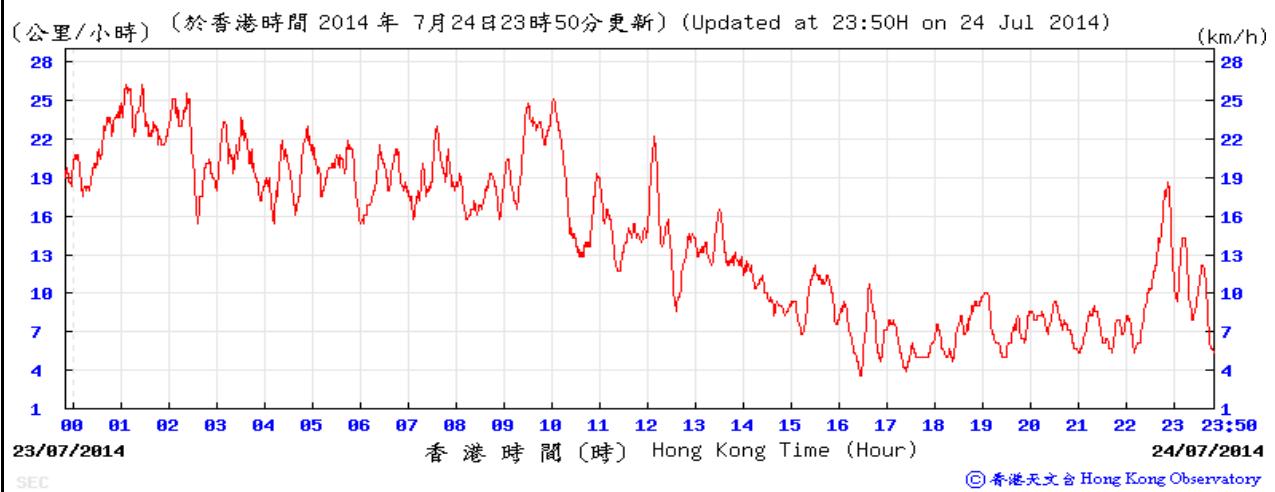

Title Contract No. KL/2010/02 Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works Meteorological data from Hong Kong Observatory Station during Odour Patrol	Scale N.T.S	Project No. MA11017	<b>CINOTECH</b>
	Date July 14	Appendix F	


## Predicted Tides at Quarry Bay in July 2014

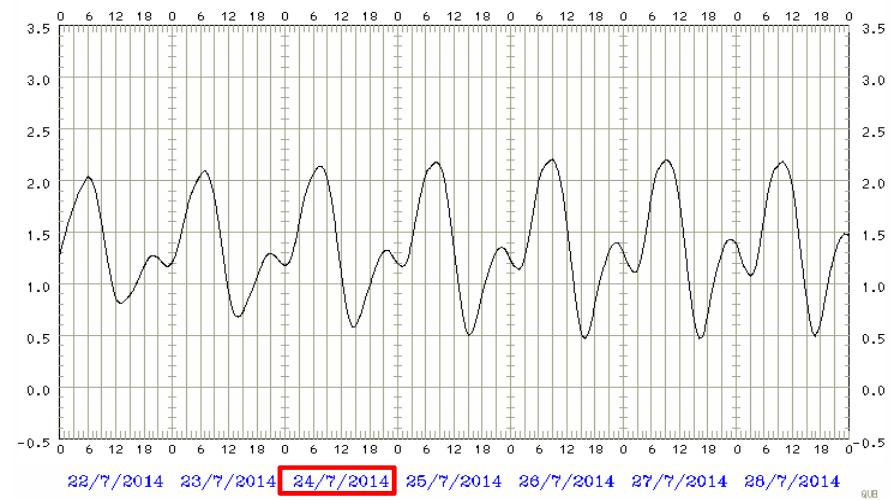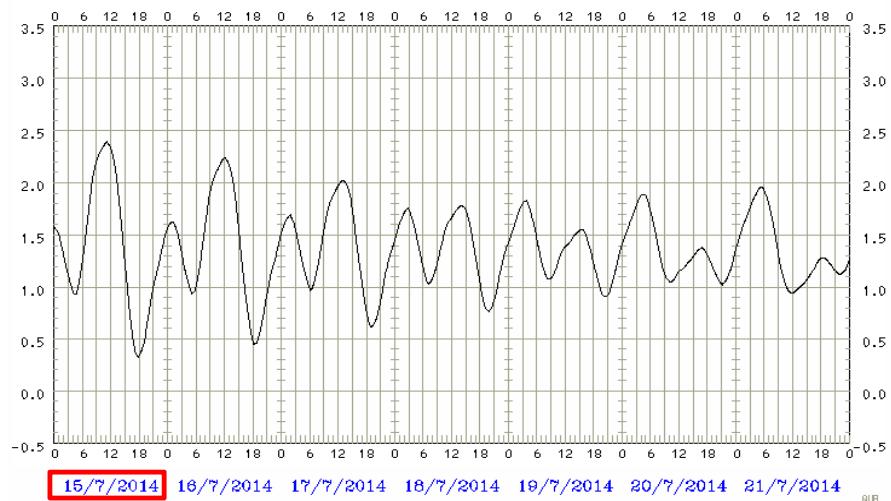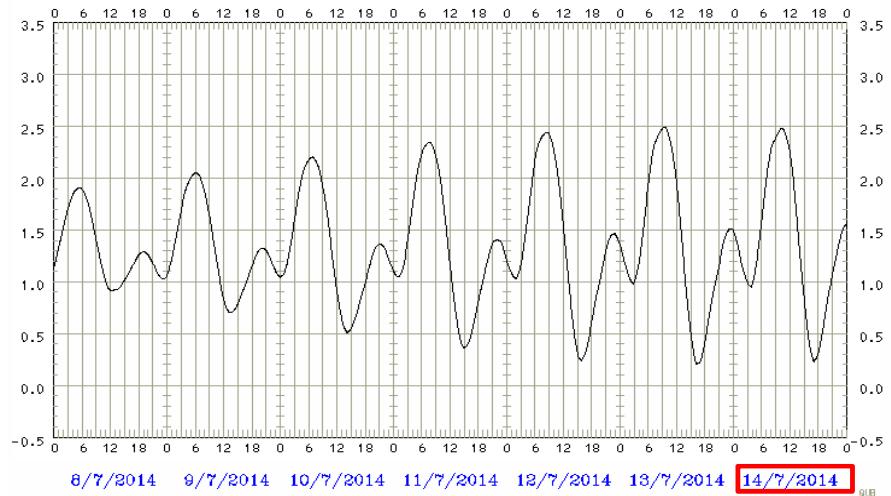


Title	Contract No. KL/2010/02 Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works Meteorological data from Hong Kong Observatory Station during Odour Patrol	Scale	Project No. MA11017	<b>CINOTECH</b>
		N.T.S		
Date	July 14	Appendix	F	

## Meteorological Conditions (King's Park)


### Temperature & Humidity

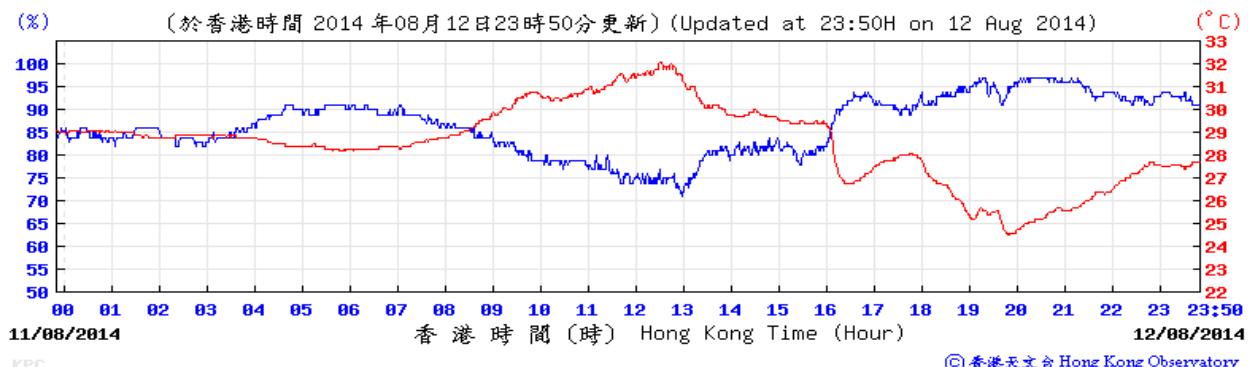

### Wind Direction

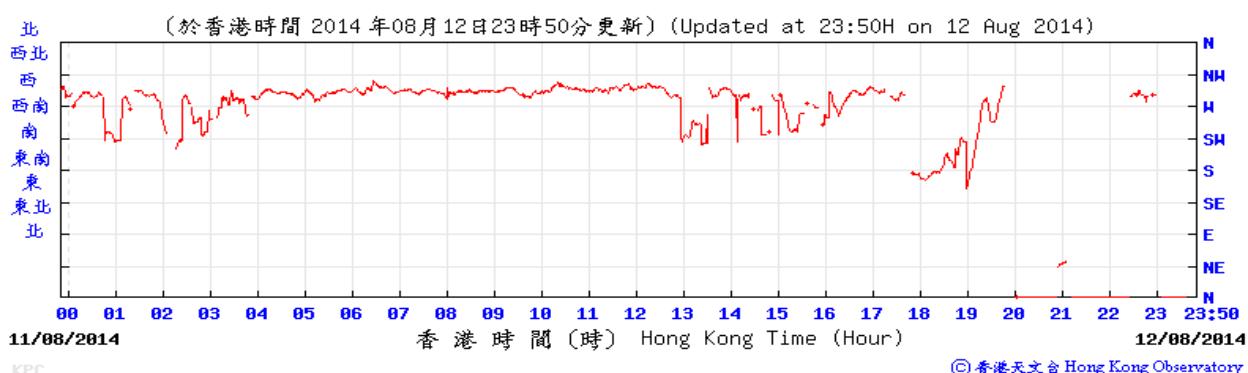


### Wind Speed

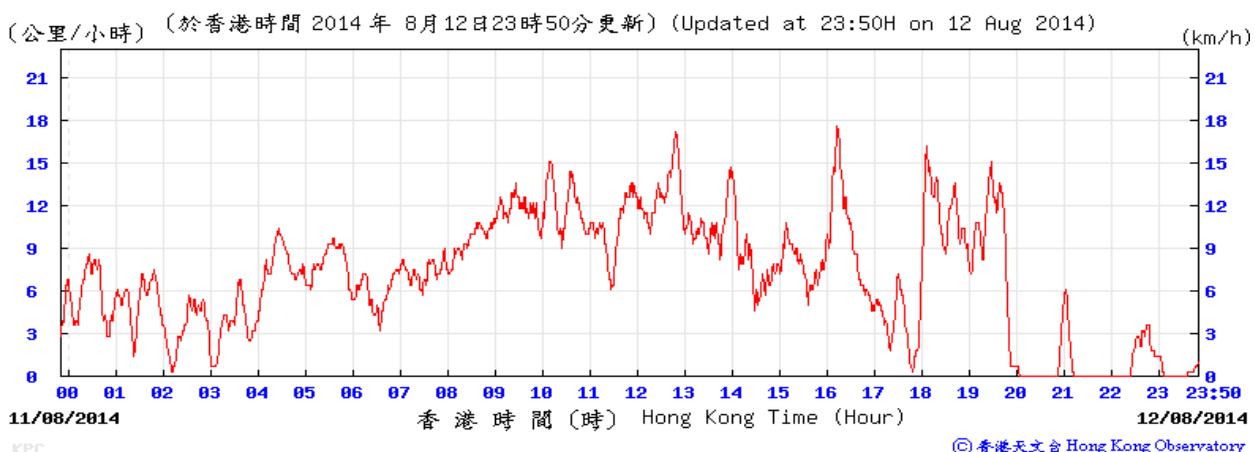


Title	Contract No. KL/2010/02	Scale	Project No.	<b>CINOTECH</b>
	Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works	N.T.S	MA11017	
	Meteorological data from Hong Kong Observatory Station during Odour Patrol	Date	Appendix	F
		Aug 14		

## Meteorological Conditions (King's Park)


### Temperature & Humidity

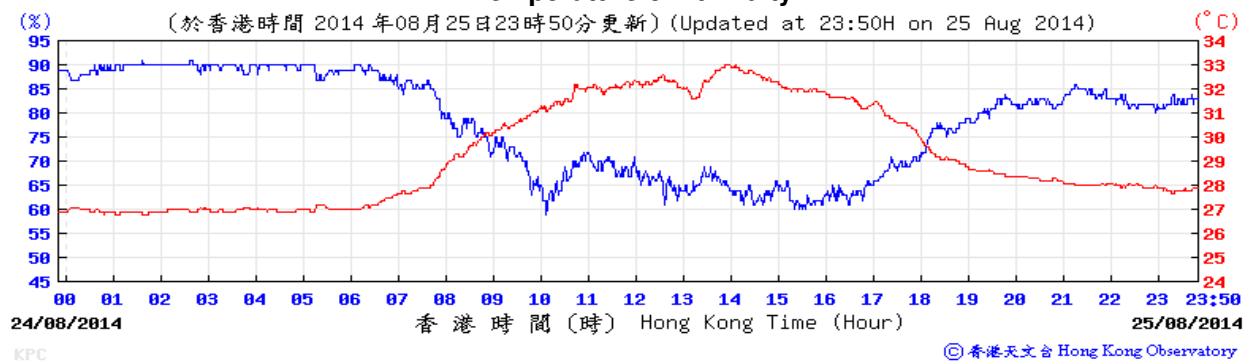

### Wind Direction

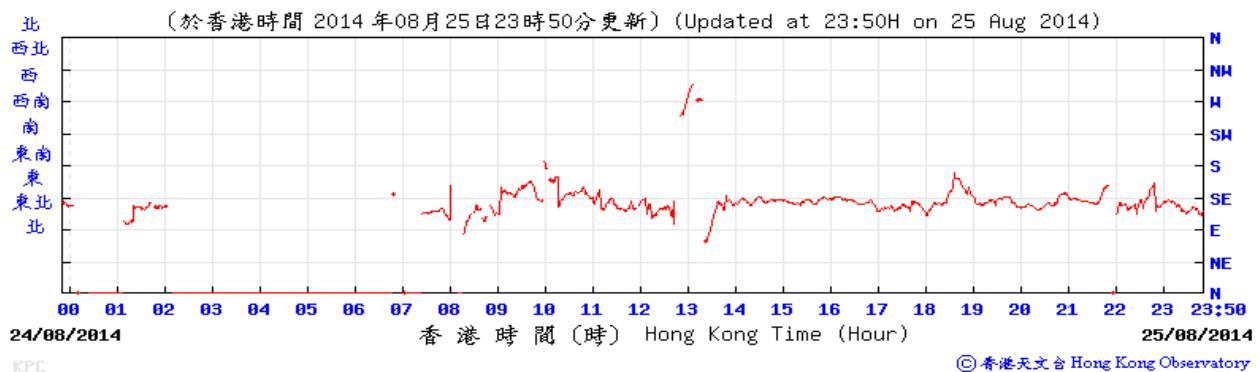


### Wind Speed

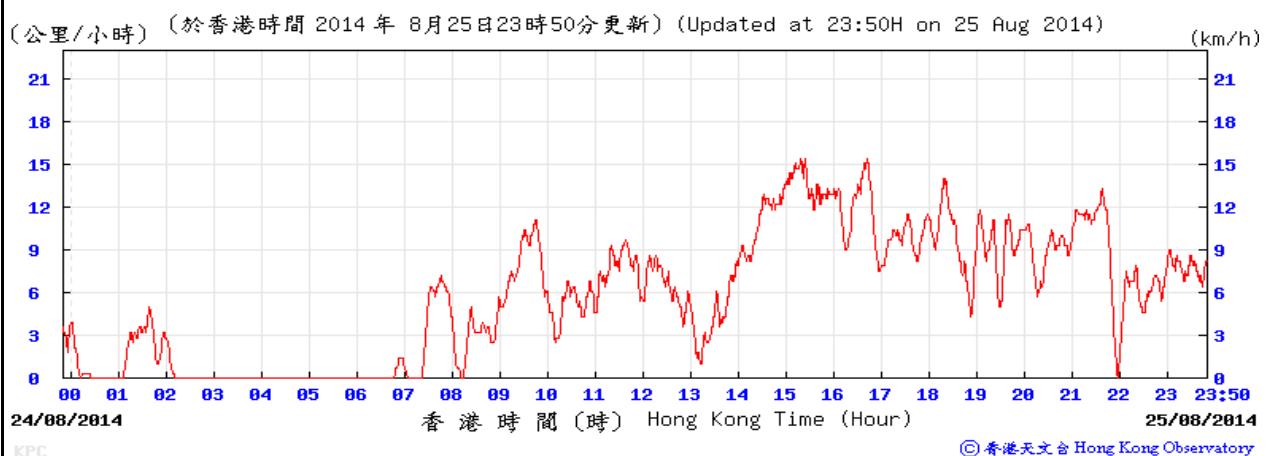


Title	Contract No. KL/2010/02 Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works Meteorological data from Hong Kong Observatory Station during Odour Patrol	Scale	Project No.	
Date	N.T.S	MA11017	Appendix F	

## Meteorological Conditions (King's Park)


### Temperature & Humidity

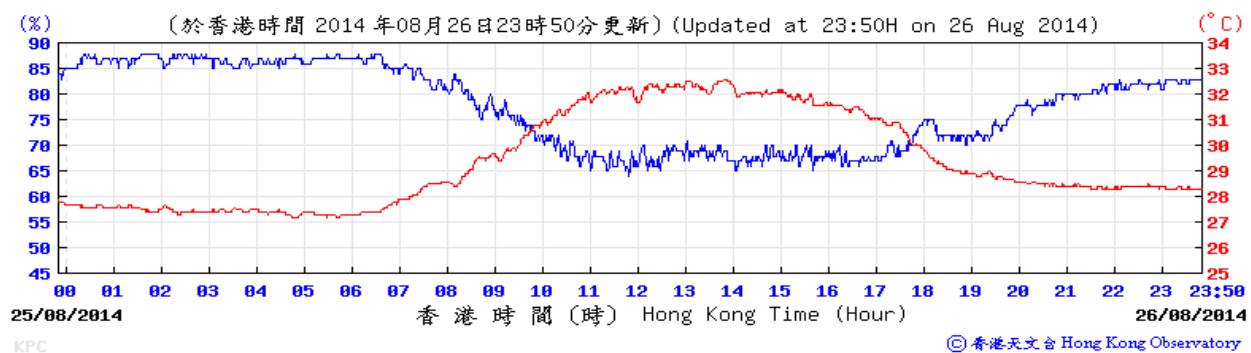

### Wind Direction

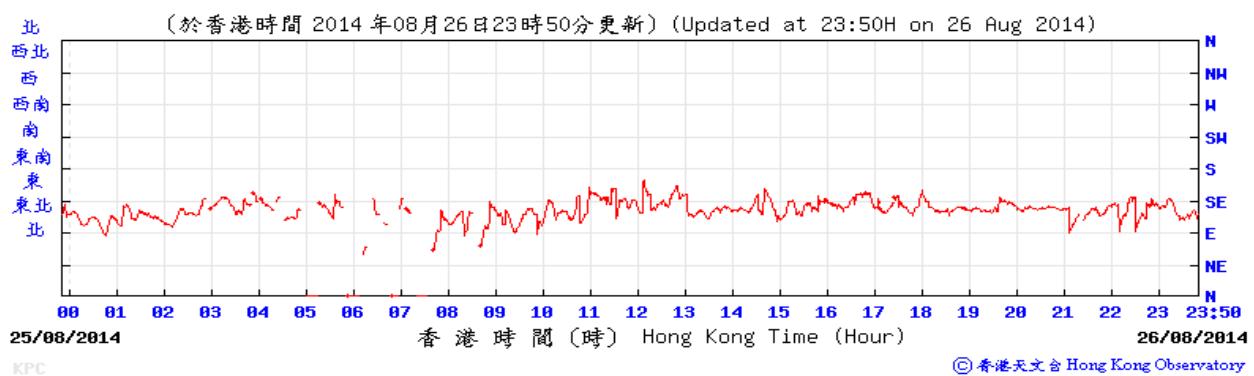

### Wind Speed

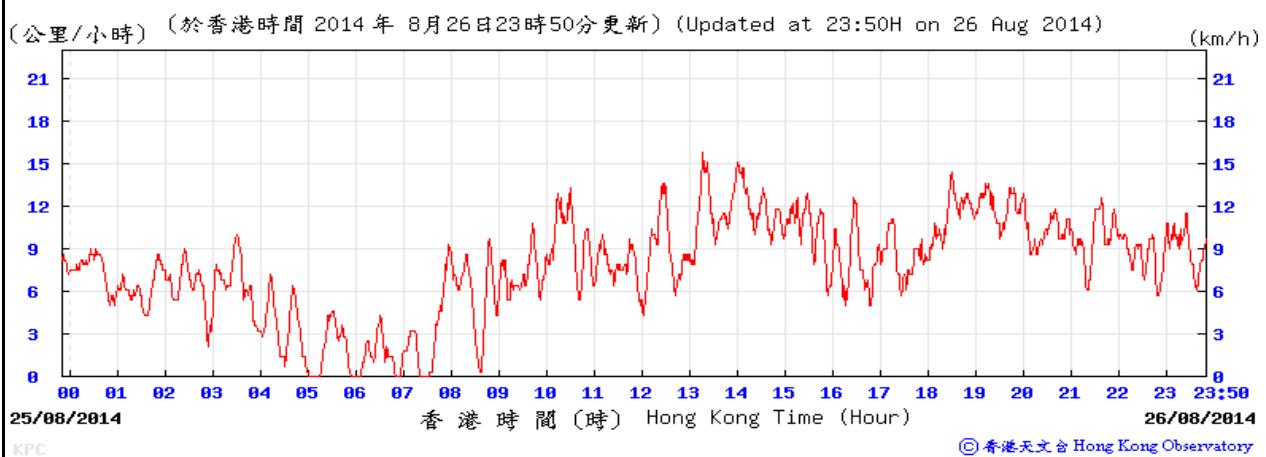


Title	Contract No. KL/2010/02 Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works Meteorological data from Hong Kong Observatory Station during Odour Patrol	Scale	Project No.	<b>CINOTECH</b>
		N.T.S	MA11017	
Date	Aug 14	Appendix	F	

## Meteorological Conditions (King's Park)


### Temperature & Humidity



### Wind Direction

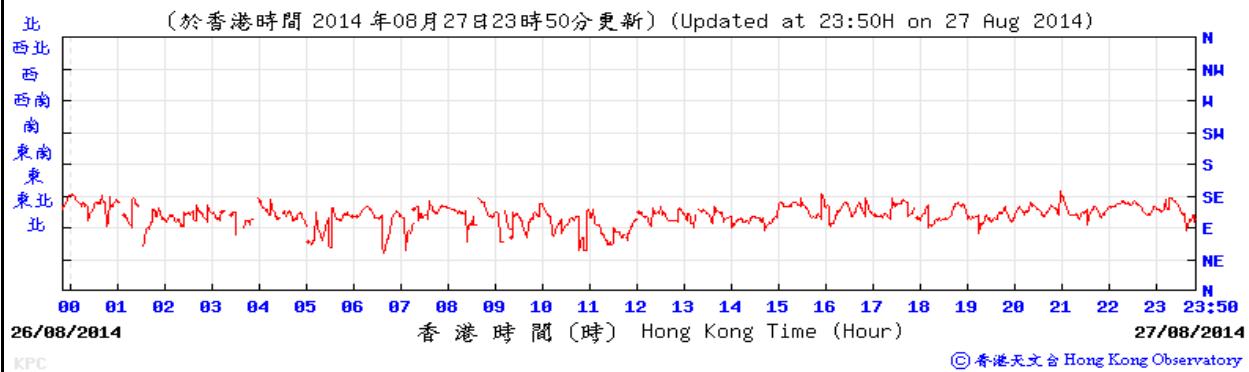


### Wind Speed

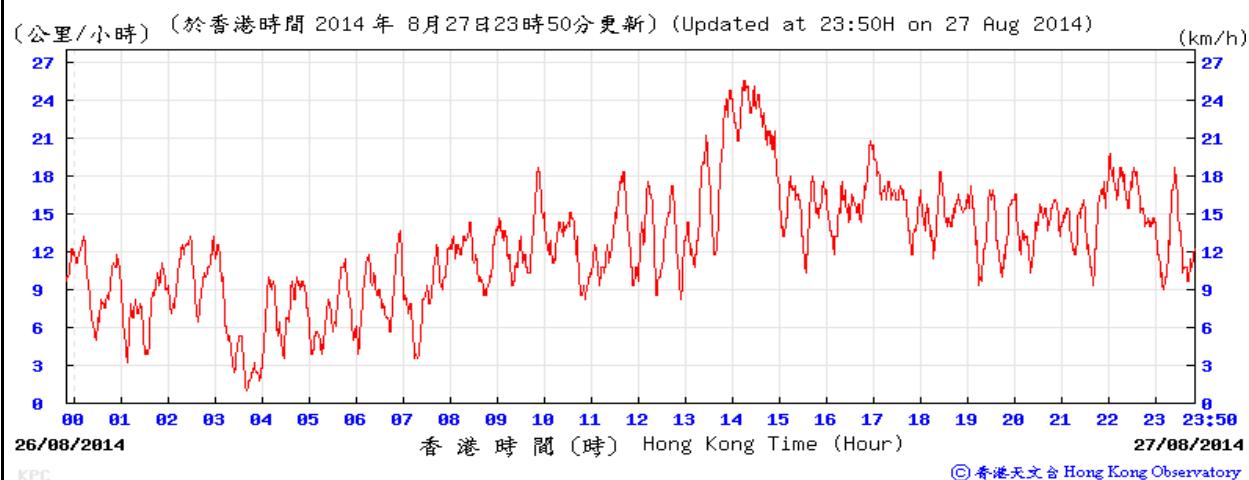


Title	Contract No. KL/2010/02 Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works Meteorological data from Hong Kong Observatory Station during Odour Patrol	Scale	Project No.	<b>CINOTECH</b>
		N.T.S	MA11017	
Date	Aug 14	Appendix	F	

## Meteorological Conditions (Kai Tak)

### Wind Direction

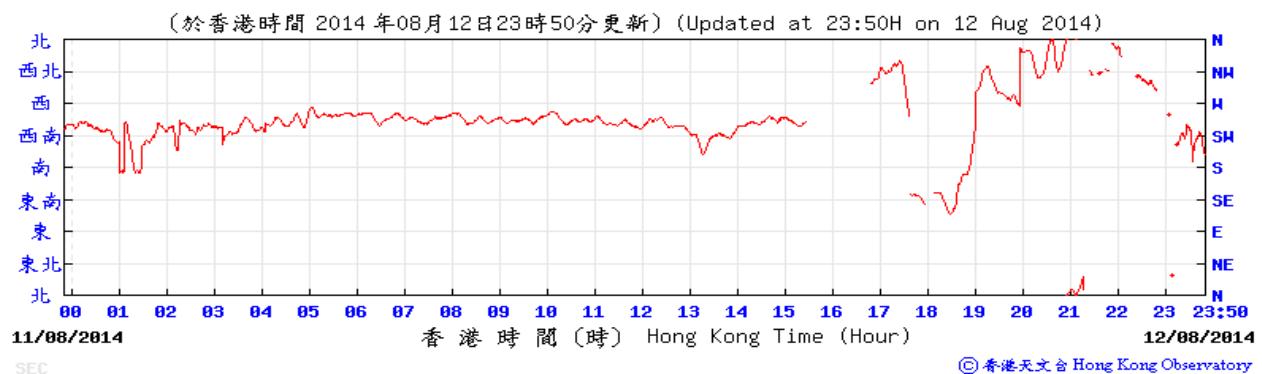


### Wind Speed

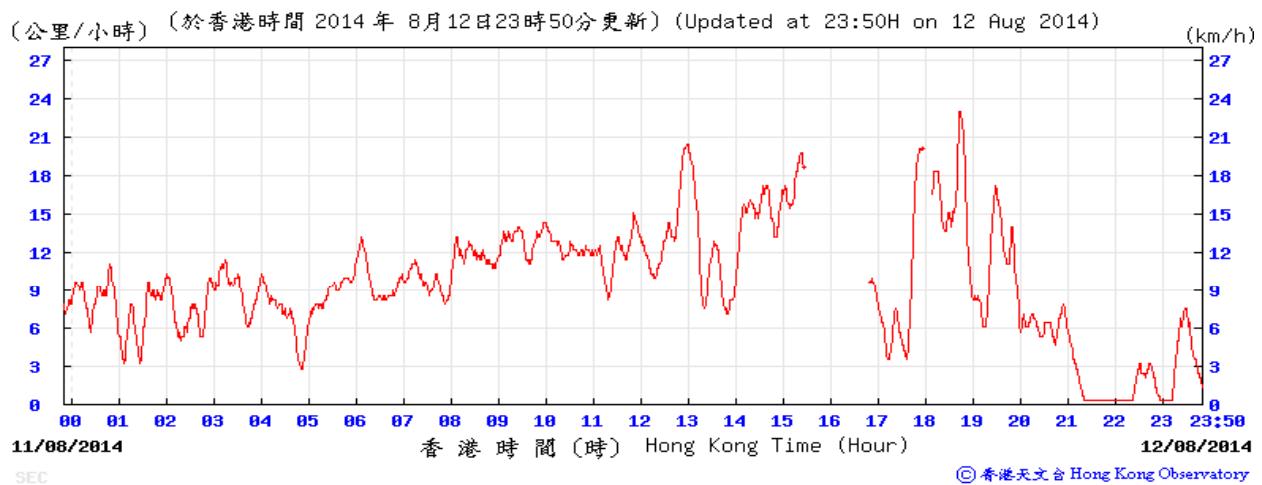


Title	Contract No. KL/2010/02	Scale	Project No.	<b>CINOTECH</b>
	Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works	N.T.S	MA11017	
	Meteorological data from Hong Kong Observatory Station during Odour Patrol	Date	Appendix	
		Aug 14	F	

## Meteorological Conditions (Kai Tak)

### Wind Direction

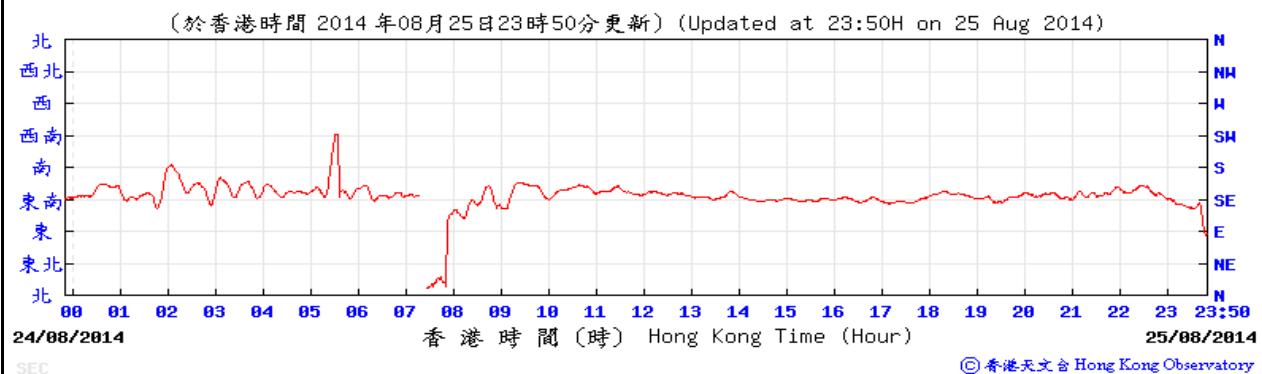


### Wind Speed

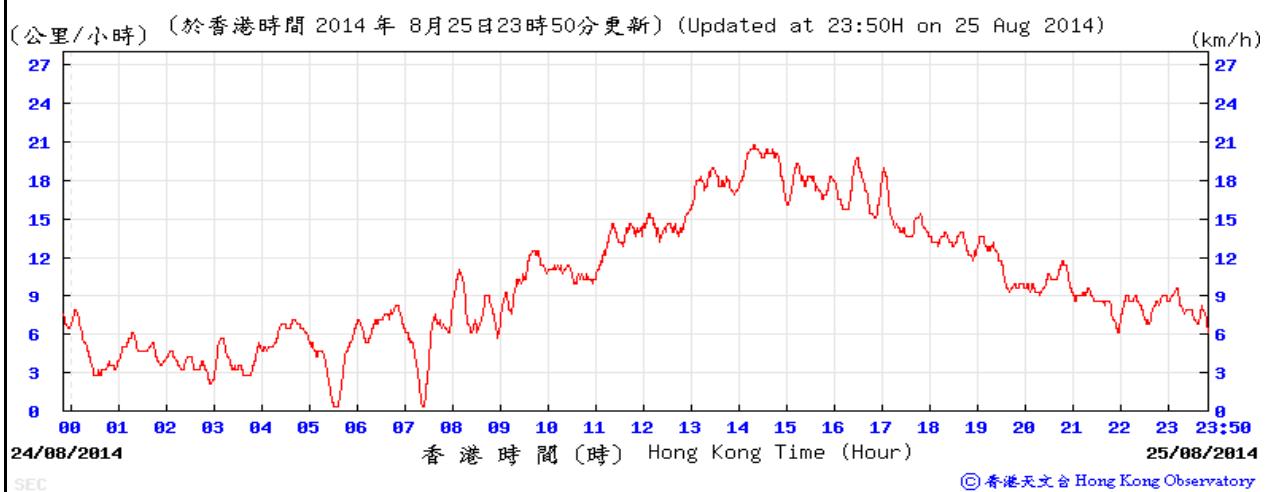


Title	Contract No. KL/2010/02 Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works Meteorological data from Hong Kong Observatory Station during Odour Patrol	Scale	Project No.	
		N.T.S	MA11017	<b>CINOTECH</b>
Date	Aug 14	Appendix	F	

## Meteorological Conditions (Kai Tak)

### Wind Direction

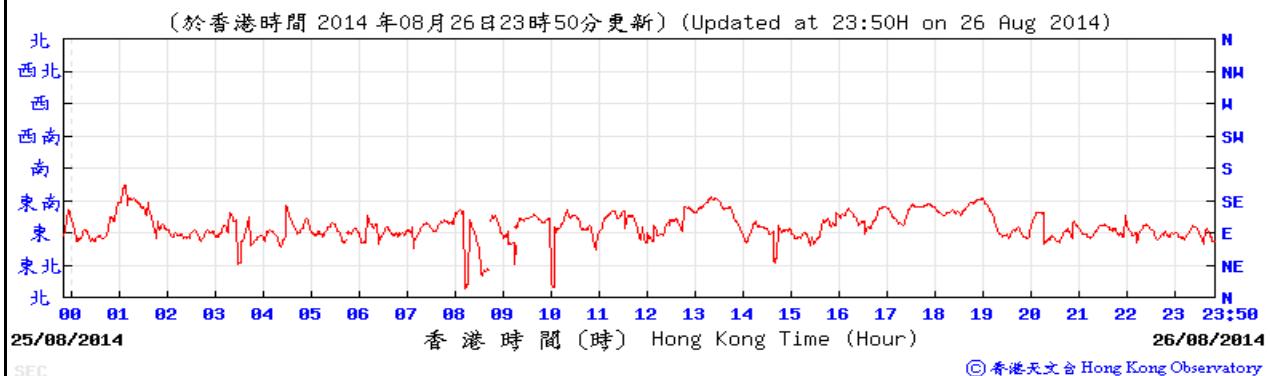


### Wind Speed

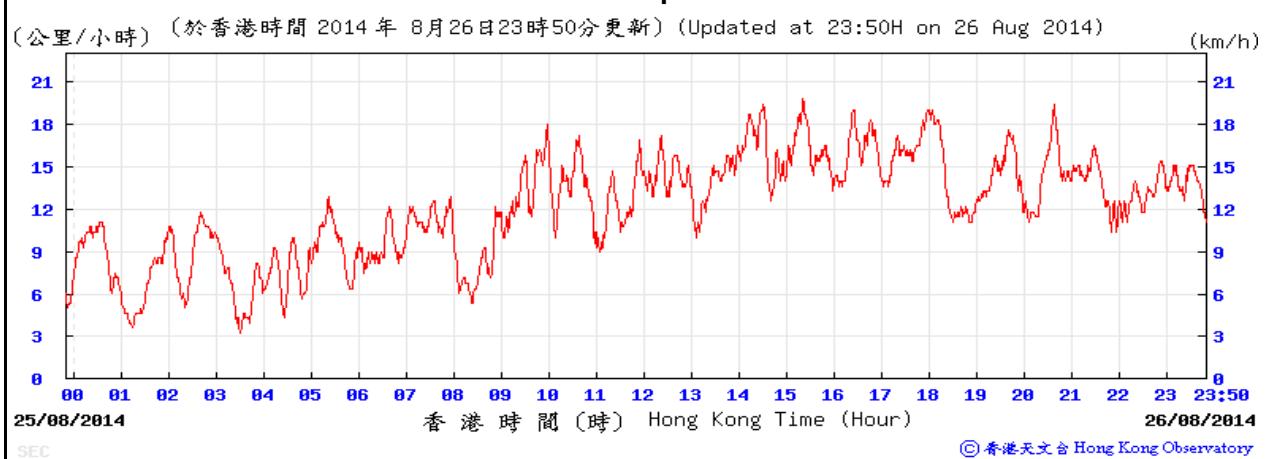


Title Contract No. KL/2010/02 Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works Meteorological data from Hong Kong Observatory Station during Odour Patrol	Scale N.T.S	Project No. MA11017	<b>CINOTECH</b>
	Date Aug 14	Appendix F	

## Meteorological Conditions (Kai Tak)

### Wind Direction


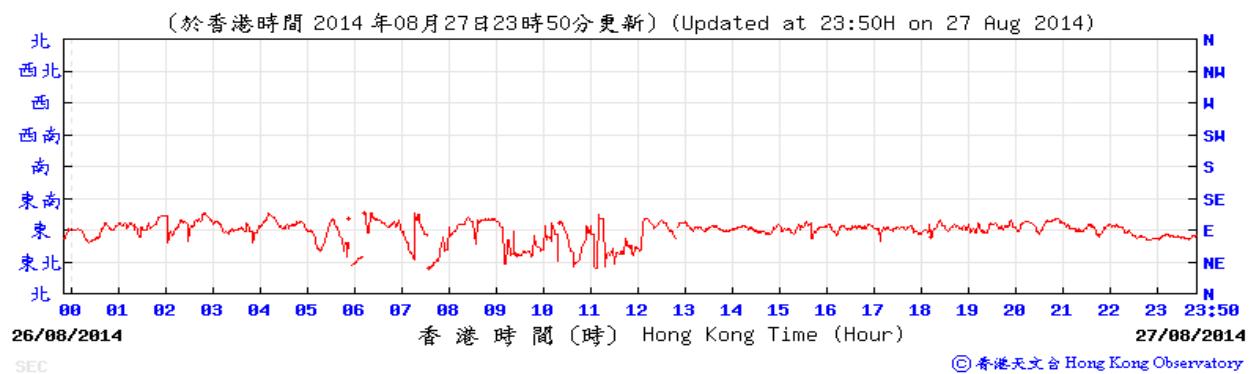


### Wind Speed

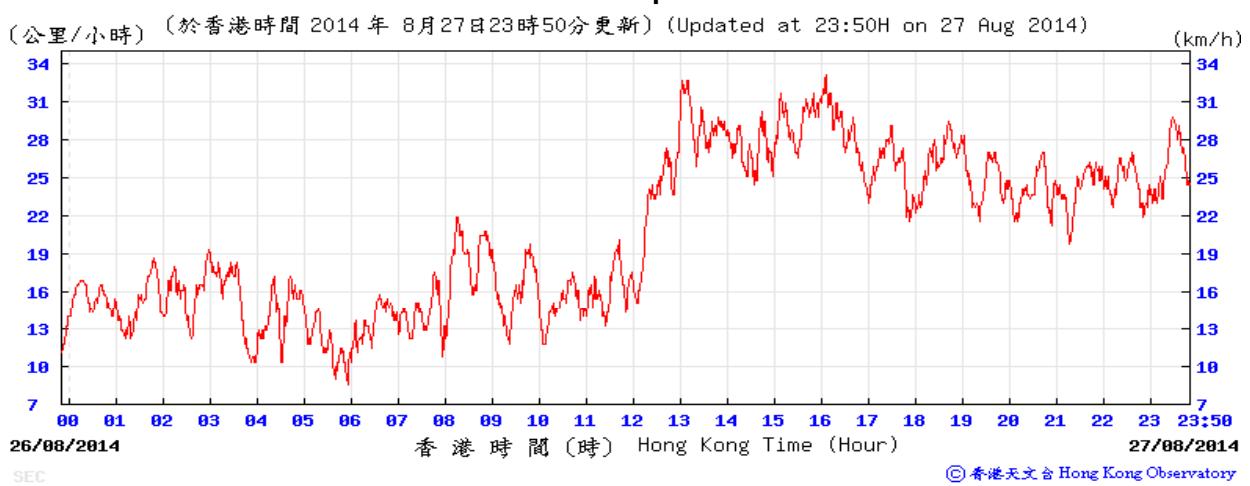

Title Contract No. KL/2010/02 Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works Meteorological data from Hong Kong Observatory Station during Odour Patrol	Scale N.T.S	Project No. MA11017	<b>CINOTECH</b>
	Date Aug 14	Appendix F	

## Predicted Tides at Quarry Bay in August 2014

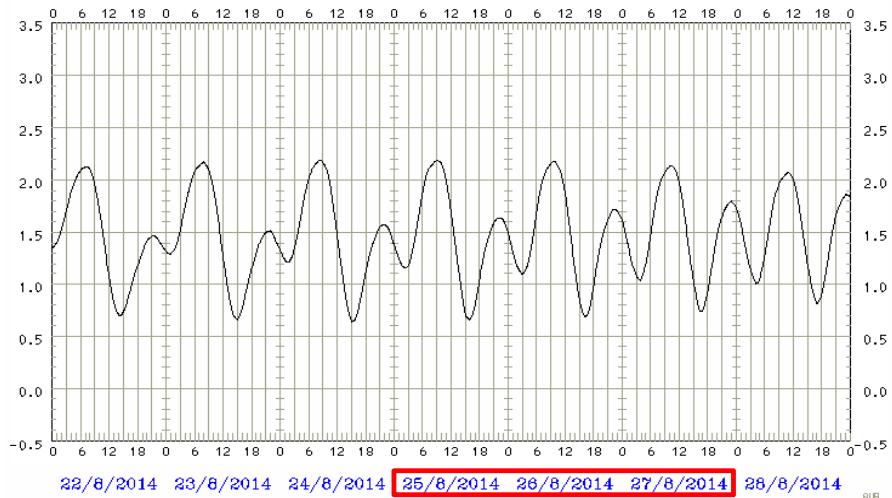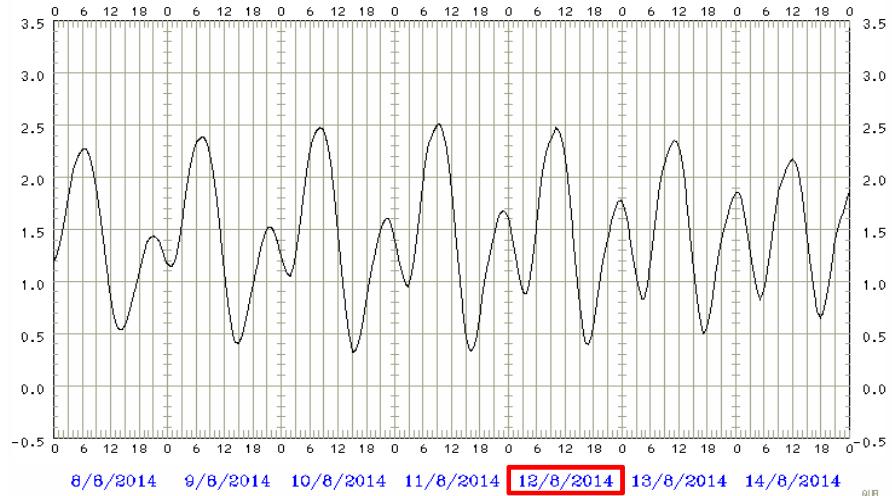

Title Kai Tak Development - Kai Tak Approach Channel and Kwun Tong Typhoon Shelter Improvement Works Meteorological data from Hong Kong Observatory Station during Odour Patrol	Contract No. KL/2010/02	Scale N.T.S	Project No. MA11017	<b>CINOTECH</b>
	Date Aug 14	Appendix F		